Switching Devices – Contactors and Contactor Assemblies – for Switching Motors





	Price groups PG 41A, 41B, 41H, 42F
3/2	Introduction
	Power contactors for switching motors

	switching motors
3/6	General data
3/14	SIRIUS 3RT20 contactors, 3-pole,
	up to 37 kW NEW
3/51	Accessories for 3RT2 contactors NEW
3/77	Spare parts for 3RT2 contactors NEW

3/79 SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW
3/103 SIRIUS 3RT12 vacuum contactors,

3-pole, 110 ... 250 kW

3/108 Accessories for 3RT1 contactors

3/123 Spare parts for 3RT1 contactors

3/127 3TF6 vacuum contactors, 3-pole,

335 ... 450 kW

3/137 3TB5 contactors with DC solenoid system, 3-pole, 55 ... 200 kW
3/145 3TF2 contactors, 3-pole, 2.2 ... 4 kW

Coupling contactors

3/155 SIRIUS 3RT20 coupling contactors (interface), 3-pole, up to 15 kW

Contactor assemblies
3RA23, 3RA13, 3RA24, 3RA14
contactor assemblies

3/160 SIRIUS 3RA23 reversing contactor assemblies Waw
 3/170 SIRIUS 3RA13 reversing contactor assemblies

3/174 SIRIUS 3RA24 contactor assemblies for wye-delta starting **May**


3/188 SIRIUS 3RA14 contactor assemblies for wye-delta starting

Function modules for mounting onto SIRIUS 3RT2 contactors

3/193 Introduction
3/194 SIRIUS function modules
3/198 SIRIUS function modules for IO-Link
3/203 SIRIUS function modules for AS-Interface

NEW

Click on the Article No. in the catalog PDF to access it in the Industry Mall and get all related information.



Or directly in the Internet, e. g. www.siemens.com/product?3RA1943-2C

Notes:

3RT1 contactors in sizes S00/S0 to S12 and 3RA1 contactor assemblies in sizes S00/S0 to S3 can be found

- -in the catalog Add-On IC 10 AO · 2015 at the Information and Download Center
- in the interactive catalog CA 01
- in the Industry Mall

Conversion tool, e.g. from 3RT10 to 3RT20 see www.siemens.com/sirius/conversion-tool

Switching Devices – Contactors and Contactor Assemblies

Power Contactors for Switching Motors

Introduction

Overview





Size Type		S00 3RT201				S0 3RT202						
3RT20 contactors												
Туре		3RT2015	3RT2016	3RT2017	3RT2018	3RT2023	3RT2024	3RT2025	3RT2026	3RT2027	3RT2028	
AC, DC operation		(p. 3/35, 3	/37)			(p. 3/42, 3/	/44, 3/47)					
AC-3												
I _e /AC-3/400 V	Α	7	9	12	16	9	12	17	25	32	38	
400 V	kW	3	4	5.5	7.5	4	5.5	7.5	11	15	18.5	
230 V	kW	1.5	2.2	3	4	2.2	3	4	5.5	7.5	11	
690 V 1 000 V	kW kW	4	5.5	5.5	7.5	7.5	7.5	11	11	18.5	18.5	
1 000 V	N.V.V											
AC-4 (for $I_{a} = 6 \times I_{e}$)												
400 V	kW	3	4	4	5.5	4	5.5	7.5	7.5	11	11	
400 V	, kW	1.15	2	2	2.5	2	2.6	3.5	4.4	6	6	
(200 000 operating cycles)											
AC-1 (40 °C, ≤ 690 V)		40	22	00	22	40	40	40	40	F0	50	
<i>I</i> _e 3RT20	Α	18	22	22	22	40	40	40	40	50	50	
Accessories for conta	actors											
	n front	3RH2911		(p. 3/64)		3RH2911		(p. 3/64)				
blocks	ateral	3RH2911		(p. 3/66)		3RH2921		(p. 3/66)				
Function modules (timin	g relays)	3RA281.		(p. 3/196)		3RA281.		(p. 3/196)				
Function modules (IO-Lin	nk, AS-i)	3RA271	AA00	(p. 3/201,	3/206)	3RA271	AA00	(p. 3/201,	3/206)			
Surge suppressors		3RT2916		(p. 3/71)		3RT2926		(p. 3/71)				
3RU2 and 3RB3 overl	oad rela	ys (Chapt	er 7, "Prot	ection Equ	uipment" -	→ "Overloa	ad Relays"	')				
3RU thermal overload rel		3RU2116			•	3RU2126	1.8 40 A	•				
3RB electronic overload	relays											
For standard application	-	3RB3016	0.1 16 A	\		3RB3026	0.1 40 A					
		3RB3113				3RB3123						
For High-Feature applications	cations		RB23 and 3F 2.G1 curren		n module	3RB22, 3RB23 and 3RB24 with 3RB2906-2.G1 current measuring module						
		OKB2300-	0.3 100	_	inoduic	OKB200-	0.3 100	•	inoduic			
3RV20 motor starter	orotecto	_ ` .	· ·		iipment" –		tarter Prot					
Туре		3RV2011	0.11 16	A		3RV2021	0.45 40	A				
Link modules		3RA2911				3RA2921						
3RA23 reversing conf	tactor as	semblies				·						
Complete units	Туре	3RA2315	3RA2316	3RA2317	3RA2318		3RA2324	3RA2325	3RA2326	3RA2327	3RA2328	
		(p. 3/163)					(p. 3/165)					
400 V	kW	3	4	5.5	7.5		5.5	7.5	11	15	18.5	
Assembly kits/wiring mo	dules	3RA2913-	2AA.	(p. 3/168)			3RA2923-	2AA.	(p. 3/168)			
Function modules		3RA271	BA00	(p. 3/169)			3RA271	BA0	(p. 3/169)			
3RA24 contactor asse	emblie <u>s</u> :	for wye-de	elta star <u>tin</u>	g		<u>'</u>						
Complete units	Туре	3RA2415	3RA2416	3RA2417		3RA2423		3RA2425	3RA2426			
		(p. 3/180)				(p. 3/182)						
400 V	kW	5.5	7.5	11		11		15/18.5	22			
Assembly kits/wiring mo	dules	3RA2913-	2BB.	(p. 3/185)		3RA2923-	2BB.	(p. 3/185)				
Function modules		3RA271	CA00	(p. 3/187)		3RA271	CA00	(p. 3/187)				
Noto:		•				,						

Note:

Safety characteristics for contactors, see Chap. 16, "Appendix" \rightarrow "Standards and Approvals" \rightarrow "Overview".



Size

Type

Type

AC-3 I_e/AC-3/400 V

400 V

230 V

500 V

690 V

1 000 V

400 V

Type

blocks

Type Link modules

400 V

Complete units

3RT10 contactors

AC, DC operation

AC-4 (for $I_a = 6 \times I_e$)

(200 000 operating cycles) **AC-1** $(40 \, ^{\circ}\text{C}, \le 690 \, \text{V})$

3RT14 AC-1 contactors

Accessories for contactors

On front Lateral

> kW 18.5

I_e/AC-1/40 °C/≤ 690 V

Auxiliary switch

Surge suppressors

Box terminal blocks

3RU thermal overload relays

3RB electronic overload relays · For standard applications


· For High-Feature applications

Assembly kits/wiring modules

Terminal covers

Switching Devices – Contactors and Contactor Assemblies Power Contactors for Switching Motors

Introduction

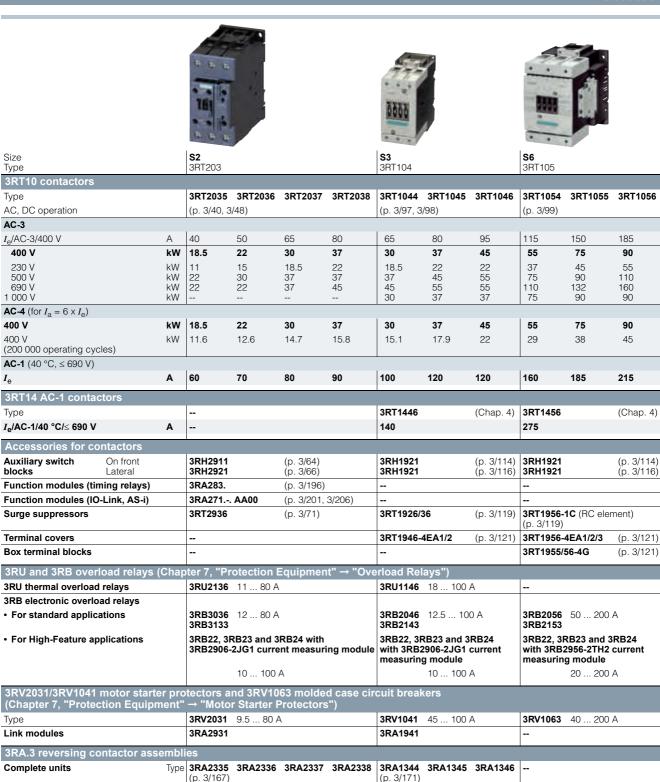

Mechanical interlocks		3RA2934-	2B		(p. 3/169)	3RA2924-	1A/-2B	(p. 3/172)	3RA1954-2A	(p. 3/172)
3RA.4 contactor assemblies for wye-delta starting										
Complete units	Type	3RA2434 (p. 3/184)	3RA2435	3RA2436	3RA2437	3RA1444 (p. 3/191)	3RA145			
400 V	kW	22/30	37	45	55	55	75			
Assembly kits/wiring modules		3RA2933-	2BB./-2C		(p. 3/185)	3RA1943-	2B/-2C	(p. 3/192)	3RA1953-2B	(p. 3/192)
Function modules		3RA271	CA00		(p. 3/187)					

37

(p. 3/168)

30

3RA1943-2A

37

45

(p. 3/173)

55

3RA1953-2A

30

22

3RA2933-2AA.

75

90

(p. 3/173)

Switching Devices – Contactors and Contactor Assemblies

Power Contactors for Switching Motors

Introduction







Size Type		S10 3RT				\$12 3RT1. 7		14 3TF6	
3RT10 contactors	3RT12 and 3TI	-68/69	vacuum c	ontactors					
Type AC, DC operation			1064 3/99)	3RT1065	3RT1066	3RT1075 (p. 3/99)	3RT1076		
Туре			1264 3/107)	3RT1265	3RT1266	3RT1275 (p. 3/107)	3RT1276	3TF68 (p. 3/133)	3TF69
AC-3		*							
I _e /AC-3/400 V	Α	225		265	300	400	500	630	820
400 V	k۱	V 110		132	160	200	250	335	450
230 V	k۷			75	90	132	160	200	260
500 V 690 V	kV 3RT10/3RT12 kV			160 250	200 250	250 400	355 400/500	434 600	600 800
1 000 V	3RT10/3RT12 kV		/315	132/355	132/400	250/560	250/710	600	800
AC-4 (for $I_a = 6 \times I_e$)		•							
400 V	k۱			132	160	200	250	355	400
400 V (200 000 operating cyc	3RT10/3RT12 kV	V 54/7	78	66/93	71/112	84/140	98/161	168	191
AC-1 (40 °C, ≤ 690 V)	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,								
<i>I</i> _e	3RT10/3RT12 A	275/	/330	330	330	430/610	610	700	910
3RT14 AC-1 contac	ctors								
Type		3RT	1466		(Chap. 4)	3RT1476	(Chap. 4)		
<i>I_e</i> /AC-1/40 °C/≤ 690 V	Α	400			· ' '	690	(Griap. 1)		
· ·		100							
Accessories for co									
Auxiliary switch blocks	On front Lateral		11921 11921		(p. 3/114) (p. 3/116)			 3TY7561	(p. 3/135)
Surge suppressors		_	1956-1C (R0	C element)	(p. 3/119)			3TX7572	(p. 3/135)
Terminal covers			· · · · · · · · · · · · · · · · · · ·	-4EA2/-4EA3	(p. 3/121)			3TX7686/696	(p. 3/135)
Box terminal blocks		3RT	1966-4G		(p. 3/121)				· · · · · · · · · · · · · · · · · · ·
3RB2 overload rela	ys (Chapter 7,	"Prote	ection Equ	ipment" → "C	Overload Relay	/s")			
3RB electronic overlo						, - ,			
For standard applications	-		32066 32163	55 250 A or 1	160 630 A				
For High-Feature ap	nlications			and 3RR24 with	1 3RB2966-2WH	2 current measi	uring module		
. og oata. o ap	p		•	63 630 A					
3RV10 molded cas	a airauit braaks	ro (Ch			uinmont" → "	Matar Startar	Protectors"		
	e circuit breake	_,`_	<u> </u>		larbinent →	3RV1083	252 630 A	3RV1083	252 630 A
Type Link modules		3RV	10/3	160 400 A			202 030 A	3RV1083	202 03U A
								-	
3RA13 reversing co									
Complete units		pe		400	400		0.50		
400 V	k\			132	160	200	250	335	/I I I NA 115
Assembly kits/wiring		_	1963-2A		(p. 3/173)	3RA1973-2A	(p. 3/173)	3TX7680-1A	(Industry Mall)
Mechanical interlocks	i 	3RA	1954-2A		(p. 3/172)			3TX7686-1A	(Industry Mall)
3RA14 contactor as	ssemblies for v	vye-de	lta starting	9					
Complete units	Ту	pe 							

(p. 3/192)

3RA1973-2B (p. 3/192)

3TX7680-1B (Industry Mall)

Note:

Assembly kits/wiring modules

Safety characteristics for contactors, see Chap. 16, "Appendix" \rightarrow "Standards and Approvals" \rightarrow "Overview".

kW

3RA1963-2B



Switching Devices – Contactors and Contactor Assemblies Power Contactors for Switching Motors

Introduction

Connection methods

The contactors are available with screw terminals (box terminals or flat connectors) or with spring-type terminals.

Devices of the 3TF2 series are also available for connection with flat connectors and solder pin connectors.

As an option the devices of the 3RT2 series are also available for connection with ring terminal lugs, particularly versions for North America and Japan.

+	Screw terminals
8	Spring-type terminals
•	Flat connectors
ㅂ	Solder pin connections
(1)	Ring terminal lug connections
	The terminals are indicated in the corresponding tables by the symbols shown on orange backgrounds.

Support function

The 3RT20 contactors can also be ordered via an online configurator.



Configurator available in the Industry Mall

The online configurator is indicated in the corresponding tables by the symbol shown on an orange background.

Use of 3RT2 contactors with IE3 motors

Note:

For the use of 3RT2 contactors in conjunction with highly energyefficient IE3 motors, please observe the information on dimensioning and configuring, see

"SIRIUS Industrial controls with IE3 motors", http://support.automation.siemens.com/WW/view/en/94770820

More information, see page 3.


General data

Overview

The SIRIUS family of controls

The SIRIUS modular system with its components for the switching, starting, protection and monitoring of motors and industrial systems stands for the fast, flexible and space-saving construction of control cabinets.

3RT2 contactors and coupling contactors Size S00 with mountable accessories

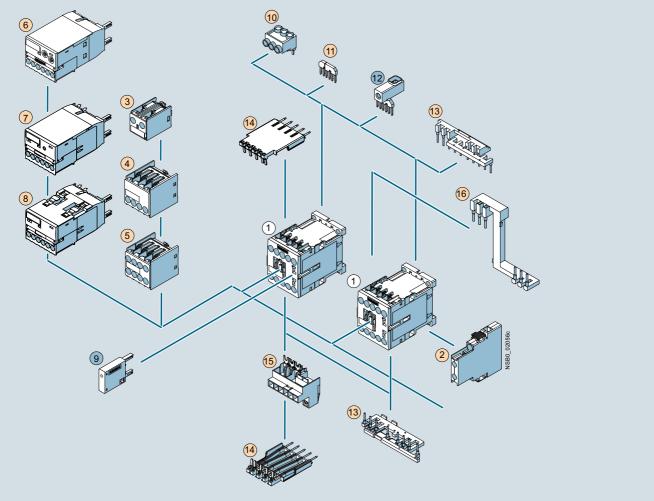

- 1 Contactor size S00
- 2 2-pole auxiliary switch block, laterally mountable
- 3 1-pole auxiliary switch block, for snapping onto the front cable entry from the top
- 4 2-pole auxiliary switch block, for snapping onto the front cable entry from the bottom
- (5) 4-pole auxiliary switch block, for snapping onto the front
- 6 3RA28 function module
- 7 3RA27 function module for AS-Interface, direct starting
- 8 3RA27 function module for IO-Link, direct starting
- 9 Surge suppressor with/without LED
- 10 Three-phase feeder terminal

- 11 Star jumper, 3-pole, without connecting terminal
- Link for paralleling, 3-pole, with connecting terminal
- (13) Wiring modules, on the top and bottom (reversing duty)
- 14 Solder pin adapter
- (15) Connection module (adapter and connector) for contactors with screw-type connection
- 16 Safety main current connector for two contactors
- For contactors
- For contactors and coupling contactors (interface)

Mountable overload relays, see Chapter 7, "Protection Equipment" → "Overload Relays".

Fuseless load feeders, see Chapter 8, "Load Feeders and Motor Starters" → "SIRIUS 3RA2 Load Feeders".


Accessories, see pages 3/59 to 3/76.

Contactor assemblies, see pages 3/163 to 3/165.

Assembly kit for reversing contactor assemblies (mech. interlocking, wiring modules), see page 3/168.

General data


3RT2 contactors and coupling contactors Size S0 with mountable accessories

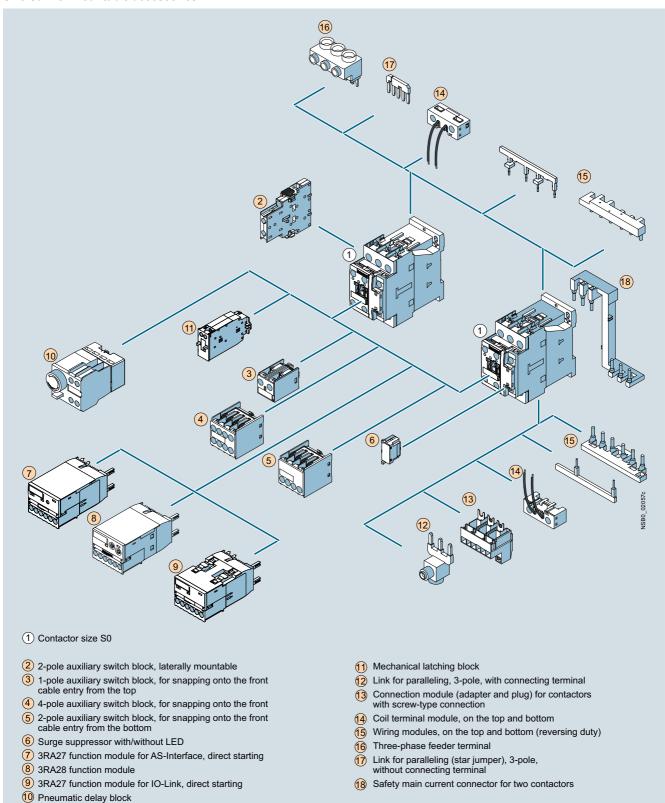

Accessories, see pages 3/59 to 3/76.

General data

3RT2 contactors Size S2 with mountable accessories

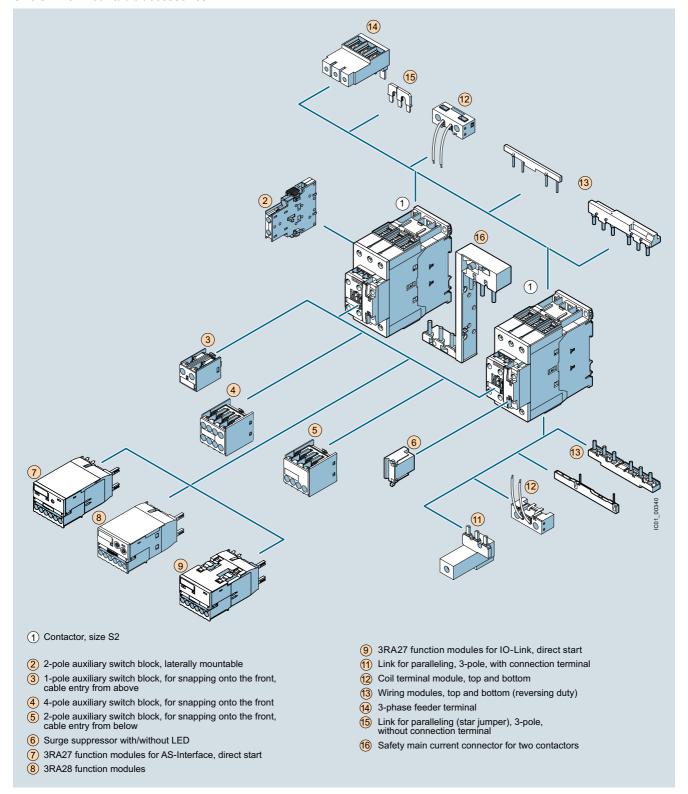


Accessories, see pages 3/59 to 3/76.



General data

3RT1 contactors Size S3 with mountable accessories

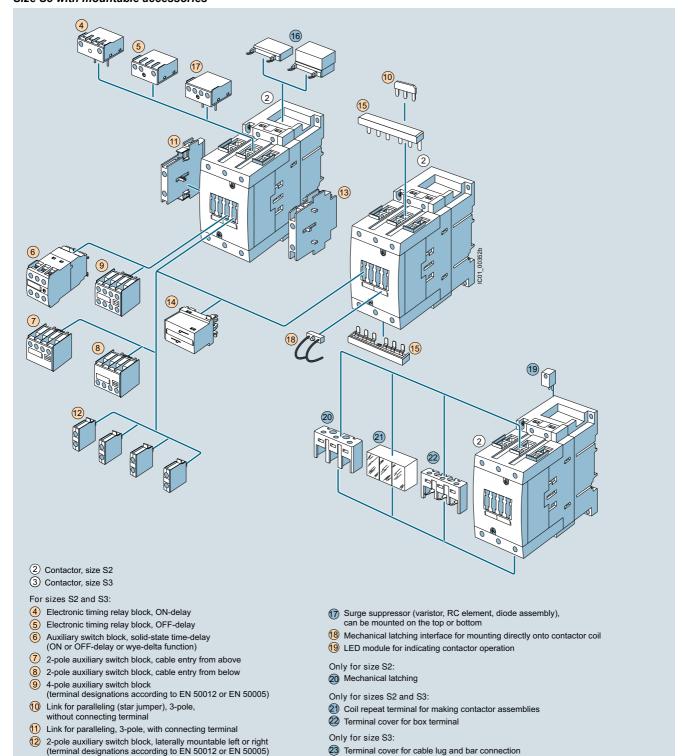

24 Auxiliary conductor terminal, 3-pole

Accessories differ according to size

Accessories identical for sizes S2 and S3

Accessories, see pages 3/114 to 3/122.

Mechanical interlock, laterally mountableMechanical interlock, mountable to the front


3 Single-pole auxiliary switch block (up to 4 can be snapped on)

(6) Wiring connectors on the top and bottom (reversing duty)

Fuseless load feeders, see Chapter 8, "Load Feeders and Motor Starters" → "SIRIUS 3RA1 Load Feeders".

General data

3RT1 contactors Sizes S6 to S12 with mountable accessories (illustration for basic unit)

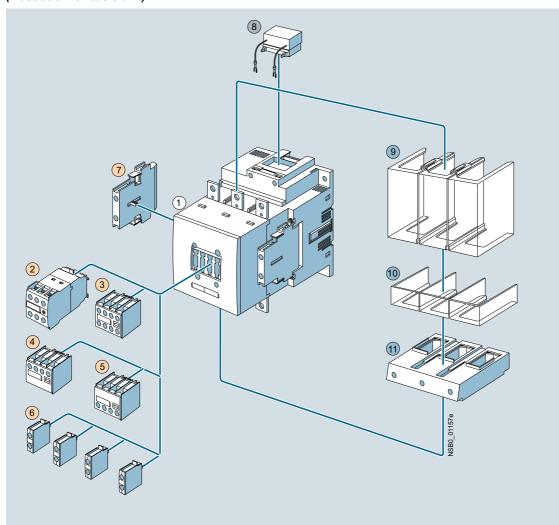

- (1) 3RT10 and 3RT14 air-break contactors, sizes S6, S10 and S12
- 2 Auxiliary switch block, solid-state time-delay (ON or OFF-delay or wye-delta function)
- 3 4-pole auxiliary switch block
 - (terminal designations according to EN 50012 or EN 50005)
- 4 2-pole auxiliary switch block, cable entry from above
- 5 2-pole auxiliary switch block, cable entry from below
- 6 Single-pole auxiliary switch block (up to 4 can be snapped on)
- 2-pole auxiliary switch block, laterally mountable left or right (terminal designations according to EN 50012 or EN 50005) (identical for S0 to S12)
- 8 Surge suppressor (RC element) for plugging into top of withdrawable coil

- Terminal cover for cable lug and busbar connection, different for sizes S6 and S10/S12
- Terminal cover for box terminal, different for sizes S6 and S10/S12
- 11 Box terminal block, different for sizes S6 and S10/S12
- Accessories identical for sizes S0 to S12
- Accessories identical for sizes S6 to S12
- Accessories differ according to size


Accessories, see pages 3/114 to 3/122.

Mountable overload relays, see Chapter 7 "Protection Equipment" → "Overload Relays".



General data

3RA1 contactor assemblies, 3RT1 contactors Size S6 with accessories

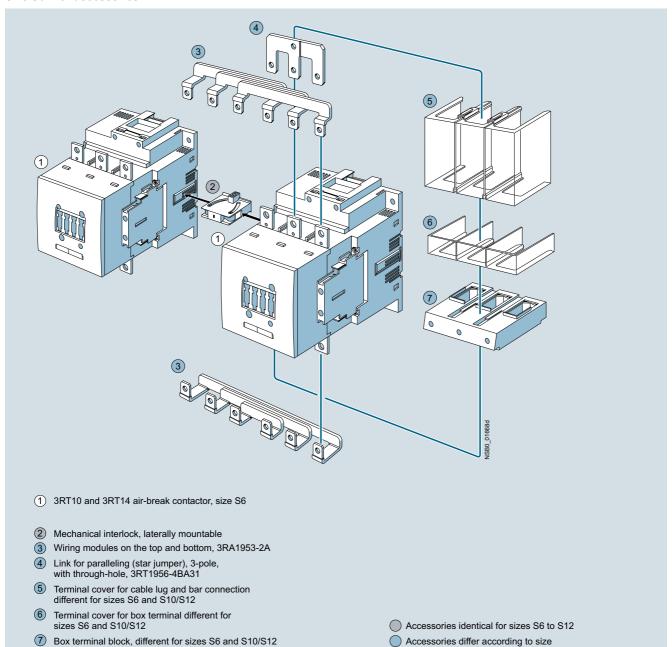


Accessories, see pages 3/172, 3/173 and 3/114 to 3/122.

Mountable overload relays, see Chapter 7, "Protection Equipment" \rightarrow "Overload Relays".

General data

3RA1 contactor assemblies, 3RT1 contactors Sizes S6, S10 and S12 with accessories

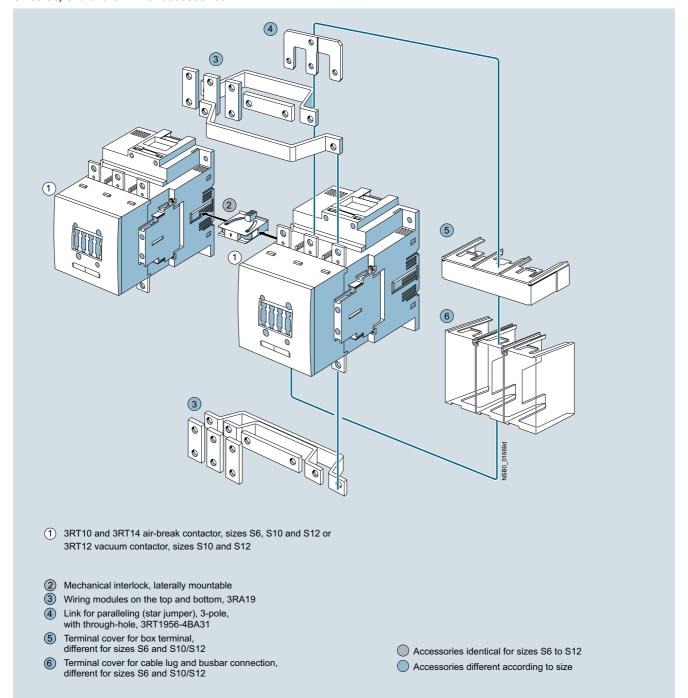


Accessories, see pages 3/172, 3/173 and 3/114 to 3/122.

Mountable overload relays, see Chapter 7, "Protection Equipment" → "Overload Relays".



General data

3RT1 contactors Sizes S6 to S12 with accessories

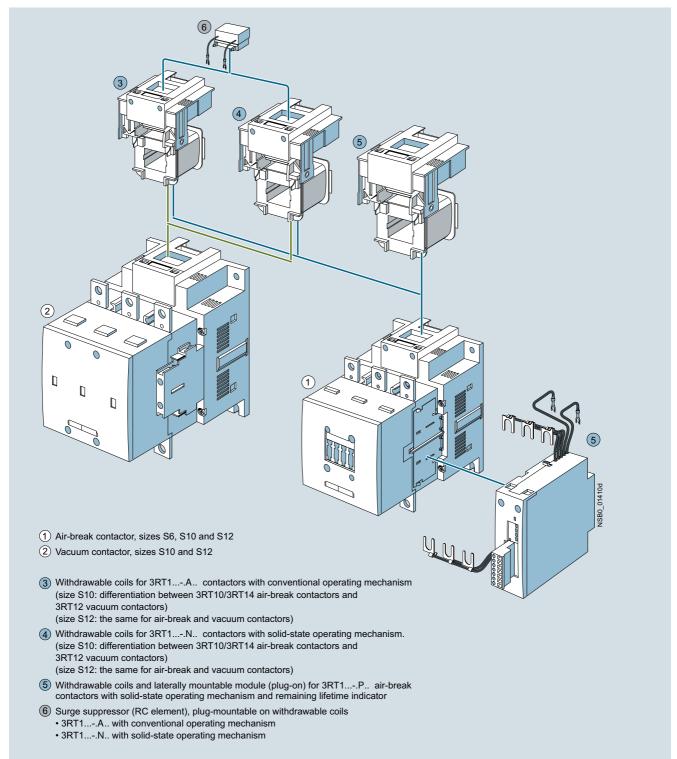

☐ Identical for sizes S6 to S12 ☐ Different according to size

For surge suppressors, see page 3/119, for withdrawable coils, see pages 3/124 and 3/125.

Mountable overload relays, see Chapter 7, "Protection Equipment" → "Overload Relays".

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

Overview

Sizes S00 to S2, up to 37 kW



Contactor size S00 with spring-type terminals and contactor size S0 with screw terminals

Compared to the former 3RT1 series, the 3RT2 series is notable for its higher rating:
• Size S00, up to 7.5 kW

- Size S0, up to 18.5 kW
- Size S2, up to 37 kW

Standards

IEC 60947-1, EN 60947-1,

IEC 60947-4-1, EN 60947-4-1,

IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The 3RT2 contactors are climate-proof and are suitable and tested for use worldwide.

If the devices are used in ambient conditions which deviate from common industrial conditions (IEC 60721-3-3 "Stationary Use, Weather-Protected"), information must be obtained about possible restrictions with regard to the reliability and endurance of the device and possible protective measures. In this case contact our Technical Assistance.

3RT2 contactors are finger-safe according to EN 50274. The devices with ring terminal lug connection comply with degree of protection IP20 when fitted with the related terminal cover

Auxiliary contact complement

Size S00 contactors have an auxiliary contact integrated in the basic unit. The basic units sizes S0 and S2 contain two integrated auxiliary contacts (1 NO + 1 NC).

All basic units (except coupling contactors) can be extended with auxiliary switch blocks:

- Additional auxiliary switches with a maximum of four auxiliary contacts can be mounted. The combination of a 2-pole auxiliary switch for mounting on the front and an auxiliary switch for mounting on the side is not permitted.
- Of the maximum number of auxiliary contacts (integrated plus mountable) possible on the device, no more than four NC contacts are permitted for both sizes.

In addition, complete units with permanently mounted auxiliary switch block (2 NO + 2 NC) are offered for sizes S00 to S2.

Contact reliability

If voltages ≤ 110 V and currents ≤ 100 mA are to be switched, the auxiliary contacts of the 3RT2 contactor or 3RH21 contactor relay should be used as they guarantee a high level of contact reliability

These auxiliary contacts are suitable for electronic circuits with currents ≥ 1 mA at a voltage ≥ 17 V.

Connection methods

The 3RT2 contactors are available with screw terminals, spring-type terminals (up to size S2 only for control circuit) or ring terminal lug connections (not for size S2).

Short-circuit protection of the contactors

For short-circuit protection of contactors without overload relays, see "Technical specifications" on pages 3/19 and 3/24. For short-circuit protection of the contactors with overload relay, see Configuration Manual "Configuring SIRIUS Innovations", http://support.automation.siemens.com/WW/view/en/39714188.

To assemble fuseless motor feeders, you must select combinations of motor starter protector and contactor as explained in "SIRIUS 3RA2 Load Feeders" (see Chapter 8 "Load Feeders and Motor Starters")

Motor protection

3RU21 thermal overload relays or 3RB30 electronic overload relays can be fitted to the 3RT2 contactors for protection against overload. The overload relays must be ordered separately (see Chapter 7, "Protection Equipment" → "Overload relays").

Ratings of three-phase motors

The quoted rating (in kW) refers to the output power on the motor shaft (according to the nameplate).

Control supply voltage

The contactors are available in various basic versions depending on the size:

- AC operation for sizes S00 to S2
- DC operation for sizes S00 and S0
- AC/DC operating mechanism for sizes S0 and S2, which can be operated with AC (50 to 60 Hz) as well as DC

Surge suppression

3RT2 contactors can be retrofitted with RC elements, varistors, diodes or diode assemblies (assembly of diode and Zener diode for short break times) for damping opening surges in the coil.

The surge suppressors are plugged onto the front of size S00 contactors. Space is provided for them next to a snap-on auxiliary switch block.

The surge suppressors can be plugged onto the front of size S0 and S2 contactors.

Note:

The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assembly 2 to 6 times, varistor and suppressor diode +2 to 5 ms).

S00 to S2 contactors with voltage tap-off

The S00 to S2 contactors with voltage tap-off are special versions for mounting the SIRIUS function modules for connection to the control system through IO-Link or AS-Interface (see page 3/198 and 3/203).

Without a function module, the contactors can be used like the standard versions.

Further information on IO-Link and AS-Interface, see Chapter 2 "Industrial Communication".

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

Article No. scheme

Digit of the article No.	1st - 3rd	4th	5th	6th	7th		8th	9th	10th	11th	12th		13th	14th	15th	16th
						-						-				
SIRIUS power contactors	3 R T															
2nd generation		2														
Device type (e.g. 0 = 3-pole motor contactor, 3 = 4-pole AC-1 conta	ctor)															
Contactor size (1 = S00, 2 = S0, 3 = S2)																
Power dependent on size (e.g. 27 = 15 kW)																
Connection type (1 = screw, 2 = spring)																
Operating range / solenoid coil circuit (e.g. A = AC standard / without	out)															
Rated control supply voltage (e.g. P0 = 230 V, 50 Hz)																
Auxiliary switches (e.g. S0: 0 = 1 NO + 1 NC integrated)																
Special version																
Example	3 R T	2	0	2	7	-	1	Α	Р	0	0					

Note:

The article No. scheme is presented here merely for information purposes and for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the catalog in the Selection and ordering data.

Manuals


For more information, see

- System manual "SIRIUS Innovations System Overview", http://support.automation.siemens.com/WW/view/en/60311318
- Manual "SIRIUS Innovations SIRIUS 3RT2 Contactors/ Contactor Assemblies",

http://support.automation.siemens.com/WW/view/en/60306557

Benefits

Advantages through energy efficiency

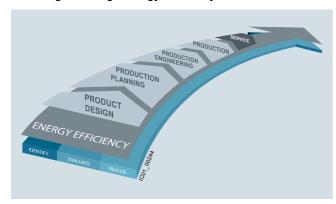

Overview of the energy management process

We offer you a unique portfolio for industrial energy management, using an energy management system that helps to optimally define your energy needs. We split up our industrial energy management into three phases – identify, evaluate, and realize – and we support you with the appropriate hardware and software solutions in every process phase.

The innovative products of the SIRIUS industrial controls portfolio can also make a substantial contribution to a plant's energy efficiency (see www.siemens.com/sirius/energysaving).

3RT20 contactors contribute to energy efficiency throughout the plant as follows:

- UC coils with electric control for reduced power consumption when closing and in the closed state
- Smaller power supply units in the control circuit through lower power consumption in the closed state with 24 V DC
- Reduced heating of control cabinet:
 Technology-reduced inherent power loss of the contactors, resulting in lower cooling costs and a more compact design

Accessories

Auxiliary switch blocks

Terminal designations according to EN 50012 or EN 50005.

Size S00 contactors have an auxiliary contact (NO or NC) integrated in the basic unit. Size S0 and S2 contactors have 2 auxiliary contacts (1 NO and 1 NC) integrated in the basic unit.

The contactors can be expanded with front-mounting 3RH2911 auxiliary switch blocks to form contactors with up to 5 auxiliary contacts (S00) or up to 6 auxiliary contacts (S0 and S2). Of the auxiliary contacts (integrated plus mountable) possible on the device, no more than four NC contacts are permitted.

Single- or 2-pole auxiliary switch blocks with connection options from above or below enable easy and clearly arranged wiring especially for the installation of feeders. These auxiliary switch blocks are offered only with screw terminals.

All the previously mentioned auxiliary switch variants can be snap-fitted onto the front of the contactor. The auxiliary switch block has a centrally positioned release lever for disassembly.

If the installation space is limited in depth, 2-pole auxiliary switch blocks can be attached laterally on the left or on the right. These auxiliary switch blocks can be used only when no 4-pole auxiliary switch blocks are snapped onto the front.

The solid-state compatible 3RH2911-.NF. auxiliary switch blocks include 2 enclosed contacts. They are suitable in particular for switching small voltages and currents (hard gold-plated contacts) and for operation in dusty atmospheres. The front NC auxiliary contacts are not mirror contacts. There are also versions for mounting on the side.

For details of selecting the auxiliary switches, see pages 3/58 to 3/63.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

Technical specifications

Туре			3RT2
Size			S00 to S2
Rated data of the auxiliary contacts			
Acc. to IEC 60947-5-1/EN 60947-5-1 The data apply to integrated auxiliary contacts and cauxiliary switch blocks for contactor sizes S00 to S0	contacts in the		
Rated insulation voltage <i>U</i> _i (pollution degree 3)		V	690
Conventional thermal current I_{th} = Rated operational current $I_e/AC-12$		Α	10
AC load			
Rated operational current I _e /AC-15/AC-14			
 For rated operational voltage U_e 	Up to 230 V	Α	10 ¹⁾
	380 V 400 V 500 V 660 V 690 V	A A A A	3 3 2 1
DC load			
Rated operational current I _e /DC-12			
$ullet$ For rated operational voltage $U_{ m e}$	24 V 60 V 110 V 125 V	A A A	10 6 3 2
	220 V 440 V 600 V	A A A	1 0.3 0.15
Rated operational current I _e /DC-13			
$ullet$ For rated operational voltage U_{e}	24 V 60 V 110 V 125 V	A A A	10 ¹⁾ 2 1 0.9
	220 V 440 V 600 V	A A A	0.3 0.14 0.1
Contact reliability at 17 V, 1 mA according to IEC 60947-5-4/EN 60947-5-4			Frequency of contact faults < 10 ⁻⁸ i.e. < 1 fault per 100 million operating cycles

Endurance of the auxiliary contacts

It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

The contact endurance is mainly dependent on the breaking current.

The characteristic curves apply to:

- Integrated auxiliary contacts on 3RT20
 3RH2911, 3RH2921 auxiliary switch blocks¹⁾

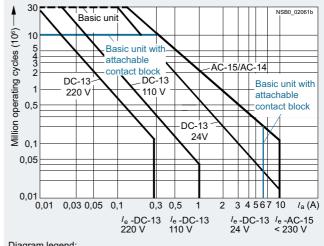


Diagram legend:

 I_a = Breaking current

 $I_{\rm e}$ = Rated operational current

¹⁾ 3RH22, 3RH29, 3RT2. ...-...4: $I_{\rm e}$ = 6 A for AC-15/AC-14 and DC-13.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

Type Size

Endurance of the main contacts

The characteristic curves show the contact endurance of the contactors when switching resistive and inductive AC loads (AC-1/AC-3) depending on the breaking current and rated operational voltage. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply

The rated operational current $I_{\rm e}$ complies with utilization category AC-4 (breaking six times the rated operational current) and is intended for a contact endurance of at least 200 000 operating cycles.

If a shorter contact endurance is sufficient, the rated operational current I_e /AC-4 can be increased.

If the contacts are used for mixed operation, i.e. normal switching (breaking the rated operational current according to utilization category AC-3) in combination with intermittent inching (breaking several times the rated operational current according to utilization category AC-4), the contact endurance can be calculated approximately from the following equation:

$$X = \frac{A}{1 + \frac{C}{100} \left(\frac{A}{B} - 1\right)}$$

Characters in the equation:

- X Contact endurance for mixed operation in operating cycles
- A Contact endurance for normal operation ($I_a = I_e$) in operating cycles
- B Contact endurance for inching $(I_a = \text{multiple of } I_e)$ in operating cycles
- C Inching operations as a percentage of total switching operations

3RT2 S00 to S0

Size S00

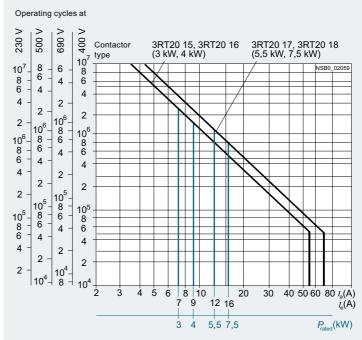


Diagram legend:

P_{rated} = Rated power for squirrel-cage motors at 400 V

L₀ = Breaking current

= Breaking current

 $\bar{I}_{\rm e}$ = Rated operational current

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

Type Size

Contact endurance of the main contacts

The characteristic curves show the contact endurance of the contactors when switching resistive and inductive AC loads (AC-1/AC-3) depending on the breaking current and rated operational voltage. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply

The rated operational current $I_{\rm e}$ complies with utilization category AC-4 (breaking six times the rated operational current) and is intended for a contact endurance of at least 200 000 operating cycles.

If a shorter contact endurance is sufficient, the rated operational current I_e /AC-4 can be increased.

If the contacts are used for mixed operation, i.e. normal switching (breaking the rated operational current according to utilization category AC-3) in combination with intermittent inching (breaking several times the rated operational current according to utilization category AC-4), the contact endurance can be calculated approximately from the following equation:

$$X = \frac{A}{1 + \frac{C}{100} \left(\frac{A}{B} - 1\right)}$$

Characters in the equation:

- X Contact endurance for mixed operation in operating cycles
- A Contact endurance for normal operation ($I_a = I_e$) in operating cycles
- B Contact endurance for inching $(I_a = \text{multiple of } I_e)$ in operating cycles
- C Inching operations as a percentage of total switching operations

3RT2 S00 to S0

Size S0

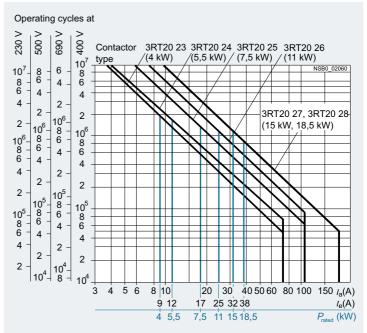


Diagram legend:

 P_{rated} = Rated power for squirrel-cage motors at 400 V I_{a} = Breaking current

 \vec{I}_{a} = Rated operational current



		SIRIUS 3R120 c	ontactors, 3-pole, up to 37 kW
_			
Туре		3RT2015, 3RT2016	3RT2017, 3RT2018
Size	1 🗟	S00	S00
Dimensions (W x H x D) ''	☐ mm	45 x 57.5 x 73 / 45 x 70 x 73	
With mounted auxiliary switch block With mounted for attack and a sale left. Which are contacted for attack and a sale left.	mm o	45 x 57.5 x 116 / 45 x 70 x 121	
With mounted function module	→l≯ mm	45 x 57.5 x 142 / 45 x 70 x 142	
General technical specifications			
Permissible mounting position			
The contactors are designed for operation on a		360° 22,5° 22,5° ଛ	
vertical mounting surface.		NSB ₀ .	
		<i>x</i>	
Upright mounting position		NSB0_00477a Special version required	
Mechanical endurance			
Basic units	Operating cycles	30 million	
Basic units with snap-on auxiliary switch block Solid-state compatible auxiliary switch block	Operating cycles Operating cycles		
Electrical endurance		For contact endurance of the main	n contacts, see page 3/17.
Rated insulation voltage U_i (pollution degree 3)	V	690	
Rated impulse withstand voltage U _{imp}	kV	6	
Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N	V	400	
Mirror contacts			
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. • 3RT201., 3RT231. (removable auxiliary switch block)	d	Vas this applies to both the basic	unit as well as to between the basic unit
	1.	and the mounted auxiliary switch b	block acc. to IEC 60947-4-1, Appendix F
 3RT201., 3RT231. (permanently mounted auxiliary switch bloc 3RH2919NF solid-state compatible auxiliary switch blocks 	K)	Yes, acc. to IEC 60947-4-1, Apper Have no mirror contact for size S0	
Ambient temperature		Tiave ne miner contact for 6/20 00	
During operation	°C	-25 +60	
During storage	°C	-55 +80	
Degree of protection acc. to IEC 60947-1, Appendix C		IP20	
Touch protection acc. to EN 50274		Finger-safe	
Shock resistance rectangular pulse		Tinger saic	
AC operation	<i>g</i> /ms	6.7/5 and 4.2/10	7.3/5 and 4.7/10
DC operation	<i>g</i> /ms	6.7/5 and 4.2/10	7.3/5 and 4.7/10 7.3/5 and 4.7/10
Shock resistance sine pulse	9,1110	0.770 drid 1.2710	7.070 and 1.7710
AC operation	<i>g</i> /ms	10.5/5 and 6.6/10	11.4/5 and 7.3/10
• DC operation	<i>g</i> /ms	10.5/5 and 6.6/10	11.4/5 and 7.3/10
Conductor cross-sections	9,1110	For conductor cross-sections, see	
Short-circuit protection			, page 5,20.
Main circuit			
 Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1 			
- Type of coordination "1"	A	35	50
- Type of coordination "2" - Weld-free ²⁾	A A	20 10	25 10
Miniature circuit breakers (up to 230 V) with C characteristic Short-circuit current 1 kA, type of coordination "1"	A	10	10
Auxiliary circuit			
Short-circuit test acc. to IEC 60947-5-1/EN 60947-5-1			
 with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current f_k = 1 kA 	А	10	
• with 230 V miniature circuit breakers, C characteristic	А	6	
with short-circuit current $I_k = 400 \text{ A}$ Short-circuit protection for contactors with overload relays		See Configuration Manual "Configuration Manu	
Short-circuit protection for fuseless load feeders		http://support.automation.siemens See Chapter 8 "Load Feeders and	s.com/WW/view/en/39714188.
		Control Cabinet" → "SIRIUS 3RA2	

 $^{^{1)}\,}$ Dimensions for devices with screw terminals / spring-type terminals.

²⁾ Test conditions according to IEC 60947-4-1.

Туре			3RT2015, 3RT2016	3RT2017, 3RT2018
Size			S00	S00
Control				
Solenoid coil operating range				
AC operation	50 Hz 60 Hz		0.8 1.1 x <i>U</i> _s 0.85 1.1 x <i>U</i> _s	
DC operation	Up to 50 °C Up to 60 °C		0.8 1.1 x U _s 0.85 1.1 x U _s	
Power consumption of the solenoid coils (for cold c	oil and 1.0 x <i>U</i> _s)			
 AC operation, 50/60 Hz, standard version Closing P.f. Closed P.f. 		VA VA	27/24.3 0.8/0.75 4.2/3.3 0.25/0.25	37/33 0.8/0.75 5.7/4.4 0.25/0.25
 AC operation, 50 Hz, for USA/Canada Closing P.f. for closing Closed P.f. for closed 		VA VA	26.4 0.81 4.4 0.24	36 0.8 5.9 0.24
 AC operation, 60 Hz, for USA/Canada Closing P.f. for closing Closed P.f. for closed 		VA VA	31.7 0.81 4.8 0.25	43 0.8 6.5 0.25
 DC operation (closing = closed) 		W	4	4
Permissible residual current of the electronics (with	0 signal)			
AC operation			$< 3 \text{ mA x } (230 \text{ V/}U_{\text{s}})^{1)}$	$< 4 \text{ mA x } (230 \text{ V/}U_{\text{S}})^{1)}$
DC operation			$< 10 \text{ mA x } (24 \text{ V/}U_{\rm S})^{1)}$	
Operating times ²⁾				
Total break time = Opening delay + Arcing time				
• AC operation for 0.8 1.1 x U _S	Closing delay Opening delay	ms ms	9 35 3.5 14	8 33 4 15
• DC operation for 0.85 1.1 \times $U_{\rm S}$	Closing delay Opening delay	ms ms	30 100 7 13	30 100 7 13
Arcing time		ms	10 15	10 15
Operating times for 1.0 x $U_{\rm S}^{(2)}$				
AC operation	Closing delay Opening delay	ms ms	9.5 24 4 14	9 22 4.5 15
DC operation	Closing delay Opening delay	ms ms	35 50 7 12	35 50 7 12

The 3RT2916-1GA00 additional load module is recommended for higher residual currents.

²⁾ The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assembly 2 to 6 times, suppressor diode +1 ms to 5 ms; varistor +2 ms to 5 ms).



Туре			3RT2015	3RT2016	3RT2017	3RT2018
Size			S00	S00	S00	S00
Main circuit						
Load rating with AC						
Utilization category AC-1, Switching resistive loads						
 Rated operational current I_e 	At 40 °C up to 690 V At 60 °C up to 690 V	A A	18 16	22 20	22 20	22 20
• Rated power for AC loads ¹⁾ P.f.= 0.95 (at 60 °C)	230 V 400 V 690 V	kW kW kW	6 10.5 18	7.5 13 22	7.5 13 22	7.5 13 22
$ullet$ Minimum conductor cross-section for loads with I_{e}	At 40 °C At 60 °C	mm^2 mm^2	2.5 2.5	4 2.5	4 2.5	4 2.5
Utilization categories AC-2 and AC-3						
 Rated operational currents I_e 	Up to 400 V 440 V 500 V 690 V	A A A	7 7 6 4.9	9 9 7.7 6.7	12 11 9.2 6.7	16 14 12.4 8.9
Rated power for slipring or squirrel-cage motors at 50 and 60 Hz	At 230 V 400 V 690 V	kW kW kW	1.5 3 4	2.2 4 5.5	3 5.5 5.5	4 7.5 7.5
Thermal load capacity	10 s current ²⁾	Α	56	72	96	128
Power loss per conducting path	At I _e /AC-3	W	0.42	0.7	1.24	2.2
Utilization category AC-4 (for $I_a = 6 \times I_e$) ³⁾						
Maximum values:						
- Rated operational current I _e	Up to 400 V	Α	6.5	8.5	8.5	11.5
 Rated power for squirrel-cage motors with 50 Hz and 60 Hz 	Up to 400 V	Α	3	4	4	5.5
 The following applies to a contact endurance of about 200 000 operating cycles: 						
- Rated operational currents $I_{\rm e}$	Up to 400 V 690 V	A A	2.6 1.8	4.1 3.3	4.1 3.3	5.5 4.4
- Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 230 V 400 V 690 V	kW kW kW	0.67 1.15 1.15	1.1 2 2.5	1.1 2 2.5	1.5 2.5 3.5

¹⁾ Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).

According to IEC 60947-4-1. Rated values for various start-up conditions, see Chapter 7, "Protection Equipment"

"Overload Relays".

³⁾ These data also apply to 3RT2516 and 3RT2517 (2 NO + 2 NC) up to a rated operational voltage of 400 V.

Tupo			3RT2015	2DT2046	3DT2047	3RT2018
Type Size			3R12015 S00	3RT2016 S00	3RT2017 S00	3R12018 S00
Main circuit			300	300	300	300
Load rating with DC						
Utilization category DC-1,						
switching resistive loads (<i>L/R</i> ≤ 1 ms)						
 Rated operational currents I_e (at 60 °C) 						
- 1 conducting path	Up to 24 V	Α	15	20		
	60 V 110 V	A A	15 1.5	20 2.1		
	220 V	A	0.6	0.8		
	440 V	Α	0.42	0.6		
	600 V	Α	0.42	0.6		
- 2 conducting paths in series	Up to 24 V 60 V	A A	15 15	20 20		
	110 V	A	8.4	12		
	220 V	Α	1.2	1.6		
	440 V	A	0.6	0.8		
- 3 conducting paths in series	600 V Up to 24 V	A A	0.5 15	0.7 20		
- 3 conducting paths in series	60 V	A	15	20		
	110 V	Α	15	20		
	220 V 440 V	A A	15 0.9	20 1.3		
	600 V	A	0.7	1.3		
Utilization category DC-3/DC-5,						
shunt-wound and series-wound motors ($L/R \le 15$ ms)						
 Rated operational currents I_e (at 60 °C) 						
- 1 conducting path	Up to 24 V 60 V	A A	15 0.35	20 0.5		
	110 V	A	0.1	0.15		
	220 V	Α				
	440 V 600 V	A A				
- 2 conducting paths in series	Up to 24 V	A	15	20		
2 defiduoting patrio in defide	. 60 V	Α	3.5	5		
	110 V	Α	0.25	0.35		
	220 V 440 V	A A				
	600 V	A				
- 3 conducting paths in series	Up to 24 V	Α	15	20		
	60 V 110 V	A A	15 15	20 20		
	220 V	Α	1.2	1.5		
	440 V	Α	0.14	0.2		
Consider him on Face and a service	600 V	Α	0.14	0.2		
Switching frequency						
Switching frequency z in operating cycles/hour Contactors without overload relays						
No-load switching frequency	AC/DC	h ⁻¹	10 000			
Switching frequency z during rated operation 1)	ACIDO	11	10 000			
- I _a /AC-1	At 400 V	h ⁻¹	1 000			
- I _e /AC-2	At 400 V	h ⁻¹	750			
- I _o /AC-3 - I _o /AC-4	At 400 V At 400 V	h ⁻¹ h ⁻¹	750 250			
- 1 _e /AC-4 Contactors with overload relays	At 400 V	11	200			
Mean value		h ⁻¹	15			
			10			

¹⁾ Dependence of the switching frequency z' on the operational current I' and operational voltage U': $z' = z \times (I_0/I') \times (400 \text{ V/U'})^{1.5} \times 1/\text{h}$



Туре		3RT2015	3RT2016	3RT2017	3RT2018
Size		S00	S00	S00	S00
Conductor cross-sections					
Main and auxiliary conductors (1 or 2 conductors can be connected)		Screw term	inals		
Solid or stranded	mm ²	2 x (0.5 1.5) ¹⁾ ;	2 x (0.75 2.5) ¹⁾ ;	max. 2 x 4	
 Finely stranded with end sleeves (DIN 46228-1) 	mm ²	2 x (0.5 1.5) ¹⁾ ;			
AWG cables, solid or stranded	AWG		x (18 14) ¹⁾ ; 2 x	12	
Terminal screw		M3 (for Pozidriv s	ize 2, Ø 5 6)		
Tightening torque	Nm	0.8 1.2 (7 10).3 lb.in)		
Main conductors, auxiliary conductors and coil terminals ²⁾ (1 or 2 conductors can be connected)		Spring-type	terminals		
• Operating devices ³⁾	mm	3.0 x 0.5			
Solid or stranded	mm ²	2 x (0.5 4)			
• Finely stranded with end sleeves (DIN 46228-1)	mm^2	2 x (0.5 2.5)			
Finely stranded without end sleeve	mm^2	2 x (0.5 2.5)			
AWG cables, solid or stranded	AWG	2 x (20 12)			
Auxiliary conductors for front and laterally mounted auxiliary switches ²⁾ (1 or 2 conductors can be connected)					
• Operating devices ³⁾	mm	3.0 x 0.5			
Solid or stranded	mm^2	2 x (0.5 2.5)			
• Finely stranded with end sleeves (DIN 46228-1)	mm^2	2 x (0.5 1.5)			
Finely stranded without end sleeve	mm^2	2 x (0.5 2.5)			
AWG cables, solid or stranded	AWG	2 x (20 14)			
Main conductors and auxiliary conductors		Ring termin	nal lug connection	ns	
• Terminal screw		M3, Pozidriv 2			
• Operating devices	mm	Ø 5 6			
• Tightening torque	Nm	0.8 1.2			
Usable ring terminal lugs	mm	$d_2 = min. 3.2$			
- DIN 46234 without insulation sleeve - DIN 46225 without insulation sleeve - DIN 46237 with insulation sleeve - JIS C2805 Type R without insulation sleeve - JIS C2805 Type RAP with insulation sleeve - JIS C2805 Type RAP with insulation sleeve	mm	$d_3 = \text{max. } 7.5$			

- 1) If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.
- 2) Max. external diameter of the cable insulation: 3.6 mm. On spring-type terminals with conductor cross-sections ≤ 1 mm², an insulation stop must be used, see Accessories, page 3/76.
- 3) Tool for opening the spring-type terminals, see "Accessories", page 3/76.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

SIKIOS SKIZU COIIIactors, 3-pole, up to 37 kW						
Туре		3RT2023 3RT2024	3RT2025	3RT2026	3RT2027	3RT2028
Size		SO SO	S0	SO	SO	SO
Dimensions (W x H x D) for AC operation ¹⁾	mm	45 x 85 x 97 / 45 x 101				
With mounted auxiliary switch block		45 x 85 x 141 / 45 x 10				
With mounted function module	mm	45 x 85 x 166 / 45 x 10				
Dimensions (W x H x D) for DC operation 1)	mm	45 x 85 x 107 / 45 x 10				
With mounted auxiliary switch block	mm	45 x 85 x 151 / 45 x 10				
With mounted function module	mm	45 x 85 x 176 / 45 x 10				
General data		10 % 00 % 11 0 7 10 % 10	1.0 % 1.7 0			
Permissible mounting position						
The contactors are designed for operation on a		360° 22.5° 22.5°	8			
vertical mounting surface.			NSB0_0047			
Upright mounting position						
		NSB0_00477a Special version require	d also annlie	s to		
		3RT202K.40. coupl				
Mechanical endurance						
• Basic units Opera	ating cycles	10 million				
Basic units with snap-on auxiliary switch block Opera	ating cycles	10 million				
Solid-state compatible auxiliary switch block Opera	ating cycles	5 million				
Electrical endurance		2)				
Rated insulation voltage U _i (pollution degree 3)	V	690				
Rated impulse withstand voltage $U_{\rm imp}$	kV	6				
Protective separation between the coil and the main contacts (acc. to IEC 60947-1, Appendix N)	V	400				
Mirror contacts A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. • Integrated auxiliary switches		Yes, acc. to IEC 60947	-4-1 Annendi	v F		
3RT202., 3RT232. (removable auxiliary switch block) 3RT202., 3RT232. (permanently mounted auxiliary switch block)		Yes, acc. to IEC 60947 Yes, acc. to IEC 60947	-4-1, Appendi	x F		
Permissible ambient temperature						
During operation	°C	-25 +60				
During storage Parama of materials and a 150 00047.1. Assumed to 0.	*C	-55 +80				
Degree of protection acc. to IEC 60947-1, Appendix C		IP20				
Touch protection acc. to EN 50274		Finger-safe				
Shock resistance rectangular pulse	,	7.5/5		0.0/5	- 0.40	
AC operationDC operation	<i>g</i> /ms <i>g</i> /ms	7.5/5 and 4.7/10 10/5 and 7.5/10		8.3/5 and 5 10/5 and 7		
Shock resistance sine pulse	y/IIIs	10/5 and 7.5/10		10/3 and 7	.5/10	
AC operation	almo	11.8/5 and 7.4/10		13.5/5 and	8 3/10	
DC operation	<i>g</i> /ms <i>g</i> /ms	15/5 and 7.4/10		15/5 and 1		
Conductor cross-sections	9,1113	3)		.5,5 414 1	-,	
Short-circuit protection						
Main circuit		Short-circuit protection	for contactors	s with overla	ad relave	
 Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1 		See Configuration Man Short-circuit protection See Chapter 8, "Load F Control Cabinet" — "SIF	ual "Configurion for fuseless to eeders and M	ng SIRIUS In oad feeders Notor Starters	novations" 4)	
- Type of coordination "1"	A	63		100	125	
 Type of coordination "2" Weld-free⁵⁾ 	A A	25 10		35 16	50 16	
Miniature circuit breakers with C characteristic	A	25		32	40	
(short-circuit current 3 kA, type of coordination "1") Auxiliary circuit						
• Fuse links, operational class gG: DIAZED, type 5SB; NEOZED, type 5SE (weld-free protection $I_k \le 1$ kA)	А	10				
 Miniature circuit breakers 230 V, C characteristic (short-circuit current I_k < 400 A) 	А	10				
 Dimensions for devices with screw terminals / spring-type terminals. For contact endurance of the main contacts, see page 3/17. For conductor cross-sections, see page 3/28. 		See http://support.aut Test conditions accord			//view/en/397	14188

3) For conductor cross-sections, see page 3/28.



Гуре		3RT2023 3RT2025	3RT2026 3RT2028	3RT202. NB3	3RT202. NF3	3RT202. NP3
Size		S0	S0	S0	S0	S0
Control						
Type of operating mechanism		AC or DC		UC (AC/DC	,	
Solenoid coil operating range	AC/DC	0.8 1.1 x L	J _s	0.7 1.3 x	<i>U</i> _S ¹⁾	
Power consumption of the solenoid coils (for cold coil and 1.0 x $\it U$	/ _s)					
• AC operation, 50 Hz, standard version						
- Closing - P.f.	VA	65 0.82	77 0.82	6.6 0.98	11.9 0.98	12.7 0.98
- Closed	VA	7.6	9.8	1.9	1.6	3.9
- P.f.		0.25	0.25	0.86	0.79	0.51
AC operation, 50/60 Hz, standard version						
- Closing - P.f.	VA	68/67 0.72/0.74	81/79 0.72/0.74	6.6/6.7 0.98/0.98	11.9/12.0 0.98/0.98	12.7/14.7 0.98/0.98
- Closed	VA	7.9/6.5	10.5/8.5	1.9/2.0	1.6/1.8	3.9/4.3
- P.f.		0.25/0.28	0.25/0.28	0.86/0.82	0.79/0.74	0.51/0.56
AC operation, 50 Hz, for USA/Canada						
- Closing - P.f.	VA	65 0.82	77 0.82			
- Closed	VA	7.6	9.8			
- P.f.		0.25	0.28			
AC operation, 60 Hz, for USA/Canada						
- Closing	VA	73	87			
- P.f. - Closed	VA	0.76 7.2	0.76 9.4			
- P.f.		0.28	0.28			
DC operation (closing = closed)	W	5.9/5.9	5.9/5.9	5.9/1.4	10.2/1.3	14.3/1.9
Permissible residual current of the electronics (with 0 signal)						
• AC operation	mA	<6 mA x (230 V/U _s)	<7 mA x (23	60 V/ <i>U</i> _s)		
DC operation	mA	<16 mA x (24	4 V/ <i>U</i> _s)			
Operating times for 0.8 1.1 x $m{\textit{U}}_{ m s}^{2)}$						
Total break time = Opening delay + Arcing time						
• AC operation						
- Closing delay - Opening delay	ms ms	9 38 4 16	8 40 4 16	60 80 30 45	50 70 35 45	60 80 35 45
DC operation						
- Closing delay - Opening delay	ms ms	50 170 15 17.5	50 170 15 17.5	60 75 30 45	50 70 35 45	50 75 40 50
• Arcing time	ms	10	10	10	10	10
Operating times for 1.0 x $U_{ m s}^{(2)}$						
• AC operation						
- Closing delay - Opening delay	ms ms	10 18 4 16	10 17 4 16	65 80 30 45	50 70 35 45	60 80 30 50
DC operation						
- Closing delay - Opening delay	ms ms	55 80 16 17	55 80 16 17	60 80 30 45	56 70 35 45	60 80 30 50

The following applies to U_{S max} = 280 V: Upper limit = 1.1 x U_{S max}.
 The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (varistor +2 ms to 5 ms, diode assembly: 2 to 6 times).

Туре			3RT2023	3RT2024	3RT2025	3RT2026	3RT2027	3RT2028
Size			S0	S0	S0	S0	S0	S0
Main circuit								
Load rating with AC								
Utilization category AC-1, Switching resistive loads								
	At 40 °C up to 690 V At 60 °C up to 690 V	A A	40 35				50 42	
• Rated power for AC loads ¹⁾ P.f. = 0.95 (at 60 °C)	230 V 400 V 690 V	kW kW kW	13.3 23 40				15.5 27.5 47.5	
 Minimum conductor cross-section for loads with I_e 	At 40 °C At 60 °C	mm ² mm ²	10 10				10 10	
Utilization categories AC-2 and AC-3								
$ullet$ Rated operational currents $I_{ m e}$	Up to 400 V 440 V 500 V 690 V	A A A	9 9 9	12 12 12 9	17 17 17 13	25 22 18 13	32 32 32 21	38 35 32 21
Rated power for slipring or squirrel-cage motors at 50 and 60 Hz	At 230 V 400 V 690 V	kW kW kW	2.2 4 7.5	3 5.5 7.5	4 7.5 11	5.5 11 11	7.5 15 18.5	11 18.5 18.5
Thermal load capacity	10 s current ²⁾	Α	80	110	150	200	260	300
Power loss per conducting path	At I _e /AC-3	W	0.4	0.5	0.9	1.6	2.7	3.8
Utilization category AC-4 (for $I_a = 6 \times I_{\theta}$)								
Maximum values:								
 Rated operational current I_e 	Up to 400 V	Α	8.5	12.5	15.5	15.5	22	
 Rated power for squirrel-cage motors with 50 Hz and 60 Hz 	At 400 V	kW	4	5.5	7.5	7.5	11	
The following applies to a contact endurance of about 200 000 operating cycles:	ee							
- Rated operational currents I_{e}	Up to 400 V 690 V	A A	4.1 3.3	5.5 5.5	7.7 7.7	9 9	12 12	
Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 110 V 230 V 400 V 690 V	kW kW kW kW	0.5 1.1 2 2.5	0.73 1.5 2.6 4.6	1 2 3.5 6	1.2 2.5 4.4 7.7	1.6 3.4 6 10.3	

¹⁾ Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).

According to IEC 60947-4-1.
 Rated values for various start-up conditions, see Chapter 7, "Protection Equipment" → "Overload Relays".



					_			
Туре			3RT2023	3RT2024	3RT2025	3RT2026	3RT2027	3RT2028
Size			S0	S0	S0	S0	S0	S0
Main circuit								
Load rating with DC								
Utilization category DC-1, switching resistive loads (<i>L/R</i> ≤ 1 ms)								
 Rated operational currents I_e (at 60 °C) 								
- 1 conducting path	Up to 24 V 60 V 110 V 220 V 440 V 600 V	A A A A A	35 20 4.5 1 0.4 0.25					
- 2 conducting paths in series	Up to 24 V 60 V 110 V 220 V 440 V	A A A A	35 35 35 5					
- 3 conducting paths in series	600 V Up to 24 V 60 V 110 V 220 V 440 V 600 V	A A A A A	0.8 35 35 35 35 2.9 1.4					
Utilization category DC-3/DC-5,	000 V	^	1.4					
shunt-wound and series-wound motors ($L/R \le 15$)	ms)							
 Rated operational currents I_e (at 60 °C) 								
- 1 conducting path	Up to 24 V 60 V 110 V	A A A	20 5 2.5					
	220 V 440 V 600 V	A A A	1 0.09 0.06					
- 2 conducting paths in series	Up to 24 V 60 V 110 V	A A A	35 35 15					
	220 V 440 V 600 V	A A A	3 0.27 0.16					
- 3 conducting paths in series	Up to 24 V 60 V 110 V	A A A	35 35 35					
	220 V 440 V 600 V	A A A	10 0.6 0.6					
Switching frequency								
Switching frequency z in operating cycles/hour								
Contactors without overload relays								
No-load switching frequency	AC DC	h ⁻¹ h ⁻¹	5 000 1 500					
• Switching frequency z during rated operation ¹⁾								
- I _e /AC-1 - I _e /AC-2 - I _e /AC-3 - I _e /AC-4	At 400 V At 400 V At 400 V At 400 V	h ⁻¹ h ⁻¹ h ⁻¹ h ⁻¹	1 000 1 000 1 000 300			750 750 250		
Contactors with overload relays								
Mean value Dependence of the switching frequency Z		h ⁻¹	15					

¹⁾ Dependence of the switching frequency z' on the operational current I' and operational voltage U': $z' = z \times (I_0/I') \times (400 \text{ V/U'})^{1.5} \times 1/\text{h}$

Type Size		3RT2023 S0	3RT2024 S0	3RT2025 S0	3RT2026 S0	3RT2027 S0	3RT2028 S0
Conductor cross-sections (1 or 2 conductors connectable)		30		30	00	00	00
Main conductors		Screw	terminals				
Solid or stranded	mm²	2 x (1 2.5)) ¹⁾ , 2 x (2.5	10) ¹⁾			
• Finely stranded with end sleeves (DIN 46228-1)	mm ²	2 x (1 2.5))		
AWG cables, solid or stranded	AWG	2 x (16 12					
Terminal screws Tightening torque	Nm	M4 (for Pozi 2 2.5 (18		Ø 5 6)			
Auxiliary conductors							
Solid or stranded	mm ²	2 x (0.5 1			2 x 4		
 Finely stranded with end sleeves (DIN 46228-1) 	mm ²	2 x (0.5 1					
• Solid or stranded AWG (2 x)	AWG	2 x (20 16	6) ¹⁾ ; 2 x (18	14) ¹⁾ ; 2 x ⁻	12		
Terminal screws Tightening torque	Nm	M3 (for Pozi 0.8 1.2 (7	10.3 lb.ir	n)			
Main conductors ²⁾		Spring	j-type termi	nals			
• Operating devices ³⁾	mm	3.0 x 0.5					
Solid or stranded	mm ²	2 x (1 10)					
• Finely stranded with end sleeves (DIN 46228-1)	mm ²	2 x (1 6)					
Finely stranded without end sleeve	mm ²	2 x (1 6)					
AWG cables, solid or stranded	AWG	2 x (18 8)					
Auxiliary conductors ²⁾		,					
• Operating devices ³⁾		3.0 x 0.5					
Solid or stranded	mm^2	2 x (0.5 2	.5)				
• Finely stranded with end sleeves (DIN 46228-1)	mm ²	2 x (0.5 1	.5)				
Finely stranded without end sleeve	mm^2	2 x (0.5 2	.5)				
AWG cables, solid or stranded	AWG	2 x (20 14	1)				
Main conductors		Ring to	erminal lug	connection	s		
Terminal screw	mm	M4, Pozidriv	size 2				
Operating devices	mm	Ø 5 6					
Tightening torque	Nm	2 2.5					
• Usable ring terminal lugs	mm	$d_2 = \min. 4.3$	3				
- DIN 46234 without insulation sleeve - DIN 46235 without insulation sleeve - DIN 46237 with insulation sleeve - JIS C2805 Type R without insulation sleeve - JIS C2805 Type RAV with insulation sleeve - JIS C2805 Type RAP with insulation sleeve	mm	d ₃ = max. 1:	2.2				
Auxiliary conductors							
Terminal screw		M3, Pozidriv	size 2				
Operating devices	mm	Ø 5 6					
Tightening torque	Nm	0.8 1.2					
Usable ring terminal lugs	mm	$d_2 = min. 3.3$					
	mm	$d_3 = \text{max. 7}.$.5				

If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.
 Max. external diameter of the cable insulation: 3.6 mm.
 On spring-type terminals with conductor cross-sections ≤ 1 mm², an insulation stop must be used, see Accessories, page 3/76.

³⁾ Tool for opening the spring-type terminals; see "Accessories", page 3/76.



Туре			3RT2035	3RT2036	3RT2037	3RT2038
Size			S2	S2	S2	S2
Dimensions (W x H x D)		mm	55 x 114 x 1			
With mounted auxiliary switch block ¹⁾		mm		74 / 55 x 114 x 178		
With mounted function module ¹⁾	W N	mm		99 / 55 x 114 x 202		
General data						
Permissible mounting position						
The contactors are designed for operation on a			360° 2	00 E° 00 E° º		
vertical mounting surface.			300 2	22,5° 22,5° & \		
			(98		
				/ - ²		
Upright mounting position						
opright mounting position						
			NSB0_00477a			
Machanical andurance			Special vers	ion requirea		
Mechanical endurance Basic units	Operati	na ovolco	10 million			
Basic units Basic units with snap-on auxiliary switch block			10 million 10 million			
Solid-state compatible auxiliary switch block		ng cycles				
Electrical endurance	Ореган	rig cycles	2)			
Rated insulation voltage <i>U</i> _i (pollution degree 3)		V	690			
Rated impulse withstand voltage U_{imp}		kV	6			
Protective separation between the coil and the main of	ontacts	V	400			
(acc. to IEC 60947-1, Appendix N)	ontaots	•	400			
Mirror contacts						
A mirror contact is an auxiliary NC contact that cannot be simultaneously with an NO main contact.	oe closed					
Integrated auxiliary switches			Voc. acc. to	IEC 60947-4-1, Appe	ndiy E	
 3RT202., 3RT232. (removable auxiliary switch block) 				IEC 60947-4-1, Appe IEC 60947-4-1, Appe		
3RT202., 3RT232. (permanently mounted auxiliary sy				IEC 60947-4-1, Appe		
Permissible ambient temperature						
During operation		°C	-25 +60			
During storage		°C	-55 +80			
Degree of protection acc. to IEC 60947-1, Appendix C	;		IP20			
Connection range			IP00/open (v	vhere applicable, use	additional termina	al covers)
Touch protection acc. to EN 50274			Finger-safe			
Shock resistance rectangular pulse						
AC operation AC (DC or a protice)		<i>g</i> /ms	11.8/5 and 7			
AC/DC operation Check resistance size mules		<i>g</i> /ms	7.7/5 and 4.	5/10		
Shock resistance sine pulse		a/m. a	10 E/E and 1	1.0/10		
AC operationAC/DC operation		<i>g</i> /ms <i>g</i> /ms	18.5/5 and 1 12/5 and 7/1			
Conductor cross-sections		9,10	3)	-		
Short-circuit protection						
Main circuit			Short-circuit	protection for contact	tors with overload	relays
Fuse links, operational class qG:			See Configu	ration Manual "Config	juring SIRIUS Inno	vations" 4)
LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type	e 5SE			protection for fuseles 8, "Load Feeders an		or Use in the
according to IEC 60947-4-1/EN 60947-4-1			Control Cab	inet" → "SIRIUS 3RA2	Load Feeders"	
Type of coordination "1"Type of coordination "2"		A A	160 80	160 80	250 125	250 160
- Type of coordination 2 - Weld-free ⁵⁾		A	On request	00	120	100
Auxiliary circuit						
Fuse links, operational class gG:		Α	10			
DIAZED, type 5SB; NEOZED, type 5SE (weld-free protection $I_k \le 1$ kA)						
 Miniature circuit breakers 230 V, C characteristic 		Α	10			
(short-circuit current I_k < 400 A)		^	10			
" '						

- $^{1)}\,$ Dimensions for devices with screw terminals / spring-type terminals.
- For contact endurance of the main contacts, see page 3/17.
 For conductor cross-sections, see page 3/28.
- 4) See http://support.automation.siemens.com/WW/view/en/39714188
- 5) Test conditions according to IEC 60947-4-1.

Туре		3RT203A.0.	3RT203A.2.	3RT203A.6.	3RT203N.3
Size		S2	S2	S2	S2
Control					
Type of operating mechanism		AC			AC/DC
Solenoid coil operating range					
AC operation, 50 Hz		$0.8 \dots 1.1 \times U_{\rm S}$	0.8 1.1 x <i>U</i> _s	0.8 1.1 x <i>U</i> _s	0.8 1.1 x <i>U</i> _s
AC operation, 60 Hz			0.85 1.1 x <i>U</i> _s	0.8 1.1 x <i>U</i> _s	0.8 1.1 x <i>U</i> _s
DC operation					0.8 1.1 x <i>U</i> _s
Power consumption of the solenoid coils (for cold coil and 1.0 x $U_{\rm S}$)					
 AC operation, 50 Hz, standard version 					
- Closing - P.f.	VA	190 0.72			
- Closed	VA	16			
- P.f.		0.37			
 AC operation, 50/60 Hz, standard version 					
- Closing - P.f.	VA		210/188 0.69/0.65		
- Closed	VA		17.2/16.5		
- P.f.			0.36/0.39		
 AC operation, 50/60 Hz, for USA/Canada 					
- Closing - P.f.	VA			212/188 0.67/0.65	
- Closed	VA			18.516.5	
- P.f.				0.37/0.39	
AC/DC operation					
 Closing for AC operation P.f. 	VA				40 0.64/0.5
- Closed for AC operation	VA				2
- P.f.					0.36/0.39
 Closing for DC operation Closed for DC operation 	W				23 1
Permissible residual current of the electronics (with 0 signal)	VV				ı
AC operation	mA	<20			
• DC operation	mA	<20			
Operating times for 0.8 1.1 x $U_s^{(1)}$					
Total break time = Opening delay + Arcing time					
AC operation					
- Closing delay	ms	10 80			45 70
- Opening delay	ms	10 18			35 55
• DC operation					45 00
- Closing delay - Opening delay	ms ms				45 60 35 55
Arcing time	ms	10 20			10 20
Operating times for 1.0 x $U_s^{(1)}$	-				
AC operation					
- Closing delay	ms	1222			50 60
- Opening delay	ms	1018			40 50
DC operation					
- Closing delay	ms ms				45 55 40 50
- Opening delay	1115				40 30

¹⁾ The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (varistor +2 ms to 5 ms, diode assembly: 2 to 6 times).



T			aptoos.	aprosac	2DT0027	2072020
Type			3RT2035	3RT2036	3RT2037	3RT2038
Size Main circuit			S2	S2	S2	S2
Load rating with AC						
Utilization category AC-1, switching resistive loads						
Rated operational current I _e	At 40 °C up to 690 V At 60 °C up to 690 V	A A	60 55	70 60	80 70	90 80
• Rated power for AC loads ¹⁾ P.f. = 0.95 (at 60 °C)	230 V 400 V 690 V	kW kW kW	23 39 68	26 46 79	30 53 91	34 59 102
 Minimum conductor cross-section for loads with I_e 	At 40 °C At 60 °C	mm ² mm ²	16 16	25 16	25 25	35 25
Utilization categories AC-2 and AC-3						
$ullet$ Rated operational currents I_{e}	Up to 400 V 440 V 500 V 690 V	A A A	40 40 40 24	50 50 50 24	65 65 65 47	80 80 80 58
 Rated power for slipring or squirrel-cage motors at 50 and 60 Hz 	At 230 V 400 V 690 V	kW kW kW	11 18.5 22	15 22 22	18.5 30 37	22 37 45
Thermal load capacity	10 s current ²⁾	Α	400	420	520	640
Power loss per conducting path	At I _e /AC-3	W	2.2	4	3.8	5.7
Utilization category AC-4 (for $I_a = 6 \times I_e$)						
Maximum values:						
- Rated operational current $I_{\rm e}$	Up to 400 V	Α	35	41	55	55
 Rated power for squirrel-cage motors with 50 Hz and 60 Hz 	At 400 V	kW	18.5	22	30	30
• The following applies to a contact endurar of about 200 000 operating cycles:	nce					
- Rated operational currents I_{e}	Up to 400 V 690 V	A A	22 18.5	24 20	28 22	30 24
- Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 110 V 230 V 400 V 690 V	kW kW kW kW	3.2 6.7 11.6 16.8	3.5 7.3 12.6 18.2	4.1 8.5 14.7 20	4.3 9.1 15.8 21.8

¹⁾ Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).

According to IEC 60947-4-1.
 Rated values for various start-up conditions, see Chapter 7, "Protection Equipment" → "Overload Relays".

Туре			3RT2035	3RT2036	3RT2037	3RT2038
Size			S2	S2	S2	S2
Main circuit				-	0 -2	V-
Load rating with DC			•			
Utilization category DC-1, switching resistive loads (<i>L/R</i> ≤ 1 ms)						
• Rated operational currents I _e (at 60 °C)						
- 1 conducting path	Up to 24 V 60 V 110 V 220 V 440 V 600 V	A A A A A	55 23 4.5 1 0.4 0.25			
- 2 conducting paths in series	Up to 24 V 60 V 110 V 220 V 440 V 600 V	A A A A A	55 45 25 5 1 0.8			
- 3 conducting paths in series	Up to 24 V 60 V 110 V 220 V 440 V	A A A A	55 55 55 45 2.9			
Utilization category DC-3/DC-5,	600 V	А	1.4			
shunt-wound and series-wound motors ($L/R \le 1$)	5 ms)					
 Rated operational currents I_e (at 60 °C) 						
- 1 conducting path	Up to 24 V 60 V 110 V	A A A	35 6 2.5			
	220 V 440 V 600 V	A A A	2 0.1 0.06			
- 2 conducting paths in series	Up to 24 V 60 V 110 V	A A A	55 45 25			
	220 V 440 V 600 V	A A A	5 0.27 0.16			
- 3 conducting paths in series	Up to 24 V 60 V 110 V	A A A	55 55 55			
	220 V 440 V 600 V	A A A	25 0.6 0.35			
Switching frequency						
Switching frequency z in operating cycles/hour						
Contactors without overload relays	4.0	L-1	F 000			
No-load switching frequency	AC AC/DC	h ⁻¹ h ⁻¹	5 000 1 500			
• Switching frequency z during rated operation ¹⁾						
- I _o /AC-1 - I _o /AC-2 - I _o /AC-3 - I _o /AC-4	At 400 V At 400 V At 400 V At 400 V	h ⁻¹ h ⁻¹ h ⁻¹ h ⁻¹	1 200 750 1 000 300	1 000 600 800 250	800 400 700 200	700 350 500 150
Contactors with overload relays						
Mean value		h ⁻¹	15			
1)						

¹⁾ Dependence of the switching frequency z' on the operational current I' and operational voltage U': $z' = z \times (I_e/I') \times (400 \text{ V/U'})^{1.5} \times 1/\text{h}$



SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

Туре		3RT2035	3RT2036	3RT2037	3RT2038
Size		S2	S2	S2	S2
Conductor cross-sections (1 or 2 conductors connectable)					
Main conductors		Screw termi	nals		
Solid or stranded	mm²	2 x (1 35) ¹⁾ ; 1 x	(1 50) ¹⁾		
Finely stranded with end sleeve	mm²	2 x (1 25) ¹⁾ ; 1 x	(1 35) ¹⁾		
AWG cables, solid or stranded	AWG	2 x (18 2) ¹⁾ ; 1 x	(18 1) ¹⁾		
Terminal screwsTightening torque	Nm	Pozidriv size 2; Ø 3 4.5 (27 40			
Auxiliary and control conductors					
Solid or stranded	mm^2	2 x (0.5 1.5) ¹⁾ ; 2	2 x (0.75 2.5) ¹⁾		
Finely stranded with end sleeve	mm^2	2 x (0.5 1.5) ¹⁾ ; 2	2 x (0.75 2.5) ¹⁾		
• Solid or stranded AWG (2 x)	AWG	2 x (20 16) ¹⁾ ; 2	x (18 14) ¹⁾		
Terminal screws Tightening torque	Nm	M3 (for Pozidriv si 0.8 1.2 (7 10			
Auxiliary and control conductors ²⁾		Spring-type	terminals		
Operating devices ³⁾	mm	3.0 x 0.5			
Solid or stranded	mm^2	2 x (0.5 2.5)			
Finely stranded with end sleeve	mm^2	2 x (0.5 1.5)			
Finely stranded without end sleeve	mm^2	2 x (0.5 2.5)			
AWG cables, solid or stranded	AWG	2 x (20 14)			
 If two different conductor cross-sections are connected to one clampir point, both cross-sections must lie in one of the ranges specified. Max. external diameter of the cable insulation: 3.6 mm. On spring-type terminals with conductor cross-sections ≤ 1 mm², an insulation stop must be used, see Accessories, page 3/76. 	ng				

Data for North America

3) Tool for opening the spring-type terminals; see "Accessories", page 3/76.

Туре		3RT2015	3RT2016	3RT2017	3RT2018
Size		S00	S00	S00	S00
⊕ and ⊕ rated data					
Rated insulation voltage	V AC	600			
Uninterrupted current, at 40 °C, open and enclosed	А	20			
Maximum horsepower ratings (from 3 and 4 approved values)					
Rated power for three-phase motors at 60 Hz	At 200 V hp 230 V hp 460 V hp 575 V hp	1.5 2 3 5	2 3 5 7.5	3 3 7.5 10	3 5 10 10
Short-circuit protection ¹⁾ (contactor or overload relay)	At 600 V kA	5			
• Fuse CLASS J ²⁾	Α	40			
Circuit breakers with overload protection acc. to UL 489	А	50			
Combination motor controllers type E according to UL 508 and UL 60947-4-1		Values on r	request.		
Overload relays					
• Type		3RU211	/ 3RB301		
Setting range	А	0.11 16	/ 0.1 16		

¹⁾ For more information about short-circuit values, e.g. for protection against short-circuit currents, see the UL reports on the individual devices, www.siemens.com/sirius/manuals.

For the dimensioning of load feeders, see also the Configuration Manual "Configuring SIRIUS Innovations for UL", http://support.automation.siemens.com/WW/view/en/53433538.

²⁾ Values for RK5 fuses on request.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

Type		3RT2023	3RT2024	3RT2025	3RT2026	3RT2027	3RT2028
Size		S0	S0	S0	S0	S0	S0
® and ® rated data							
Rated insulation voltage	V AC	600				600	
Uninterrupted current, at 40 °C, open and enclosed	А	35				42	
Maximum horsepower ratings (from 3 and 9 approved values)							
Rated power for three-phase motors at 60 Hz	At 200 V hp 230 V hp 460 V hp 575 V hp	2 3 5 7.5	3 3 7.5 10	3 5 10 15	5 7.5 15 20	10 10 20 25	10 10 25 25
Short-circuit protection ¹⁾ (contactor or overload relay)	At 600 V kA	5					
• Fuse CLASS J ²⁾	А	125				150	
 Circuit breakers with overload protection acc. to UL 489 	А	70				100	
Combination motor controllers type E according to UL 508 and UL 60947-4-1	At 480 V Type	3RV202 Values on r	request.				
	At 600 V Type	3RV202 Values on r	request.				
Overload relays							
• Type		3RU212	/ 3RB302				
Setting range	Α	1.8 40	/ 0.1 40				

¹⁾ For more information about short-circuit values, e.g. for protection against short-circuit currents, see the UL reports on the individual devices, www.siemens.com/sirius/manuals.

For the dimensioning of load feeders, see also the Configuration Manual "Configuring SIRIUS Innovations for UL", http://support.automation.siemens.com/WW/view/en/53433538.

Type			3RT2035	3RT2036	3RT2037	3RT2038
Size			S2	S2	S2	S2
® and ® rated data						
Rated insulation voltage		V AC	600			
Uninterrupted current, at 40 °C, open and enclosed		А	55	60	80	90
Maximum horsepower ratings (from 3 and 4 approved values)						
Rated power for three-phase motors at 60 Hz	At 200/208 V 230/240 V 460/480 V 575/600 V	hp hp	10 15 30 40	15 15 40 50	20 20 50 50	20 25 50 60
Short-circuit protection ¹⁾ (contactor or overload relay)	At 600 V	kA	5	10	10	10
RK5 fuseCircuit breakers with overload protection acc. to UL 489		Α	150	200	250	250
·	At 480 V	Type	3RV1742			
		A kA	50 Values on r	50 equest.	60	70
	At 600 V	Type A kA	3RV1742 40 Values on r	50 equest.	50	60
Overload relays			Thermal / e	lectronic		
TypeSetting range		Α	3RU213 / 3 11 80 / 1			

¹⁾ For more information about short-circuit values, e.g. for protection against short-circuit currents, see the UL reports on the individual devices, www.siemens.com/sirius/manuals.

For the dimensioning of load feeders, see also the Configuration Manual "Configuring SIRIUS Innovations for UL", http://support.automation.siemens.com/WW/view/en/53433538.

Туре		3RT201	3RT202, 3RT203	
Size		S00	S0, S2	
		Integrated or mountable auxiliary switch block	Integrated	Mountable auxiliary switch block
® and ® rated data of the auxiliary contacts				
Rated voltage	V AC	600	600	600
Switching capacity		A 600, Q 600	A 600, P 600	A 600, Q 600
Uninterrupted current	At 240 V AC A	10	10	10

²⁾ Values for RK5 fuses on request.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

Selection and ordering data

AC operation

 $\begin{array}{ll} PU \text{ (UNIT, SET, M)} = 1 \\ PS^* & = 1 \text{ unit} \\ PG & = 41B \end{array}$





3RT201.-1A.

11A	3RT201

Rated data AC-2 and A		AC-1.	Auxiliary contacts		supply voltage		Screw terminals	⊕ DT	Spring-type terminals	$\overset{\infty}{\square}$	
$T_{\rm u}$: Up to 6		T _u : 40 °C			<i>U</i> _s at 50/60 Hz		Configurator	₹€₹	Configurator	€€5	
Opera-	Rating ¹⁾ of	Opera-	Ident. No.	Versio	n				وميري		ميته
tional current I_e up to	three-phase motors at 50 Hz and	tional current <i>I</i> _e up to		\I	7			Article No.	Price per PU	Article No.	Price per PU
400 V	400 V	690 V		'	'						
Α	kW	Α		NO	NC	V AC					

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S00²⁾³⁾

	auxiliary contact 1 NO,		10			 With auxiliary contact 1 NC, Ident. No. 01 						
	A1(+) 1/L1 3/L2 5/L3)—A1)—A2	-44	8/L2 5/L3 21 				
7	3	18	10	1		24 110 230	> > >	3RT2015-1AB01 3RT2015-1AF01 3RT2015-1AP01	*	3RT2015-2AB01 3RT2015-2AF01 3RT2015-2AP01		
			01		1	24 110 230	* * *	3RT2015-1AB02 3RT2015-1AF02 3RT2015-1AP02	* * *	3RT2015-2AB02 3RT2015-2AF02 3RT2015-2AP02		
9	4	22	10	1		24 110 230	* *	3RT2016-1AB01 3RT2016-1AF01 3RT2016-1AP01	* * *	3RT2016-2AB01 3RT2016-2AF01 3RT2016-2AP01		
			01		1	24 110 230	>	3RT2016-1AB02 3RT2016-1AF02 3RT2016-1AP02	* * *	3RT2016-2AB02 3RT2016-2AF02 3RT2016-2AP02		
12	5.5	22	10	1		24 110 230	>	3RT2017-1AB01 3RT2017-1AF01 3RT2017-1AP01	* *	3RT2017-2AB01 3RT2017-2AF01 3RT2017-2AP01		
			01		1	24 110 230	>	3RT2017-1AB02 3RT2017-1AF02 3RT2017-1AP02	* * *	3RT2017-2AB02 3RT2017-2AF02 3RT2017-2AP02		
16	7.5	22	10	1		24 110 230	> > >	3RT2018-1AB01 3RT2018-1AF01 3RT2018-1AP01	* * *	3RT2018-2AB01 3RT2018-2AF01 3RT2018-2AP01		
			01		1	24 110 230	>	3RT2018-1AB02 3RT2018-1AF02 3RT2018-1AP02	A A	3RT2018-2AB02 3RT2018-2AF02 3RT2018-2AP02		

To ronline configurator, see www.siemens.com/sirius/configurators.

Other voltages according to page 3/50 on request.

For accessories, see page 3/59.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ The 3RT20 contactors are also available with ring terminal lug connection. Please contact your local Siemens representative for information about these special versions.

³⁾ For size S00: Coil operating range at 50 Hz: 0.8 ... $1.1 \times U_{\rm S}$, at 60 Hz: 0.85 ... $1.1 \times U_{\rm S}$.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

AC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B





3RT201.-1AP04-3MA0

3RT201.-2AP04-3MA0

	Rated data Au- AC-2 and AC-3, AC-1,			ontacts	Rated control supply voltage	DT	Screw terminals		Spring-type terminals	
$T_{\rm u}$: Up to 6		T _u : 40 °C			<i>U</i> _s at 50/60 Hz		Configurator	£	Configurator	£
Opera-	Rating ¹⁾ of	Opera-	Ident. No.	Version				بممم		22
	three-phase motors at 50 Hz and	tional current I _e up to		\			Article No.	Price per PU	Article No.	Price per PU
400 V	400 V	690 V		1 1						
Α	kW	А		NO NC	V AC					

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S00²⁾

With permanently mounted auxiliary switch block

\rightarrow	A1(+)	1/L1	3/L2 \	5/L3	13	21 •	31 • \	43	
	A2(-)		+	6		t^{-}	-		
7	:	3		1	8			22	2

7	3	18	22	2	2	230	В	3RT2015-1AP04-3MA0	В	3RT2015-2AP04-3MA0
9	4	22	22	2	2	230	В	3RT2016-1AP04-3MA0	В	3RT2016-2AP04-3MA0
12	5.5	22	22	2	2	230	В	3RT2017-1AP04-3MA0	В	3RT2017-2AP04-3MA0
16	7.5	22	22	2	2	230	•	3RT2018-1AP04-3MA0		3RT2018-2AP04-3MA0

With permanently mounted auxiliary switch block and varistor plugged onto the front side

7	3	18	22	2	2	230	В	3RT2015-1CP04-3MA0	В	3RT2015-2CP04-3MA0
9	4	22	22	2	2	230	В	3RT2016-1CP04-3MA0	В	3RT2016-2CP04-3MA0
12	5.5	22	22	2	2	230	В	3RT2017-1CP04-3MA0	В	3RT2017-2CP04-3MA0
16	7.5	22	22	2	2	230	В	3RT2018-1CP04-3MA0	В	3RT2018-2CP04-3MA0

To online configurator, see www.siemens.com/sirius/configurators.

For size S00: Coil operating range at 50 Hz: $0.8 \dots 1.1 \times U_{\rm S}$ at 60 Hz: $0.85 \dots 1.1 \times U_{\rm S}$

Other voltages according to page 3/50 on request.

For accessories, see page 3/59.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

AC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B





3RT202.-1A.00

3RT202.-2A.00

Rated data AC-2 and		AC-1.	Auxiliary contacts		supply voltage		Screw terminals	⊕ DT	Spring-type terminals	<u> </u>	
$T_{\rm u}$: Up to 6	0 °C	T _u : 40 °C				$U_{\rm s}$ at 50 Hz		Configurator	₹€₹	Configurator	₹ <u>`</u> }
Opera-	Rating ¹⁾ of	Opera-	Ident. No.	Version							<i>w</i>
tional current I _e up to	three-phase motors at 50 Hz and	tional current I_e up to		1 1	†			Article No.	Price per PU	Article No.	Price per PU
400 V	400 V	690 V									
Α	kW	Α		NO N	١C	V AC					

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S0²⁾

To online configurator, see www.siemens.com/sirius/configurators.

Other voltages according to page 3/50 on request.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ The 3RT20 contactors are also available with ring terminal lug connection. Please contact your local Siemens representative for information about these special versions.

Power Contactors for Switching Motors

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

AC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B





3RT2023-2AB04

3RT2023-2AP04

3RT2024-2AB04

3RT2024-2AF04 3RT2024-2AP04

3RT2025-2AB04

3RT2025-2AF04

3RT2025-2AP04

3RT2026-2AB04

3RT2026-2AF04

3RT2026-2AP04

3RT2027-2AB04

3RT2027-2AF04

3RT2027-2AP04

3RT2028-2AB04 3RT2028-2AF04

3RT2028-2AP04



Rated control supply voltage	DT	Screw terminals	(DT	Spring-type terminals	8
U _s at 50 Hz		Configurator	£		Configurator	€€}}
		Article No.	Price per PU		Article No.	Price per PU

Α

В

B Α

В

В

Α

В

В

В

R

В

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

AC-1,

T_u: 40 °C

current Ie

Opera-

tional

up to

690 V

Α

Auxiliary contacts

Ident. No. Version

NO

NC

Size S0²⁾

Rated data

Opera-

current I_e

tional

up to 400 V

Α

AC-2 and AC-3

T_u: Up to 60 °C

Rating¹⁾ of

400 V

kW

at 50 Hz and

three-phase motors

With mounted auxiliary switch block (removable)³⁾

			,				
\Box	5(-)	L3 13 21 31 43 					
9	4	40	22	2	2	24 230	B
12	5.5	40	22	2	2	24 110 230	B B ▶
17	7.5	40	22	2	2	24 110 230	B B ▶
25	11	40	22	2	2	24 110 230	B B ▶
32	15	50	22	2	2	24 110 230	B B ▶
38	18.5	50	22	2	2	24 110 230	B B ▶

For online configurator, see www.siemens.com/sirius/configurators.

Other voltages according to page 3/50 on request.

For accessories, see page 3/59. For spare parts, see page 3/77.

3RT2023-1AB04

3RT2023-1AP04

3RT2024-1AB04

3RT2024-1AF04 3RT2024-1AP04

3RT2025-1AB04

3RT2025-1AF04

3RT2025-1AP04

3RT2026-1AB04

3RT2026-1AF04

3RT2026-1AP04

3RT2027-1AB04

3RT2027-1AF04

3RT2027-1AP04

3RT2028-1AB04 3RT2028-1AF04

3RT2028-1AP04

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ The 3RT20 contactors are also available with ring terminal lug connection. Please contact your local Siemens representative for information about these special versions.

³⁾ Article number for the auxiliary switch block (removable): 3RH2911-. HA11

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

AC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B





3RT202.-1AL24-3MA0

3RT202.-2AL24-3MA0

	Rated data Auxiliary c AC-2 and AC-3, AC-1,		ontacts	Rated control	DT	Screw terminals		DT	Spring-type terminals	∞	
AC-2 and T_{u} : Up to 6		AC-1, <i>T</i> _u : 40 °C			supply voltage U _s at 50/60 Hz		Configurator	£05		Configurator	£0%
	Rating ¹⁾ of	Opera-	Ident. No.	Version				ميه			ميه
tional current I _e up to	three-phase motors at 50 Hz and	tional current I_e up to		\			Article No.	Price per PU		Article No.	Price per PU
400 V	400 V	690 V									
Α	kW	Α		NO NC	V AC						

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S0

With permanently mounted auxiliary switch block and varistor plugged into the front side²⁾

) July	A2(-)	3/L2 5/L3 13 	#-#-							
9	4	40	22	2	2	230	В	3RT2023-1CL24-3MA0	В	3RT2023-2CL24-3MA0
12	5.5	40	22	2	2	230	В	3RT2024-1CL24-3MA0	В	3RT2024-2CL24-3MA0
17	7.5	40	22	2	2	230	В	3RT2025-1CL24-3MA0	В	3RT2025-2CL24-3MA0
25	11	40	22	2	2	230	В	3RT2026-1CL24-3MA0	В	3RT2026-2CL24-3MA0
32	15	50	22	2	2	230	В	3RT2027-1CL24-3MA0	В	3RT2027-2CL24-3MA0
38	18.5	50	22	2	2	230	В	3RT2028-1CL24-3MA0	В	3RT2028-2CL24-3MA0

 $[\]ensuremath{\mathfrak{D}}$ For online configurator, see www.siemens.com/sirius/configurators.

Other voltages according to page 3/50 on request.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ Varistor is permanently mounted.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

AC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B











(3R1	Г203	33	4.00	

Rated data AC-2 and A		AC-1,	Auxiliary contacts		Rated control supply voltage	Screw terminals	⊕ DT	Spring-type terminals	$\stackrel{\circ}{\square}$
$T_{\rm u}$: Up to 6		T _u : 40 °C			U _s at 50 Hz	Configurator	£03	Configurator	£\$
Opera-	Rating ¹⁾ of	Opera-	Ident. No.	Version			~~		444
tional current I _e up to	three-phase motors at 50 Hz and	tional current <i>I</i> _e up to		\		Article No.	Price per PU	Article No.	Price per PU
400 V	400 V	690 V		' '					
Α	kW	Α		NO NC	V AC				

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S2 NEW

A1(+) A2(-)	D— AA(+) 1/L1 3/L2 5/L3 13 21 2 2 2 2 2 2 2 2									
40	18.5	60	11	1	1	110		3RT2035-1AB00 3RT2035-1AF00 3RT2035-1AP00	A B	3RT2035-3AB00 3RT2035-3AF00 3RT2035-3AP00
50	22	70	11	1	1	110		3RT2036-1AB00 3RT2036-1AF00 3RT2036-1AP00	B B ▶	3RT2036-3AB00 3RT2036-3AF00 3RT2036-3AP00
65	30	80	11	1	1	110		3RT2037-1AB00 3RT2037-1AF00 3RT2037-1AP00	B B ▶	3RT2037-3AB00 3RT2037-3AF00 3RT2037-3AP00
80	37	90	11	1	1	110		3RT2038-1AB00 3RT2038-1AF00 3RT2038-1AP00	B B ▶	3RT2038-3AB00 3RT2038-3AF00 3RT2038-3AP00

With mounted auxiliary switch block (removable)²⁾

For online configurator, see www.siemens.com/sirius/configurators.

Other voltages according to page 3/50 on request.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ Article number for the auxiliary switch block (removable): 3RH2911-. HA11.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

AC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B





DT Screw terminals

Configurator

Article No.



DT	Spring-type	∞
	terminals	ш
	Configurator	£033
	Article No.	Price per PU

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

AC-1, T_u: 40 °C

Opera-

current Ie

tional

up to

690 V

Α

Size S2 NEW

Rated data

Opera-

tional

400 V

AC-2 and AC-3,

T_u: Up to 60 °C

current I_e motors at up to 50 Hz and

400 V

kW

Rating¹⁾ of three-phase

With permanently mounted auxiliary switch block and varistor plugged into the front side²⁾

NO

NC

V AC

Auxiliary contacts

Ident. No. Version

)	A1(+) 1/L1	3/L2	5/L3	13	21	31	43
~U\	 	q 7	<u> </u>	<u> </u>	¥_	¥٤	ı
<u> </u>	Δ2(_)) '	Ι,	1	(('	١
	A2(-) _{2/T1}	4/T2	6/T3	14	22	32	44
40	18.5		60			22	
			00				

40	18.5	60	22	2	2	230	В	3RT2035-1CL24-3MA0	В	3RT2035-3CL24-3MA0
50	22	70	22	2	2	230	В	3RT2036-1CL24-3MA0	В	3RT2036-3CL24-3MA0
65	30	80	22	2	2	230	В	3RT2037-1CL24-3MA0	В	3RT2037-3CL24-3MA0
80	37	90	22	2	2	230	В	3RT2038-1CL24-3MA0	В	3RT2038-3CL24-3MA0

Rated control

supply voltage U_s at 50/60 Hz

 $\ensuremath{\mathfrak{D}}$ For online configurator, see www.siemens.com/sirius/configurators.

Other voltages according to page 3/50 on request.

per PU

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ Varistor is permanently mounted.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

DC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B





3D.	[201	1 11	\sim

3RT201.-2B...

	Rated data AC-2 and AC-3, AC-1,			ontacts	Rated control supply voltage DT	Screw terminals	(DΤ	Spring-type terminals □			
T _u : Up to 6 Opera-		T _u : 40 °C Opera-	Ident. No.	Version	n	$U_{\rm s}$		Configurator	£		Configurator	ĘŢ,
tional current I _e up to 400 V	three-phase motors at 50 Hz and	tional current I _e up to 690 V		\ I	<u> </u>			Article No.	Price per PU		Article No.	Price per PU
Α	kW	Α		NO	NC	V DC						

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S00²⁾

 With a 	auxiliary contact 1	1 NO, Ident. No. 1	0			 With auxiliary contact 1 NC, Ident. No. 01 							
- -	$A1(+)$ $\begin{bmatrix} 1/L1 & 3/L2 \\ - & - & - \end{bmatrix}$ $A2(-)$ $\begin{bmatrix} 2/T1 & 4/T2 \end{bmatrix}$	5/L3 13 \ 6/T3 14)—A1)—A2	-44	V/L2 5/L3 21 					
7	3	18	10	1		24 220	A	3RT2015-1BB41 3RT2015-1BM41	B	3RT2015-2BB41 3RT2015-2BM41			
			01		1	24 220	B	3RT2015-1BB42 3RT2015-1BM42	B	3RT2015-2BB42 3RT2015-2BM42			
9	4	22	10	1		24 220	► B	3RT2016-1BB41 3RT2016-1BM41	B	3RT2016-2BB41 3RT2016-2BM41			
			01		1	24 220	► B	3RT2016-1BB42 3RT2016-1BM42	B	3RT2016-2BB42 3RT2016-2BM42			
12	5.5	22	10	1		24 220	► B	3RT2017-1BB41 3RT2017-1BM41	B	3RT2017-2BB41 3RT2017-2BM41			
			01		1	24 220	B	3RT2017-1BB42 3RT2017-1BM42	B	3RT2017-2BB42 3RT2017-2BM42			
16	7.5	22	10	1		24 220	► B	3RT2018-1BB41 3RT2018-1BM41	B	3RT2018-2BB41 3RT2018-2BM41			
			01		1	24 220	B	3RT2018-1BB42 3RT2018-1BM42	B	3RT2018-2BB42 3RT2018-2BM42			

With integrated coil circuit (diode)

• With auxiliary contact 1 NO, Ident. No. 10

•	With	auxiliary	contact	1 NC,	Ident.	No. 0	1

7	3	18	10	1		24	▶	3RT2015-1FB41		3RT2015-2FB41
			01		1	24	▶	3RT2015-1FB42	•	3RT2015-2FB42
9	4	22	10	1		24	•	3RT2016-1FB41		3RT2016-2FB41
			01		1	24	▶	3RT2016-1FB42	•	3RT2016-2FB42
12	5.5	22	10	1		24	▶	3RT2017-1FB41	•	3RT2017-2FB41
			01		1	24	▶	3RT2017-1FB42	•	3RT2017-2FB42
16	7.5	22	10	1		24	•	3RT2018-1FB41		3RT2018-2FB41
			01		1	24		3RT2018-1FB42		3RT2018-2FB42

 $[\]ensuremath{\mathfrak{D}}$ For online configurator, see www.siemens.com/sirius/configurators.

Other voltages according to page 3/50 on request.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ The 3RT20 contactors are also available with ring terminal lug connection. Please contact your local Siemens representative for information about these special contactor versions with ring terminal lug connection.

per PU

Power Contactors for Switching Motors

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

DC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit = 41B







3RT201 -2RB4 -0CC0



3RT201 -1RB44-3MA0



3RT201.-2BB44-3MA0

Configurator

Article No.

DT Spring-type terminals

311120110040000			311120120040000					31112011DD44-3WA0			
Rated data			Auxiliary contacts			Rated control	DT	Screw terminals	(1)		
	C-2 and AC-3, AC-1,				supply voltage			<u> </u>			
$T_{\rm u}$: Up to 6	60 °C	<i>T</i> _u : 40 °C				$U_{\rm s}$		Configurator	£		
Opera-	Rating ¹⁾ of	Opera-	Ident. No.	Version	on				ممم		
tional current I_e up to	three-phase motors at 50 Hz and	tional current I_e up to		\	7			Article No.	Price per PU		
400 V	400 V	690 V		'	'						
Α	kW	Α		NO	NC	V DC					

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

With permanently mounted auxiliary switch block

A1(+)	J1/L1]3/L2	5/L3	13	21 ?	31 ? \	43
A2(-)	2/T1	4/T2	6/T3	14	22	32	44
7	2		- 1	Q			22

7	3	18	22	2	2	24	>	3RT2015-1BB44-3MA0	В	3RT2015-2BB44-3MA0
9	4	22	22	2	2	24	>	3RT2016-1BB44-3MA0	В	3RT2016-2BB44-3MA0
12	5.5	22	22	2	2	24	В	3RT2017-1BB44-3MA0	В	3RT2017-2BB44-3MA0
16	7.5	22	22	2	2	24	В	3RT2018-1BB44-3MA0	В	3RT2018-2BB44-3MA0

With permanently mounted auxiliary switch block and integrated coil circuit (diode)


	\1(+) 	1/L1	3/L2	5/L3	13	21 7 –	31 ∳ }	43	
) *	A2(-)	2/T1	4/T2	6/T3	14	22	32	44	
7	•			40			~~		

7	3	18	22	2	2	24	В	3RT2015-1FB44-3MA0	В	3RT2015-2FB44-3MA0
9	4	22	22	2	2	24	В	3RT2016-1FB44-3MA0	В	3RT2016-2FB44-3MA0
12	5.5	22	22	2	2	24	В	3RT2017-1FB44-3MA0	В	3RT2017-2FB44-3MA0
16	7.5	22	22	2	2	24	В	3RT2018-1FB44-3MA0	В	3RT2018-2FB44-3MA0

Contactor with voltage tap-off (only available with 24 V DC coils)

• With auxiliary contact 1 NO, Ident. No. 10
) A1(+) \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
) A2(-) _{2/T1} _{4/T2} _{6/T3} ₁₄

 With auxili 	ary contac	ct 1 NC, Ide	nt. No. 01
) A1(+)]1/L1]3/L	2 5/L3 21	



7	3	18 10 1		24		3RT2015-1BB41-0CC0	▶	3RT2015-2BB41-0CC0		
			01		1	24	•	3RT2015-1BB42-0CC0	Α	3RT2015-2BB42-0CC0
9	4	22	10	1		24		3RT2016-1BB41-0CC0	Α	3RT2016-2BB41-0CC0
			01		1	24	А	3RT2016-1BB42-0CC0	Α	3RT2016-2BB42-0CC0
12	5.5	22	10	1		24	А	3RT2017-1BB41-0CC0		3RT2017-2BB41-0CC0
			01		1	24	А	3RT2017-1BB42-0CC0	Α	3RT2017-2BB42-0CC0
16	7.5	22	10	1		24	А	3RT2018-1BB41-0CC0		3RT2018-2BB41-0CC0
			01		1	24	А	3RT2018-1BB42-0CC0	Α	3RT2018-2BB42-0CC0

 $[\]ensuremath{\mathfrak{D}}$ For online configurator, see www.siemens.com/sirius/configurators.

Other voltages according to page 3/50 on request.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

DC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit = 41B









3RT202.-1B.40

Rated data									
	AC-2 and A		AC-						
	$T_{\rm u}$: Up to 6	0 °C	T_{u} :						
	Opera-	Rating ¹⁾ of	Ор						
	tional	three-phase motors	tion						
	current I _e	at 50 Hz and	cur						
	up to		up '						

C-1, 40 °C oeranal rrent I_e to 690 V

Auxiliary contacts Rated control DT supply voltage Ident. No. Version NC V DC

3R12021B.44		
Screw terminals	+	DΊ
Configurator	£	
Article No.	Price per PU	

3RT202 -2B 44

	3N12UZ2D.44	
Т	Spring-type terminals	8
	Configurator	();
	Article No.	Price per PU

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S0²⁾

400 V

400 V

9	4	40	11	1	1	24	>	3RT2023-1BB40	▶	3RT2023-2BB40
12	5.5	40	11	1	1	24 220	B	3RT2024-1BB40 3RT2024-1BM40	► B	3RT2024-2BB40 3RT2024-2BM40
17	7.5	40	11	1	1	24 220	B	3RT2025-1BB40 3RT2025-1BM40	► B	3RT2025-2BB40 3RT2025-2BM40
25	11	40	11	1	1	24 220	▶ B	3RT2026-1BB40 3RT2026-1BM40	B	3RT2026-2BB40 3RT2026-2BM40
32	15	50	11	1	1	24 220	B	3RT2027-1BB40 3RT2027-1BM40	► B	3RT2027-2BB40 3RT2027-2BM40
38	18.5	50	11	1	1	24 220	▶ B	3RT2028-1BB40 3RT2028-1BM40	B	3RT2028-2BB40 3RT2028-2BM40

With coil circuit plugged in (diode assembly)

	12/11 14/12	10/13 114 122								
9	4	40	11	1	1	24	В	3RT2023-1FB40		3RT2023-2FB40
12	5.5	40	11	1	1	24	•	3RT2024-1FB40		3RT2024-2FB40
17	7.5	40	11	1	1	24	•	3RT2025-1FB40		3RT2025-2FB40
25	11	40	11	1	1	24	•	3RT2026-1FB40		3RT2026-2FB40
32	15	50	11	1	1	24	•	3RT2027-1FB40		3RT2027-2FB40
38	18.5	50	11	1	1	24		3RT2028-1FB40		3RT2028-2FB40

With mounted auxiliary switch block (removable)³⁾

1	12/11 14/12 16	6/13 114 122 132 144								
9	4	40	22	2	2	24	>	3RT2023-1BB44		3RT2023-2BB44
12	5.5	40	22	2	2	24	•	3RT2024-1BB44		3RT2024-2BB44
17	7.5	40	22	2	2	24	•	3RT2025-1BB44		3RT2025-2BB44
25	11	40	22	2	2	24	•	3RT2026-1BB44		3RT2026-2BB44
32	15	50	22	2	2	24	•	3RT2027-1BB44		3RT2027-2BB44
38	18.5	50	22	2	2	24		3RT2028-1BB44		3RT2028-2BB44

To online configurator, see www.siemens.com/sirius/configurators.

Other voltages according to page 3/50 on request.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ The 3RT20 contactors are also available with ring terminal lug connection. Please contact your local Siemens representative for information about these special versions.

 $^{^{\}rm 3)}$ Article number for the auxiliary switch block (removable): 3RH2911-.HA11.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

DC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B







3RT202.-2BB44-3MA0

Rated data AC-2 and AC-3, AC-1, Till to 60 °C Tild 10 °C			Auxiliary co	ontacts	Rated control supply voltage	DT	Screw terminals		Spring-type terminals	<u>~</u>
$T_{\rm u}$: Up to 6		T _u : 40 °C			$U_{\rm s}$		Configurator (C)		Configurator	£
	Rating ¹⁾ of	Opera-	Ident. No.	Version				200		بمحر
current Ie	three-phase motors at 50 Hz and	tional current I_e up to		\			Article No.	Price per PU	Article No.	Price per PU
400 V	400 V	690 V		' '						
Α	kW	Α		NO NC	V DC					

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S0

With permanently mounted auxiliary switch block and varistor plugged in $^{2)}$

) Juga	A1(+) 1/L1 3/L2 5/L3 13 21 31 43 A2(-) 2/T1 4/T2 6/T3 14 22 32 44													
12	5.5	40	22	2	2	24	В	3RT2024-1DB44-3MA0	X	3RT2024-2DB44-3MA0				
17	7.5	40	22	2	2	24	В	3RT2025-1DB44-3MA0	Χ	3RT2025-2DB44-3MA0				
25	11	40	22	2	2	24	В	3RT2026-1DB44-3MA0	Χ	3RT2026-2DB44-3MA0				
32	15	50	22	2	2	24	В	3RT2027-1DB44-3MA0	X	3RT2027-2DB44-3MA0				

With permanently mounted auxiliary switch block and diode assembly plugged in²⁾

	A1(+) 1/L1 3/L2 5/L3 13 21 31 43 A2(-) 2/T1 4/T2 6/T3 14 22 32 44												
9	4	40	11	1	1	24	В	3RT2023-1FB44-3MA0	В	3RT2023-2FB44-3MA0			
12	5.5	40	11	1	1	24	В	3RT2024-1FB44-3MA0	В	3RT2024-2FB44-3MA0			
17	7.5	40	11	1	1	24	В	3RT2025-1FB44-3MA0	В	3RT2025-2FB44-3MA0			
25	11	40	11	1	1	24	В	3RT2026-1FB44-3MA0	В	3RT2026-2FB44-3MA0			
32	15	50	11	1	1	24	В	3RT2027-1FB44-3MA0	В	3RT2027-2FB44-3MA0			
38	18.5	50	11	1	1	24	В	3RT2028-1FB44-3MA0	В	3RT2028-2FB44-3MA0			

For online configurator, see www.siemens.com/sirius/configurators.

1) Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ Varistor or diode assembly is permanently mounted.

Other voltages according to page 3/50 on request.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

Contactors with voltage tap-off (DC operation)

 $\begin{array}{ll} PU \text{ (UNIT, SET, M)} = 1 \\ PS^* & = 1 \text{ unit} \\ PG & = 41B \end{array}$







3RT202.-2BB40-0CC0

Rated data AC-2 and AC-3, AC-1,			Auxiliary c	ontacts	Rated control supply voltage	DT	Screw terminals	⊕ [Spring-typ terminals	e <u> </u>
	: Up to 60 °C T_u : 40 °C				$U_{\rm s}$		Configurator	₹ ` }}	Configurat	or 🚓
Opera-	Rating ¹⁾ of	Opera-	Ident. No.	Version				بهمر		J.V.C.
tional current I_e up to	three-phase motors at 50 Hz and	tional current I_e up to		\			Article No.	Price per PU	Article No.	Price per PU
400 V	400 V	690 V		' '						
Α	kW	А		NO NC	V DC					

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S0

Contactors with voltage tap-off

9	4	40	11	1	1	24	Α	3RT2023-1BB40-0CC0	Α	3RT2023-2BB40-0CC0
12	5.5	40	11	1	1	24	А	3RT2024-1BB40-0CC0	Α	3RT2024-2BB40-0CC0
17	7.5	40	11	1	1	24	А	3RT2025-1BB40-0CC0	Α	3RT2025-2BB40-0CC0
25	11	40	11	1	1	24	А	3RT2026-1BB40-0CC0	Α	3RT2026-2BB40-0CC0
32	15	50	11	1	1	24	А	3RT2027-1BB40-0CC0	Α	3RT2027-2BB40-0CC0
38	18.5	50	11	1	1	24	А	3RT2028-1BB40-0CC0	Α	3RT2028-2BB40-0CC0

 $[\]ensuremath{\mathfrak{D}}$ For online configurator, see www.siemens.com/sirius/configurators.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

AC/DC operation (50/60 Hz and DC)

- Extended operating range of solenoid coil 0.7 ... 1.3 x U_s
- Reduced power consumption when closing and in the closed state

 $\begin{array}{ll} PU \text{ (UNIT, SET, M)} = 1 \\ PS^* & = 1 \text{ unit} \\ PG & = 41B \end{array}$





3RT202.-1N.30

3RT202	22N.	3
3RT202	22N.	3

Rated data AC-2 and		AC-1.	Auxiliary co	ontact	s	Rated control supply voltage	DT	Screw terminals	⊕ D1	Spring-type terminals	<u></u>
$T_{\rm u}$: Up to 6		T _u : 40 °C				$U_{\rm s}^{(2)}$		Configurator	£03	Configurator	É
Opera-	Rating ¹⁾ of	Opera-	Ident. No.	Versi	on				57.75		57.5
tional current <i>I</i> _e up to	three-phase motors at 50 Hz and	tional current <i>I</i> _e up to		\	<u> </u>			Article No.	Price per PU	Article No.	Price per PU
400 V	400 V	690 V		'	'						
Α	kW	Α		NO	NC	V AC/DC					

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S0

With integrated coil circuit (varistor)

	A2(-) 2/T1 4/T	2 6/T3 14 22								
9	4	40	11	1	1	21 28 95 130 200 280 ³⁾	X X X	3RT2023-1NB30 3RT2023-1NF30 3RT2023-1NP30	X X X	3RT2023-2NB30 3RT2023-2NF30 3RT2023-2NP30
12	5.5	40	11	1	1	21 28 95 130 200 280 ³⁾	* * *	3RT2024-1NB30 3RT2024-1NF30 3RT2024-1NP30	B B	3RT2024-2NB30 3RT2024-2NF30 3RT2024-2NP30
17	7.5	40	11	1	1	21 28 95 130 200 280 ³⁾	* *	3RT2025-1NB30 3RT2025-1NF30 3RT2025-1NP30	B B	3RT2025-2NB30 3RT2025-2NF30 3RT2025-2NP30
25	11	40	11	1	1	21 28 95 130 200 280 ³⁾	* * *	3RT2026-1NB30 3RT2026-1NF30 3RT2026-1NP30	* * *	3RT2026-2NB30 3RT2026-2NF30 3RT2026-2NP30
32	15	50	11	1	1	21 28 95 130 200 280 ³⁾	* *	3RT2027-1NB30 3RT2027-1NF30 3RT2027-1NP30	B	3RT2027-2NB30 3RT2027-2NF30 3RT2027-2NP30
38	18.5	50	11	1	1	21 28 95 130 200 280 ³⁾	B B	3RT2028-1NB30 3RT2028-1NF30 3RT2028-1NP30	B B	3RT2028-2NB30 3RT2028-2NF30 3RT2028-2NP30

For online configurator, see www.siemens.com/sirius/configurators.

2) Coil operating range: 0.7 x $U_{\rm S\,min}$...1.3 x $U_{\rm S\,max}$.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

³⁾ The following applies to $U_{\rm s\,max}$ = 280 V: Upper limit =1.1 x $U_{\rm s\,max}$.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

AC/DC operation (50/60 Hz and DC)

- Extended operating range of solenoid coil 0.8 ... 1.1 x U_s
- Reduced power consumption when closing and in the closed state

PU (UNIT, SET, M) = 1 PS* = 1 unit = 41B









3RT203.-3N.30

Rated data	ì		Auxiliary c	ontac	ts	Rated control	 Screw terminals	(1)	DT	Spring-type	8
AC-2 and A		AC-1, T _u : 40 °C				supply voltage $U_s^{(2)}$	Configurator			terminals Configurator	
Opera-	Rating ¹⁾ of	Opera-	Ident. No.	Versi	on		Comigarator	ĘŢ.		Comigarator	₹ <u>`</u> ``
tional current I _e up to	three-phase motors at 50 Hz and	tional current <i>I</i> _e up to		\	7		Article No.	Price per PU		Article No.	Price per PU
400 V	400 V	690 V		'	'						
Α	kW	Α		NO	NC	V AC/DC					
Fan a ana	fining and analy		in a conta T	11 25	-						

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

With integrated coil circuit (varistor) A1(+) 1/L1 3/L2 5/L3 13 21

) <u> </u>	A2(-) 2/T1 4/T2	6/T3 14 22								
40	18.5	60	11	1	1	20 33 83 155 175 280	B B	3RT2035-1NB30 3RT2035-1NF30 3RT2035-1NP30	► B B	3RT2035-3NB30 3RT2035-3NF30 3RT2035-3NP30
50	22	70	11	1	1	20 33 83 155 175 280	► B B	3RT2036-1NB30 3RT2036-1NF30 3RT2036-1NP30	B B B	3RT2036-3NB30 3RT2036-3NF30 3RT2036-3NP30
65	30	80	11	1	1	20 33 83 155 175 280	► B B	3RT2037-1NB30 3RT2037-1NF30 3RT2037-1NP30	B B B	3RT2037-3NB30 3RT2037-3NF30 3RT2037-3NP30
80	37	90	11	1	1	20 33 83 155 175 280	B B	3RT2038-1NB30 3RT2038-1NF30 3RT2038-1NP30	B A	3RT2038-3NB30 3RT2038-3NF30 3RT2038-3NP30

With mounted auxiliary switch block (removable)3) and integrated coil circuit

	A1(+) 1/L1 3/L2 A2(-) 2/T1 4/T2	5/L3 13 21 31 2 6/T3 14 22 32	1						
40	18.5	60	22	2	2	20 33	•	3RT2035-1NB34	-
						83 155 175 280	B B	3RT2035-1NF34 3RT2035-1NP34	- -
50	22	70	22	2	2	20 33 83 155 175 280	B B	3RT2036-1NB34 3RT2036-1NF34 3RT2036-1NP34	- - -
65	30	80	22	2	2	20 33 83 155 175 280	B B	3RT2037-1NB34 3RT2037-1NF34 3RT2037-1NP34	- - -
80	37	90	22	2	2	20 33 83 155 175 280	► B B	3RT2038-1NB34 3RT2038-1NF34 3RT2038-1NP34	

To ronline configurator, see www.siemens.com/sirius/configurators.

 $^{^{\}rm 1)}$ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ Coil operating range: 0.8 x $U_{\rm s \ min}$...1.1 x $U_{\rm s \ max}$.

³⁾ Article number for the auxiliary switch block (removable): 3RH2911-.HA11.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

AC/DC operation (50/60 Hz and DC)

- Extended operating range of solenoid coil 0.8 ... 1.1 x U_s
- Reduced power consumption when closing and in the closed state

PU (UNIT, SET, M) = 1 PS* = 1 unit = 41B










3RT203.-1NB30-0CC0


3RT203.-3NB30-0CC0 Rated data

3RT203.-1N.34-3MA0


3RT203.-3N.34-3MA0

AC-2 and T_u : Up to 6	
Operational current I_e up to	Rating ¹⁾ of three-phase motors at 50 Hz and
400 V	400 V
Α	kW





Screw terminals	
Configurator	£03
Article No.	Price per PU



For screw fixing and snap-on mounting onto TH 35 standard

Size S2 NEW

With permanently mounted auxiliary switch block and integrated varistor $^{\!3)}$

	A1(+) 1/	L1 3/L2	5/L3	13	21	31	43	
70/J -	7-7-	-7 ₄ 7 ₄		!	! _	اد≱ا		
) <u>rv</u> _	A2(-) 2/	_{/T1} _{4/T2}	6/T3	14	22	32	44	
40	18.5		60			22		

40	18.5	60	22	2	2	20 33	В	3RT2035-1NB34-3MA0	В	3RT2035-3NB34-3MA0
50	22	70	22	2	2	20 33	Α	3RT2036-1NB34-3MA0	В	3RT2036-3NB34-3MA0
65	30	80	22	2	2	20 33		3RT2037-1NB34-3MA0	В	3RT2037-3NB34-3MA0
80	37	90	22	2	2	20 33	•	3RT2038-1NB34-3MA0	Α	3RT2038-3NB34-3MA0

Contactors with voltage tap-off



	_,									
40	18.5	60	11	1	1	20 33	Α	3RT2035-1NB30-0CC0	Α	3RT2035-3NB30-0CC0
50	22	70	11	1	1	20 33	Α	3RT2036-1NB30-0CC0	Α	3RT2036-3NB30-0CC0
65	30	80	11	1	1	20 33	Α	3RT2037-1NB30-0CC0	Α	3RT2037-3NB30-0CC0
80	37	90	11	1	1	20 33	Α	3RT2038-1NB30-0CC0	Α	3RT2038-3NB30-0CC0

- For online configurator, see www.siemens.com/sirius/configurators.
- 1) Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.
- $^{2)}$ Coil operating range: 0.8 x $U_{\rm S~min}$...1.1 x $U_{\rm S~max}$
- 3) Varistor is permanently mounted.

SIRIUS 3RT20 contactors, 3-pole, up to 37 kW

Options

Rated control supply voltages, possible on request (change of the 10th and 11th digits of the Article No.)

Rated control supply voltage $U_{\rm S}$	Contactor type	3RT201	3RT202	3RT203	3RT231, 3RT251	3RT232, 3RT252	3RT233, 3RT253
	Size	S00	S0	S2	S00	S0	S2
Sizes S00 to S2							
AC operation ¹⁾							
Solenoid coils for 50	Hz (exception: Size	S00: 50 and 60 Hz	⁽²⁾)				
24 V AC		В0	B0	В0	В0	В0	В0
42 V AC		D0	D0	D0	D0		
48 V AC 10 V AC		H0 F0	H0 F0	H0 F0	H0 F0	 F0	 F0
230 V AC		P0	P0	P0	P0	P0	P0
240 V AC		U0	U0	U0			
00 V AC		V0	V0	V0	V0	V0	V0
Solenoid coils for 50	and 60 Hz ² /						
24 V AC		B0	C2	C2	B0	C2	C2
12 V AC 18 V AC		D0 H0	D2 H2	D2 H2	D0 H0	D2 H2	D2 H2
110 V AC		FO	G2	G2	F0	G2	G2
220 V AC		N2	N2	N2	N2	N2	N2
230 V AC	ISA and Cd-3h	P0	L2	L2	P0	L2	L2
Solenoid coils (for U	•						
50 Hz	60 Hz	KC.	14.0	1/0	1/0	1/ 0	IV.O.
110 V AC 220 V AC	120 V AC 240 V AC	K6 P6	K6 P6	K6 P6	K6 P6	K6 P6	K6 P6
Solenoid coils (for J	apan)						
60/60 Hz ⁴⁾	60 Hz ⁵⁾						
00 V AC	110 V AC	G6	G6	G6	G6	G6	G6
200 V AC 200 V AC	220 V AC 440 V AC	N6 R6	N6 R6	N6 R6	N6 R6	N6 R6	N6 R6
OC operation ¹⁾				-			-
12 V DC		A4	A4		A4	A4	
24 V DC		B4	B4		B4	B4	
42 V DC 48 V DC		D4 W4	D4 W4		D4 W4	D4 W4	
60 V DC		E4	E4				
10 V DC		F4	F4		F4	F4	
125 V DC 220 V DC		G4 M4	G4 M4		G4 M4	G4 M4	
230 V DC		P4	P4		P4		
xamples							
AC operation	3RT2023-1A P0 0	Contactor with scr	ew terminals; with	solenoid coil for 50	Hz for rated control	supply voltage 230	V AC
	3RT2023-1A G2 0	Contactor with scr	ew terminals; with	solenoid coil for 50/	60 Hz for rated cont	rol supply voltage 1	10 V AC
C operation	3RT2025-2B B4 0	Contactor with spr	ing-type terminals;	for rated control su	pply voltage 24 V D	С	
•	3RT2025-2B G4 0	•			pply voltage 125 V I		
	0		anto a ::	D		ADTO 0 "	
Rated control supply oltage	Contactor type	-	3RT2. 2N	Rated control sup voltage	ply Contactor type	3RT2. 3N	
J _{s min} U _{s max} 6)	Size	S00	S0	<i>U</i> _{s min} <i>U</i> _{s max} ⁶⁾	Size	S2	
Sizes S00 to S2							
AC/DC operation	(50/60 Hz AC, DC)					
21 28 V AC/DC			B3	20 33 V AC/E	OC	B3	
95 130 V AC/DC)		F3	83 155 V AC/E	OC	F3	
200 280 V AC/DC ⁷⁾			P3	175 280 V AC/[P3	
For deviating coil vo	oltages and coil oper	ating ranges of siz	es S00 and S0,	4) Coil operating r		4411	
	1 V DC power supply to 264 V DC) can be			Size S00: Size S0:	at 50/60 Hz: 0.85 at 50 Hz: 0.8 1.		
	roducts for Specific			0.20 00.	at 60 Hz: 0.85 1		

(see Chapter 15, "Products for Specific Requirements" — "SITOP Power Supplies").

2) Coil operating range at 50 Hz: 0.8 ... 1.1 x U_s at 60 Hz: 0.85 ... 1.1 x U_s

3) Coil operating range Size S00: at 50 Hz: 0.85.... 1.1 x U_s at 60 Hz: 0.8 ... 1.1 x U_s Size S0: at 50 Hz and 60 Hz: 0.8 ... 1.1 x U_s

⁵⁾ Coil operating range at 60 Hz: 0.8 ...1.1 x U_s

⁶⁾ Coil operating range for S0: $0.7 \times U_{\rm S\,min} \dots 1.3 \times U_{\rm S\,max}$ Coil operating range for S2: $0.8 \times U_{\rm S\,min} \dots 1.1 \times U_{\rm S\,max}$

⁷⁾ The following applies to S0 and $U_{\rm S\,max}$ = 280 V: Upper limit =1.1 x $U_{\rm S\,max}$

General data

Overview

Auxiliary switches

See also pages 3/15 and 3/58.

Positively driven contacts (for contactor relays)

Definition according to IEC 60947-5-1, Appendix L:



Positively-driven contact elements are a combination of "n" NO contact and "m" NC contact which are designed in such a way that they cannot be closed simultaneously.

Mirror contacts (for power contactors)

Definition according to IEC 60947-4-1, Appendix F:



A mirror contact is an NC contact that cannot be closed simultaneously with an NO main contact.

Solid-state time-delay auxiliary switches

The 3RA28 solid-state delayed auxiliary switches which can be mounted onto the contactor are designed for applications in the range from 24 to 240 V AC/DC (wide voltage range). Both the electrical and mechanical connection are made by simple snapping on and locking.

The time-delay auxiliary switch is supplied with power directly by two plug-in contacts through the coil terminals of the contactor, in parallel with A./A2.

A protection circuit (varistor) is integrated in each module.

A sealable cover is available to protect against careless adjustment of the set times.

Note:

Mounting more auxiliary switches to the contactor is not permitted.

OFF-delay devices for contactors

AC and DC operation

IEC 60947, EN 60947

For screw fixing and snap-on mounting onto TH 35 standard mounting rails. The OFF-delay devices have screw terminals.

The OFF-delay device prevents a contactor from dropping out unintentionally when there is a short-time voltage dip or voltage failure. It supplies a downstream, DC-operated contactor with the necessary energy during a voltage dip, ensuring that the contactor does not trip. The 3RA2916 OFF-delay devices are specifically designed for operation with the 3RT contactors and 3RH contactor relays in the SIRIUS series.

The OFF-delay device operates without external voltage on a capacitive basis, and can be energized with either AC or DC (24 V version only for DC operation). Voltage matching, which is only necessary with AC operation, is performed using a rectifier bridge.

A contactor opens after a delay when the capacitors of the solenoid coil, built into the OFF-delay device, are switched in parallel. In the event of voltage failures, the capacitors are discharged via the solenoid coil and thereby delay the opening of the contactor.

If the command devices are upstream of the OFF-delay device in the circuit, the OFF-delay takes effect with every opening operation. If the opening operation is downstream of the OFF-delay device, an OFF-delay only applies in the event of failure of the mains voltage.

Operation

In the case of the versions for rated control supply voltages of 110 and 230 V, either AC voltage or DC voltage can be applied on the line side, whereas the variant for 24 V is designed for DC operation only.

A DC-operated contactor is connected to the output according to the input voltage that is applied.

The mean value of the OFF-delay is approximately 1.5 times the specified minimum time.

Additional load module

Size S00 for plugging onto the front of the contactors with and without auxiliary switch block.

The module is used for increasing the permissible residual current and for limiting the residual voltage. It ensures the safe opening of contactors with direct control via 230 V AC semiconductor outputs of SIMATIC controllers. It acts simultaneously as a surge suppressor.

Surge suppressors

- Without LED (also for spring-type terminals) Sizes S00 to S2
- With LED (also for spring-type terminals) Sizes S00 to S2

All 3RT2 contactors and 3RH2 contactor relays can be retrofitted with RC elements or varistors for damping opening surges in the coil. Diodes or diode assemblies (comprising noise suppression diodes and Zener diodes for short break times) can be used.

The surge suppressors are plugged onto the front of size S00 contactors. Space is provided for them next to a snap-on auxiliary switch block.

Varistors, RC elements or diode assemblies can be plugged onto the front of size S0 and S2 contactors.

Coupling contactors are supplied either without overvoltage damping or with a suppressor diode, varistor or diode connected as standard, according to the version.

Note:

The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assembly 2 to 6 times, varistor +2 to 5 ms).

Coupling links for control by PLC

IEC 60947 and EN 60947

The coupling links are suitable for use in any climate. They are finger-safe according to EN 50274. The terminal designations comply with EN 50005.

System-compatible operation with 24 V DC, operating range 17 to 30 V.

Low power consumption of 0.5 W in conformity with the technical specifications of the solid-state systems. An LED indicates the switching state.

Surge suppression

The 3RH2924-1GP11 coupling link has an integrated surge suppressor (varistor) for the contactor coil being switched.

Mounting

The 3RH2924-1GP11 coupling link is mounted on the contactor coil size S0 using a coil connection module.

Accessories for 3RT2 Contactors


General data

EMC suppression module, three-phase for size S00 contactors



EMC suppression modules

A so-called counter-e.m.f. (electromotive force) is produced when motors or various inductive loads are turned off. Voltage peaks of up to 4 000 V may occur as a result, with a frequency spectrum from 1 kHz to 10 MHz and a rate of voltage variation from 0.1 to 20 V/ns.

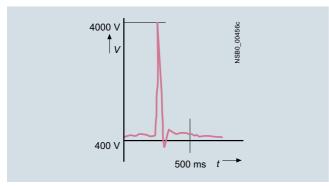

Voltage curve without suppression

Capacitive input to various analog and digital signals makes it necessary to suppress interference in the load circuit.

Reducing contact arcing

The connection between the main current path and the EMC suppression module enables contact arcing, which is responsible for contact erosion and the majority of clicking noises, to be reduced; this in turn is conducive to an electromagnetically compatible design.

Higher operational reliability


Since the EMC suppression module achieves a significant reduction in radio-frequency components and the voltage level in three phases, the contact endurance is also improved considerably. This makes an important contribution towards enhancing the reliability and availability of the system as a whole.

Dispensing with fine graduations

There is no need for fine graduations within each performance class, as smaller motors inherently have a higher inductance, so that one solution for all fixed-speed operating mechanisms up to 5.5 kW is adequate.


Two electrical versions are available:

 The advantages of the <u>RC circuit</u> lie mainly in the reduction in the rate of rise and in its <u>RF damping</u> ability. The selected values ensure effective interference suppression over a wide range.

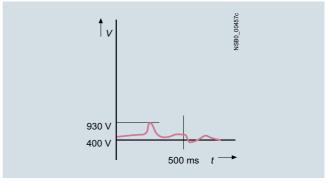

Voltage curve with RC circuit

 The <u>varistor circuit</u> can absorb a high energy level and can also be used for frequencies ranging from 10 to 400 Hz (closed-loop controlled operating mechanisms). There is no limiting below the knee-point voltage, however.

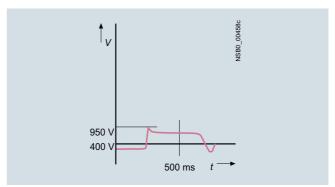

Voltage curve with varistor circuit

Sealable covers

When contactors and contactor relays are used in safety-related applications, it must be ensured that it is impossible to operate the contactors manually.

For SIRIUS contactors there are sealable covers available for this purpose as accessories; these prevent accidental manual operation. These are transparent molded-plastic caps with a bracket that enables the contactor to be sealed.

Solder pin adapters

The solder pin adapters for the contactors size S00, up to 5.5 kW or 12 A (AC-1/AC-3), are available in two versions:

- Solder pin adapter for contactors with one integrated auxiliary contact
- Solder pin adapter for contactors with mounted 4-pole auxiliary switch block



Accessories for 3RT2 Contactors

General data

Technical specifications

Time-delay auxiliary switches

Version	Type Function		3RA2813 ON-delay	3RA2814 OFF-delay with control signal	3RA2815 OFF-delay withou control signal
	Dimensions	S	1)	with control signal	control signal
General data		-			
Rated insulation voltage <i>U</i>_i Pollution degree 3 Overvoltage category III		V AC	300		
Rated impulse withstand voltage U _{imp}		kV AC	4		
Operating range of excitation			0.85 1.1 x <i>U</i> _s , 0.95 1.05 time	es the rated frequency	
Rated power		W	1		
 Power consumption at 230 V AC, 50 Hz 		VA	2		
Rated operational currents I_{e}			1		
• AC-15	At 24 250 V, 50 Hz	Α	3		
• DC-13	- At 24 V	Α	1		
	- At 125 V	Α	0.2		
01	- At 250 V	А	0.1		
Short-circuit protection • Fuse links, gG operational class: DIAZED, type 5SB		Α	4		
Switching frequency for load					
• With I _e at 230 V AC		h ⁻¹	2 500		
With 3RT2 contactor at 230 V AC		h ⁻¹	2 500		
Recovery time		ms	150		
Minimum ON period		ms		35	200
Residual current, max.		mA			
Voltage drop, max. with conducting output		VA			
Setting accuracy, typ. with reference to upper limit of scale			±15 %		
Repeat accuracy, max.			±1 %		
Electrical endurance at AC-15, 250 V, 3 A	· · · · · · · · · · · · · · · · · · ·	ng cycles			
Mechanical endurance	Operati	ng cycles	10 x 10°		
Permissible ambient temperature		۰۰	05 .00		
During operation		°C	-25 +60		
• During storage		°C	-40 +80		
Degree of protection acc. to IEC 60947-1, Ap Shock resistance Half-sine acc. to IEC 60068-2-27	репаіх С	g/ms	15/11		
Vibration resistance according to IEC 60068-2-6		Hz/mm	10 55/0.35		
Electromagnetic compatibility (EMC)			IEC 61000-6-2, II	EC 61000-6-4, IEC 61812-1, IE	EC 60947-4-1
Overvoltage protection			Varistor integrate	ed	
Permissible mounting position			Any (see contact	tor)	
Conductor cross-sections					
Connection type			Screw term	ninals	
• Solid		mm ²	1 x (0.5 4), 2 x	(0.5 2.5)	
 Finely stranded with end sleeve 		mm ²	1 x (0.5 2.5), 2	2 x (0.5 1.5)	
 AWG cables, solid or stranded 		AWG	2 x (20 14)		
Terminal screws			M3 (for standard	screw driver size 2 or Pozidri	v 2)
Tightening torque		Nm	0.8 1.2		
Connection type		6	Spring-typ	e terminals	
• Solid		mm ²	2 x (0.25 1.5)		
 Finely stranded with end sleeve 		mm ²	2 x (0.25 1.5)		
• Finely stranded		mm ²	2 x (0.25 1.5)		
AWG cables, solid or strandedOperating devices		AWG mm	2 x (24 16) 3.0 x 0.5		
. •					

 $^{^{\}rm 1)}$ Dimensions with mounted function module, see 3RT20 contactors, pages 3/19 and 3/24.

Accessories for 3RT2 Contactors

General data

Version	Type	3RT2916-2BE01	3RT2916-2BK01	3RT2916-2BL01
	Function	OFF-delay devices		
General data				
Connectable contactor sizes Caution! Only contactors and contactor relays with DC connected.	pperation can be			
• DC supply		S00/S0/S2	S00/S0/S2	S00/S0/S2
AC supply			S00/S0	S00/S0
	Type	3RT2011BB4., 3RT2021BB4., 3RT2031NB3., 3RH21BB40	3RT2011BF4., 3RT2021BF4., 3RT2031NF3., 3RH21BF40	3RT2011BM4./1BP4., 3RT2021BM4./1BP4., 3RT2031NP3., 3RH21BM40/1BP40
Permissible mounting position		360° 0.00688	360° 899000° 989	
Mechanical endurance	Operating cycles	30 million		
Endurance, electrical approx.	Operating cycles	>1 million		
Switching frequency z max. (at $T_u = 60 ^{\circ}\text{C}$)	h ⁻¹	300		
Permissible ambient temperature $T_{\rm u}$				
 During operation Side-by-side mounting without distance Side-by-side mounting with 5 mm distance 	°C °C	-25 +50 -25 +60		
During storage	°C	-40 +80		
Conductor cross-sections		2)		
$U_{\rm sp}$ = Coil voltage $T_{\rm sp}$ = Coil temperature				
Control				
Rated control supply voltage U_s Operating range	V	24 (DC) 0.9 1.1 <i>U</i> _s	110 (AC/DC)	220/230 (AC/DC)
Rated frequency f with AC supply	Hz ±5 %		50/60	50/60
OFF-delay ¹⁾				
(minimum times at $U_{\rm Sp}$ = 0.9 x $U_{\rm S}$, $T_{\rm Sp}$ = 20 °C)		Notes: In practice the mean v	value is 1.5 times the mir	nimum time.
• S00	$t_{\rm off} > {\rm ms}$	200	100	500
• S0	$t_{\rm off} > {\rm ms}$	100	80	300
• S2 (only for DC supply)	$t_{\rm off} > {\rm ms}$	100	250	800
ON-delay (maximum at $U_{\rm sp} = 0.9 \times U_{\rm s}$, $T_{\rm sp} = 20 ^{\circ}{\rm C}$)		Notes: The total ON-delay = 0	Contactor make-time + t	on
• S00	t_{on} < ms	10	60	200
• S0	$t_{\rm on} < {\rm ms}$	10	80	250
• S2 (only for DC supply)	$t_{on} > ms$	40	40	40
Installed capacity C 3RT1916-2B.01 Capacitor voltage	μF V	2 000 35	68 180	68 350
Power loss P _v max. approx.	W	0.4	0.5	1
Surge suppression	••	With varistor, integrate		
0		randton, mitograte		

Doubling the delay time can be achieved by doubling the capacitance. Commercially available capacitors can be used, which can be connected to terminals C+ and Z-.

²⁾ See 3RT201 contactors, page 3/19.

General data

Version	Туре		3RT2926-2P
	Function		Pneumatic delay block ¹⁾
General data			
Rated insulation voltage <i>U</i> _i (pollution degree 3)	V		690
Mechanical endurance	Operating c	ycles	5 million
Electrical endurance at I_e	Operating c	ycles	1 million
Permissible ambient temperature			
During operationDuring storage	℃		-25 +60 -50 +80
Rated operational currents I _e According to IEC 60947 utilization categories			
• AC-12	Α		10
• AC-15/AC-14 at <i>U</i> _e	Up to 230/220 V A 400/380 V A 500 V A 690/660 V A		6 4 2.5 1.5
• DC-13 at <i>U</i> _e	At 24 V A 48 V A 110 V A 220 V A 440 V A		4 2 0.7 0.3 0.15
$\begin{tabular}{ll} \textbf{Short-circuit test} \\ \textbf{with fuse links of operational class gG} \\ \textbf{with short-circuit current } \textit{I}_k = 1 \text{ kA according to IEC} \\ \end{tabular}$	A 60947-5-1		10
Time delay			
Accuracy			±10 %
Conductor cross-sections			
 Solid, stranded Finely stranded with end sleeve AWG cables Tightening torque of the terminal screws 	mr mr AV Nn	m² VG	2 x (0.5 1.5) ²⁾ or 2 x (0.75 2.5) ²⁾ 2 x (0.5 1.5) ²⁾ or 2 x (0.75 2.5) ²⁾ 2 x (20 16) ²⁾ or 2 x (18 14) ²⁾ 0.8 1.1
© and © rated data	INI		o.o 1.1
Rated voltage	V	AC.	600
Switching capacity	V 7		A 600, Q 600
 For sizes S0 and S2. In addition to the pneumatic delay block, no other permitted. 	auxiliary contacts are) If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

Version	Туре	3RT2926-3A
	Function	Mechanical latching block for 3RT2.2. contactors
General data		
Standards		IEC 61812-1
Rated insulation voltage <i>U</i> _i (pollution degree 3)	V	690
Mechanical endurance		
With contactor 3RT2.2.	Operating cycles	3 million
Permissible ambient temperature		
During operation	°C	-25 +60
During storage	°C	-50 +80
Degree of protection acc. to IEC 60947-1, Appendix C		IP20
Operating range of the solenoid coil At AC 50/60 Hz and DC		0.85 1.1 x <i>U</i> _S
Power consumption of the solenoid coils of the unlocking magnet (for cold coil and 1.0 \times $U_{\rm S}$) AC and DC operation	W	Approx. 4
Command duration for de-energizing		
AC operation	ms	18 31
DC operation	ms	18 26
Conductor cross-sections		
• Solid	mm ²	2 x (0.5 2.5); 1 x 4
 AWG cables, solid 	AWG	2 x 14; 1 x 12
Finely stranded with end sleeve	mm ²	2 x (0.5 2.5); 1 x 2.5
AWG cables, finely stranded with end sleeve	AWG	2 x 14; 1 x 12
Tightening torque of the terminal screws	Nm lb.in	0.8 1.1 7 9.5

Accessories for 3RT2 Contactors

General data

Version	Туре		3RT1900-4RE01	3RT1916-4RD01	3RT1926-4RD01
Connection modules for contactors with screw terminals			S00, S0 connectors	S00 adapters	S0 adapters
General data					
Rated insulation voltage <i>U</i>_i (pollution degree 3)		V	690		
Rated impulse withstand voltage <i>U</i> _{imp} (pollution degree 3)		kV	6		
Rated operational voltage U _e		V	440		
Rated frequency f For AC operation		Hz	50/60		
Rated operational current $I_{\mathbf{e}}$ AC-3 at 400 V		А	25	20	25
Mechanical endurance	Operatin	g cycles	10 million		
Electrical endurance at I _e	Operatin	g cycles	1 million		
Protective separation according to IEC 60947-1 (pollution degree 3)		V	400		
Permissible ambient temperature					
During operation		°C	-25 +60		
During storage		°C	-50 +80		
Degree of protection acc. to IEC 60529			IP20		
Conductor cross-sections					
Connection type			Screw terminals		
• Solid		mm^2	1 x (0.5 6)		
Finely stranded without/with end sleeve		mm^2	1 x (0.5 6)		
Stranded		mm^2	1 x (0.5 6)		
AWG cables, solid or stranded		AWG	1 x (20 10)		
Tightening torque		Nm	0.6 0.8		
Corresponding opening tool			Short-slot screwdriver P	Z2	
® and ℗ rated data					
Rated operational voltage $\emph{\textbf{U}}_{ m e}$		V	480		
Rated insulation voltage <i>U</i> i		V	600		
Uninterrupted current, at 40 °C		А	16/25	16	25
Short-circuit protection ¹⁾					
• At 600 V		kA	5		
CLASS RK5 fuse		Α	100	60	100
Circuit breakers with overload protection acc. to UL 489		Α	100	60	100
Combination motor controllers type E according to UL 5	08				
	At 480 V	Type	3RV202		
		A	22		22
		kA	65		65
	At 600 V	Type	3RV202		
		A	22		22
		kA	10		10

¹⁾ For more information about short-circuit values, e.g. for protection against short-circuit currents, see the UL reports on the individual devices, www.siemens.com/sirius/manuals.

For the dimensioning of load feeders, see Configuration Manual "Configuring SIRIUS Innovations for UL", http://support.automation.siemens.com/WW/view/en/53433538.



General data

Version	Туре	3RH2924-1GP11	3RH2914GP11
Coupling links		Coupling links for PLC	Coupling links for PLC
Mounting on contactors of size		S0	S00 to S2
General data			
Standards		IEC 60947	
Rated insulation voltage U_i (pollution degree 3)	V	300	
Protective separation between coil and contacts acc. to IEC 60947-1, Appendix N	V AC	Up to 300	
Degree of protection acc. to IEC 60947-1, Appendix C			
Connections		IP20	IP 20
Enclosure		IP40	IP 20
Permissible ambient temperature			
During operation	°C	-25 +60	
During storage	°C	-40 +80	
Control side			_
Rated control supply voltage U _s	V DC	24	
Operating range	V DC	17 30	
Power consumption at U _s	W	0.5	
Nominal current input	mA	20	
Release voltage	V	≥ 4	
Function display		Yellow LED	
Protection circuit		Varistor	
Load side			
Mechanical endurance	Operating cycles	20 million	10 million
Electrical endurance at I _e	Operating cycles	0.1 million	0.1 million
Switching frequency	h ⁻¹	5 000 operating cycles	
Make-time	ms	Approx. 7	
Break-time	ms	Approx. 4	
Bounce time	ms	Approx. 2	
Contact material		AgSnO ₂	
Switching voltage	V AC/DC	24 250	
Rated operational current I _e			
• AC-15/AC-14 at 230 V	Α	3	
• DC-13 at 230 V	А	0.1	
Permissible residual current of the electronics (with 0 signal)	mA	2.5	
Conductor cross-sections Connection type		Screw terminals	
• Solid	mm ²	2 x (0.5 2.5)	
Finely stranded with end sleeve	mm²	2 x (0.5 1.5)	
Terminal screws	111111	M3	
Connection type		Spring-type terminals	
•	2		0(0.05 4.5)
Solid Finally stranded with / without and along	mm ²		2 x (0.25 1.5)
Finely stranded with/without end sleeve ANYO call be a called an atread and	mm ²		2 x (0.25 1.5)
AWG cables, solid or stranded	AWG		2 x (24 16)
Operating devices	mm		3.0 x 0.5

Accessories for 3RT2 Contactors

General data

Options

Auxiliary switch: Terminal designations and identification numbers for auxiliary contacts

Terminal designations

The terminal designations are 2-digit, e.g. 13, 14, 21, 22:

- Tens digit: Sequence digit
 - Related terminals have the same sequence digit
- Units digit: Function digit
 - 1-2 for normally closed contacts (NC)
 - 3-4 for normally open contacts (NO)

Identification numbers

The identification number indicates the number and type of the auxiliary contacts, e.g. 40, 31, 22, 13:

- 1. digit: number of normally open contacts (NO)
- 2. digit: number of normally closed contacts (NC)

Examples:

- 31 = 3 NO + 1 NC
- 40 = 4 NO

Selection aid for mountable auxiliary switch blocks for power contactors and contactor relays

The auxiliary switch blocks of the 3RH29 series for mounting on the front and side can be used for power contactors as well as for contactor relays.

The possible combinations of basic unit and mounted auxiliary switch block can be found in the tables on pages 3/59 to 3/63.

Where the columns and lines intersect (blue and green in the example) you will find the identification number for the combination of basic unit (column) and auxiliary switch block (line).

Additional auxiliary	/ swi	tch b	locks	3-pole co	ontactors	
Article No.	Aux	iliary	contacts	3RT201	3RT201	3RT20.
	Vers	ion		S00	S00	S0/S2
	NO	NC		10	01	11
	\ \	<u> </u>		13	21	13 21
				2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.
				Accordin	ng to EN 5	0012 ¹⁾
Auxiliary switch	es w	ithou	ut NO contact			
3RH2911-□HA01		1	.1 -	11	02	12
3RH2911-□HA02		2	 .2 .1 .1	12	03	13
SKHZ911-LIHAUZ		۷	2 .2	12	03	13
3RH2911-□HA03		3	1 1 1 1	13	04	14
3RH2911-□FA04		4	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	14		
Auxiliary switch	with	1 1 N	O contact			•
3RH2911-□HA10	1		-\.3	20	11	21

1 For screw terminals
2 For spring-type terminals
Combinations according to EN 50012 EN 5001

.4

Example 1


Basic unit: 3-pole 3RT2017 motor contactor with 1 NO

Required: 1 NO + 4 NC (Ident. No. 14)
Result: 3RH2911-.FA04 auxiliary switch block

Example 2

Basic unit: 3-pole 3RT2023 motor contactor with 1 NO + 1 NC

Required: 1 NO + 4 NC (Ident. No. 14)
Result: Auxiliary switch block 3RH2911-.HA03

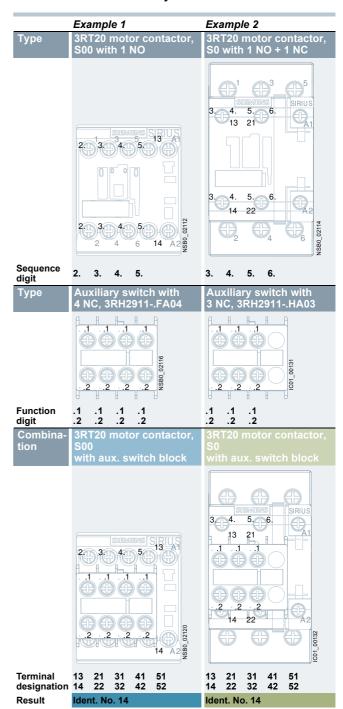

Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in bold print. All combinations comply with EN 50005.



Auxiliary switch blocks

Selection and ordering data

			-									
Additional auxilia				ontactors		-	ontactors			Contactor re	lays	
Article No.	Auxiliar	ry contacts	S00		S0/S2	S00		S0/S2		S00		
	Version	1	3RT201	3RT201	3RT20.	3RT231	3RT251	3RT23.	3RT25.	3RH21, 3RH2	24	
	NO NO		10	01	11			11	11	40E	31E	22E
			13	21 - -	13 21			13 21	13 21	13 23 33 43	13 21 33 43	13 21 31 43
	\		7	/ -	\ /			\ /	\ /	H-1-4-1	\ 	\
) (14	22	14 22			14 22	14 22	14 24 34 44	14 22 34 44	14 22 32 44
			2. 3. 4. 5.	5. 6. 7. 8.	3. 4. 5. 6.	1. 2. 3. 4.	1. 2. 3. 4.	3. 4. 5. 6.	3. 4. 5. 6.	5. 6. 7. 8	5. 6. 7. 8	5. 6. 7. 8
				ng to EN 5		Accordin				According to		
Front auxiliary	switch	ies										
Without NO co.			•									
3RH2911-□HA01		.1	11	02	12	01	01	12	12	41X	32X	23X
		/ _										
		.2										
3RH2911-□HA02	2	.1 .1	12	03	13	02	02	13		42E	33X	24
		<i>F</i> 7										
		l _{.2} l _{.2}										
3RH2911-□HA03	3	.1 .1 .1 2 2 2	13	04	14	03				43	34	
		F-7-7										
		.2 .2 .2										
3RH2911-□FA04	4	.1 .1 .1 .1 + + + +	14							44E		
		F-F-F-7										
		1.2 1.2 1.2 1.2										
With 1 NO con												
3RH2911-□HA10	1	.3	20	11	21	10	10	21	21	50E	41E	32E
		1.4										
3RH2911-□HA11	1 1	.1 . 1 .3	21	12	22	11	11	22	22	51X	42X	33X
		$\overline{}$										
3RH2911-□HA12	1 2	l.2 l.4	22	13	23	12	12	23		52	43	34
JKHZ911-UHA12	1 2	.1 .1 .3 	22	13	23	12	12	23		32	40	54
		(2 (2)4										
3RH2911-□HA13	1 3	.1 .1 .1 .3	23	14	24	13				53X	44X	
		<u> </u>										
		(.2 (.2 (.2).4										
With 2 NO com	tacts											
3RH2911-□HA20		.3 .3	30	21	31	20	20	31	31	60E	51X	42X
		F-1										
		_4 _4										
3RH2911-□HA21	2 1	.1 .3 .3	31	22	32	21	21	32	32	61	52	43
		*\-\										
		.2 .4 .4										
3RH2911-□HA22	2 2	1 1 3 3	32	23	33	22	22	33		62X	53	44X
		<i>}-</i> / -\-\										
		l.2 l.2 l.4 l.4										
3RH2911-□FA22	2 2	.3 .1 .1 .3	32	23	33	22	22	33		62X	53	44X
		\-\F-\F-\F-\Y										
		.4 .2 .2 .4										
With 3 NO cont												
3RH2911-□HA30	3	.3 .3 .3	40	31	41	30	30	41	41	70	61	52
		7-7-7										
0DU0044 514 54	0 1	1.4 1.4 1.4	44	00	40	0.1	0.1	40	10	747	cov	FOV
3RH2911-□HA31	3 1	[.1 .3 .3 .3 • \ 1 1 1 1 1 1 1 1 1	41	32	42	31	31	42	42	71X	62X	53X
		(-7-7-)										
14/44 4 110 -	44-	1.2 1.4 1.4 1.4										
With 4 NO cons			50	4.4	F-4	10	10	F-1	F-1	005	747	cov
3RH2911-□FA40	4	.3 .3 .3 .3	50	41	51	40	40	51	51	80E	71X	62X
		7-7-7-1										
		1.4 1.4 1.4 1.4										

¹⁾ Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in **bold print**. All combinations comply with EN 50005.

Accessories for 3RT2 Contactors

Additional auxili	ary s	switch	n blocks	3-pole co	ontactors		4-pole c	ontactors			Contactor re	lays	
Article No.			contacts	S00		S0/S2	S00		S0/S2		S00		
		rsion NC		3RT201 10	3RT201 01	3RT20. 11		3RT251	3RT23.	3RT25. 11	3RH21, 3RH2 40E	24 31E	22E
	140	INC						-					
	1	7		13 	21 7	13 21			13 21	13 21	13 23 33 43	13 21 33 43	13 21 31 43
		ı		14	22	14 22			14 22	14 22	14 24 34 44	14 22 34 44	14 22 32 44
				2. 3. 4. 5.	5. 6. 7. 8.		1. 2. 3. 4.	1. 2. 3. 4.				5. 6. 7. 8	5. 6. 7. 8
				Accordin	ng to EN 5	50005	Accordi	ng to EN 5	50005		According to	EN 50005	
Front auxiliary													
With make-bef	ore	-brea	k ¹⁾										
3RH2911-□FB11	1	1	.7 .5	21	12	22	11	11	22	22	51	42	33
			\										
3RH2911-□FB22		0	1.8 1.6	32	23	33	22	22	33		62	53	44
3KH2911-□FB22		2	.3 .1 .5 .7 #-#-	32	23	33	22	22	33		02	33	44
			4 (2 (6)8										
3RH2911-□FC22	2	2	.7 .7 .5 .5	32	23	33	22	22	33		62	53	44
			\-\-\-\-\-\-\-\-\-\-\-\-\-\-\-\-\-\-\-										
			.8 .8 .6 .6										
With complete	ins	cript	ion ²⁾										
3RH2911-1AA10	1		73	20	11	21	10	10	21	21	50	41	32
			-										
3RH2911-1BA10	4		₇₄ ₇₃	20	11	21	10	10	21	21	50	41	32
3KH2911-1BA10	ľ		1/3	20	11	21	10	10	21	21	30	41	32
			74										
3RH2911-1AA01		1	71	11	02	12	01	01	12	12	41	32	23
			/										
			72										
3RH2911-1BA01		1	71	11	02	12	01	01	12	12	41	32	23
			72										
3RH2911-1LA11	4	1	72 73 81	21	12	22	11	11	22	22	51	42	33
3KHZ911-ILA11	'	'	1/3 61	21	12	22	11	11	22	22	31	42	33
			74 82										
3RH2911-1MA11	1	1	73 81	21	12	22	11	11	22	22	51	42	33
			\\- -										
			74 82										
3RH2911-1LA20	2		73 83	30	21	31	20	20	31	31	60	51	42
			//										
2DU2044 4M422			74 84	20	01	0.1	20	20	0.1	0.1	60	F-1	40
3RH2911-1MA20	2		73 83	30	21	31	20	20	31	31	60	51	42
			74 84										

¹⁾ Contacts with make-before-break do not have a mirror contact function.

²⁾ Terminals from the top or bottom; see page 3/65.



Additional auxilia	rv switch	h blocks	3-nole c	ontactors		4-nole ce	ontactors			Contactor re	lave	
Article No.	_	contacts	S00	Unitacions	S0/S2	S00	Jillactors	S0/S2		S00	iays	
, in thorough	Version	Contacto	3RT201	3RT201	3RT20.	3RT231	3RT251	3RT23.	3RT25.	3RH21, 3RH2	24	
	NO NC		10	01	11			11	11	40E	31E	22E
	1 1		13		13 21			13 21		13 23 33 43		13 21 31 4
	\ \ \ \		7113	21 1	13 2			13 2	13 21	113 23 33 43	10 21 00 40	1.0 [2.10.1]
			14	22	14 22			14 22	14 22	14 24 34 44	14 22 34 44	14 22 32
				5. 6. 7. 8.		1231	1. 2. 3. 4.			5. 6. 7. 8	5. 6. 7. 8	5. 6. 7. 8
				ng to EN 5			ng to EN 5		0. 4. 0. 0.	According to		3. 0. 7. 0
Front auxiliary	switche	es					-g			January III		
With complete (for contactor i												
3RH2911-□GA40		53 63 73 83								80E		
		100 100 1.0 100								•••		
		54 64 74 84										
3RH2911-□GA31	3 1	53 61 73 83								71E		
		\ 										
		54 62 74 84										
3RH2911-□GA22	2 2	53 61 71 83								62E		
		\ 										
		54 62 72 84										
3RH2911-□GA13	1 3	53 61 71 81								53E		
		\ 										
3RH2911-□GA04	4	51 61 71 81								44E		
		7 7 7 7										
With complete special version		tion;										
3RH2911-□XA40		53 63 73 83	50	41	51	40	40	51	51	80E	71X	62X
-0MA0		1-1-1-1										
		54 64 74 84										
3RH2911-□XA31	3 1	53 61 73 83	41	32	42	31	31	42	42	71E	62X	53
-0MA0		\-\\frac{\frac{1}{2}}{2}										
		54 62 74 84										
3RH2911-□XA22	2 2	53 61 71 83	32	23	33	22	22	33		62E	53	44X
-0MA0		\\-\ \\ -\ \\ -\\\										
		54 62 72 84										
3RH2911-□XA04 -0MA0	4	51 61 71 81	14							44E		
-VIIIAU												
	~											
Solid-state con			10	02	10	02	00	10		40	22	24
3RH2911-□NF02	2	.1 .1	12	03	13	02	02	13		42	33	24
3RH2911-□NF11	1 1	.2 .2 .3 .1	21	12	22	11	11	22	22	51	42	33
JIMESTI-LINETT	' '	\	۷ ا	14	<i></i>			<i></i>	L L	01	4∠	33
		.4										
3RH2911-□NF20	2	.3 .3	30	21	31	20	20	31	31	60	51	42
	_	1.2	30		J.			J.		-0		
		.4										

Combinations according to EN 50011 and IEC 60947-5-1 are in **bold print**. All combinations comply with EN 50005.
 Ordering data, see Accessories for 3RH2 Contactor Relays, Chapter 5.

Accessories for 3RT2 Contactors

Additional auxilia	ry swit	ch blocks		3-pole co	ontactors		4-pole co	ontactors			Contactor re	lays	
Article No.		ry contacts		S00		S0/S2	S00		S0/S2		S00	•	
	Version			3RT201	3RT201	3RT20.		3RT251	3RT23.	3RT25.	3RH21, 3RH2		l
	NO N	U		10	01	11		-	11	11	40E	31E	22E
	\			13	21 	13 21			13 21	13 21	13 23 33 43	13 21 33 43	13 21 31 43
				14	22	14 22			14 22	14 22	14 24 34 44	14 22 34 44	14 22 32 44
					5. 6. 7. 8.		1. 2. 3. 4.	1. 2. 3. 4.			5. 6. 7. 8	5. 6. 7. 8	5. 6. 7. 8
				Accordin	ng to EN 5	50012 ¹⁾	Accordin	ng to EN 5	50012 ¹⁾		According to	EN 50011 ¹⁾	
Lateral auxiliar	y swit												
For size S00			Right				0.0	0.0					
3RH2911-□DA02	2		21 31	12			02	02					
			22 32										
3RH2911-□DA02	4		21 31	14									
		<i>}-</i>	<i>}-</i>										
		42 52	22 32										
3RH2911-□DA11	1 1		21 33	21			11	11					
			Γ										
3RH2911-□DA11	2 2		122 34	32			22	22					
SKHZ911-⊔DA11	2 2	41 53 2 \	21 33	32	_	_	<i>LL</i>	<i>LL</i>	_				-
		42 54	22 34										
3RH2911-□DA20	2		23 33	30			20	20					
		,	/										
			24 34										
3RH2911-□DA20	4	43 53	23 33	50			40	40					
		//.	/- +										
2DU2044 □DA20	2	144 154	24 34	44			31	31					
3RH2911-□DA20 +		43 53	21 33	41			31	31					
3RH2911-□DA11	1 1	44 54	22 34										
3RH2911-□DA20	2	43 53	21 31	32			22	22					
+ 3RH2911-□DA02	2	//	<i>‡-‡</i>										
		44 54	22 32										
3RH2911-□DA11 +	1 1	41 53	21 31	23			13						
3RH2911-□DA02	2	42 54	22 32										
For size S0/S2			Right										
3RH2921-□DA02	2		31 41	12	03	13	02	02	13				
			<i>}-</i>										
			32 42										
3RH2921-□DA02	4	51 61 *	31 41	14									
		[]	77										
3RH2921-□DA11	1 1	152 162	32 42 31 43	21	12	22	11	11	22	22			_
SKHZ9ZI-LIDATI	' '		£ \ 143	21	12	22	' '	11	22	22			
			32 44										
3RH2921-□DA11	2 2	51 63		32	23	33	22	22	33				
		£ 1	*\										
		l52 l64	32 44										
3RH2921-□DA20	2		33 43	30	21	31	20	20	31	31			
			34 44										
3RH2921-□DA20	4	53 163	34 44	50	41	51	40	40	51	51			
51111202 1-21DA20	,	/-/	/-/	50		01	10	10	51	J.			
		54 64	34 44										
1) Combinations as	٠												

¹⁾ Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in **bold print**. All combinations comply with EN 50005.



Additional auxilia	_		-	ontactors		4-pole c	ontactors			Contactor re	lays	
Article No.		y contacts	S00		S0/S2	S00		S0/S2	1	S00		
	Version		3RT201	3RT201	3RT20.		3RT251		3RT25.	3RH21, 3RH2		
	NO NO	;	10	01	11			11	11	40E	31E	22E
	\ \ \ \		13	21 - -	13 21			13 21	13 21	13 23 33 43	13 21 33 43	13 21 31 43
) (7	1	57			\/	\/	7-7-7		
			l ₁₄	l ₂₂	l14 l22			l14 l22	114 122	114 124 134 144		14 22 32 44
				5. 6. 7. 8.				3. 4. 5. 6.	3. 4. 5. 6.	5. 6. 7. 8	5. 6. 7. 8	5. 6. 7. 8
Lateral auxilia	ar ovrito	haa	Accordi	ng to EN 5	00012"	Accordi	ng to EN 5	00012"		According to	EN 50011"	
	y Switc											
For size S0/S2 3RH2921-□DA20	2	Left Right 153 163 131 143	41	32	42	31	31	42	42			
+	2	155 65 51 45	41	32	42	31	31	42	42			
3RH2921-□DA11	1 1	54 64 32 44										
3RH2921-□DA20	2	53 63 31 41	32	23	33	22	22	33				
+		__\\\	32	_5	30			30				
3RH2921-□DA02	2	54 64 32 42										
3RH2921-□DA11	1 1		23	14	24	13						
+		51 63 31 41										
3RH2921-□DA02	2	52 64 32 42										
For contactor	relavs	Left										
3RH2921-□DA02	_	51 61 2 2								42Z	33X	24
		<i>}-</i>										
		52 62										
3RH2921-□DA11	1 1	51 63								51X	42X	33X
		⋡ ∖¹										
		52 64										
3RH2921-□DA20	2	53 63								60Z	51X	42X
		//,										
		54 64										
Solid-state cor	npatible	9										
For size S00		Left Right										
3RH2911-2DE11	1 1	23 31	21			11	11					
		\ -7										
		24 32										
3RH2911-2DE11	2 2	41 53 23 31	32			22	22					
		142 154 124 132										
For size S0/S2, S		Left Right	01	10	00	11	4.4	00	00			
3RH2921-2DE11	1 1	33 41	21	12	22	11	11	22	22			
		7.7.										
20024 20544	2 2	34 42	20	22	22	22	22	22				
3RH2921-2DE11	2 2	51 63 33 41	32	23	33	22	22	33				
		52 64 34 42										
For contactor rel	ave	Left										
3RH2921-□DE11		51 63								51X	42X	33X
	' '	<u></u>								VIX		JUA
		52 64										

¹⁾ Combinations according to EN 50012, EN 50011 and IEC 60947-5-1 are in **bold print**. All combinations comply with EN 50005.

Accessories for 3RT2 Contactors

Auxiliary switch blocks

PU (UNIT, SET, M) = 1 PS* = 1 PG = 4 = 1 unit = 41B





3RH2911-1HA2

			0111123111 1111/122		OTTI ZI I/ CZ	
For contactors / contactor relays ¹⁾	Auxiliary contacts Version	DT	Screw terminals	+	Spring-type terminals	<u></u>
	\		Article No.	Price per PU	Article No.	Price per PU
Type	NO NC					

contactor relays ¹⁾	Version	on						terminals	
	\	 				Price er PU		Article No.	Price per PU
Туре	NO	NC							
		ks for	snapping onto the front						
Sizes S00 to S2	(2)								
3RT2.1., 3RT2.2., 3RT2.3.		1	.1 - - .2	•	3RH2911-1HA01			3RH2911-2HA01	
3RH21, 3RH24		2	1	•	3RH2911-1HA02)	•	3RH2911-2HA02	
		3	1	В	3RH2911-1HA03	1	В	3RH2911-2HA03	
	1		.3	В	3RH2911-1HA10	[В	3RH2911-2HA10	
	1	1	1 3	•	3RH2911-1HA11)	•	3RH2911-2HA11	
	1	2	1 1 3 + + 1 3 2 2 4	•	3RH2911-1HA12	,	•	3RH2911-2HA12	
	1	3	1	>	3RH2911-1HA13)	•	3RH2911-2HA13	
	2		3 3	>	3RH2911-1HA20	,	•	3RH2911-2HA20	
	2	1	1 3 3 3 4 4 4	В	3RH2911-1HA21	[В	3RH2911-2HA21	
	2	2	1 1 3 3 3	•	3RH2911-1HA22)		3RH2911-2HA22	
	3		$\begin{bmatrix} 3 & 1 & 3 \\ 1 & 1 & 4 \end{bmatrix}$	В	3RH2911-1HA30	Į.	В	3RH2911-2HA30	
	3	1	1 3 3 3 3 3 2 4 4 4 4	•	3RH2911-1HA31			3RH2911-2HA31	

¹⁾ For detailed information on use, see page 3/59.

²⁾ The 3RH29 auxiliary switches are also available with ring terminal lug connection. The 8th digit of the article number must be changed from a "1" to a "4", e.g. 3RH2911-1HA22 → 3RH2911-4HA22.

Auxiliary switch blocks

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B













For contactors / contactor relays 1)

SHIZ	
Connections	
Position	

DT :

DT Screw terminals

Article No.

Price per PU

Spring-type terminals

Article No. Price per PU

Туре		NO	NC	NO	NC
Auxiliary sw	tch blocks for sna	apping	ont	o the	front

Sizes Sol to S2 SRT2.1.	Auxilial y Swi	ICH DIOCKS IOI :	Silappili	y om	io iii	e IIO	111				
SRT2.2. SRT2.3. SRT2.3.	Sizes S00 to	S2							_		
SRH24	3RT2.2., 3RT2.3.		4				4-4-4-1	•	3RH2911-1FA40	•	3RH2911-2FA40
1			2	2			7-7-7	В	3RH2911-1FA22	В	3RH2911-2FA22
1				4			[-7-7-7	В	3RH2911-1FA04	В	3RH2911-2FA04
1- and 2-pole auxiliary switch blocks, cable entry from top or bottom 3RT2.1., Top 1					1	1	\\ -\ \\	•	3RH2911-1FB11	•	3RH2911-2FB11
1- and 2-pole auxiliary switch blocks, cable entry from top or bottom 3RT2. 1., Top 1 73 3RH2911-1AA10 3RH2911-1BA10 3RH2911-1BA10 3RH2911-1BA10 3RH2911-1BA10 3RH2911-1BA10 3RH2911-1BA10 74 3RH2911-1BA01 75 81 81 81 81 81 81 81			1	1	1	1	\- - - - -	•	3RH2911-1FB22	•	3RH2911-2FB22
3RT2.1.,					2	2	\	•	3RH2911-1FC22	•	3RH2911-2FC22
3RT2.2., 3RT2.3. Bottom 1 <td< th=""><th>1- and 2-pole a</th><th>uxiliary switch blo</th><th>ocks, cab</th><th>le en</th><th>try fr</th><th>om to</th><th>p or bottom</th><th></th><th></th><th></th><th></th></td<>	1- and 2-pole a	uxiliary switch blo	ocks, cab	le en	try fr	om to	p or bottom				
3RT2.3. 3RH21, 3RH24 Top 1 71 72 3RH2911-1AA01 Bottom 1 1 73 81 3RH2911-1MA11 Bottom 1 1 73 83 3RH2911-1LA20 Bottom 2 73 83 3RH2911-1MA20		Тор	1				73	>	3RH2911-1AA10		
Top	3RT2.3.	Bottom	1				\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	•	3RH2911-1BA10		
Bottom 1 3RH2911-1BA01 72 81 3RH2911-1LA11 73 81 3RH2911-1LA11 3RH2911-1MA11 3RH2911-1MA11 3RH2911-1MA20 3RH2911-1MA20 3RH2911-1MA20 3RH2911-1MA20 3RH2911-1MA20 3RH2911-1MA20 3RH2911-1MA20 3RH2911-1MA20 3RH2911-1MA20		Ton		1					3DU2011 1AA01		
Top 1 1 1 73 81 SRH2911-1LA11 Bottom 1 1 1 73 83 SRH2911-1LA20 SRH2911-1MA20	3111124	· ·		1			L _* '				_
Bottom 1 1 1 \ \ \ \ \ \ \ \ \ \ \ \ \ \		DOLLOITI		ı			72		JKHZ911-IBAU1		-
Top 2 73 83 3RH2911-1LA20 Strate Str		Тор	1	1			73 81	>	3RH2911-1LA11		
Bottom 2 \\-\\-\\-\\\-\\\\-\\\\-\\\\\-\\\\\\		Bottom	1	1			74 82	•	3RH2911-1MA11		-
		Тор	2				73 83	>	3RH2911-1LA20		
117107		· ·					74 84	•	3RH2911-1MA20		-

 $^{^{\}rm 1)}$ For detailed information on use, see pages 3/59 and 3/60.

Accessories for 3RT2 Contactors

Auxiliary switch blocks

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B









RH2911-1XA22-0MA0	3RH2911-2XA22-

	0111120111127102	0111120111201102		01111201111111111111111111			01111201112711122 01111110	
For contactors / contactor relays	Auxiliary contacts Version		DT	Screw terminals		DT	Spring-type terminals	<u> </u>
Туре	NO NC			Article No.	Price per PU		Article No.	Price per PU
A.miliam, amita	h blaska fan anannin	ar a rata tha fire unt						

Auxillary	y switch blocks	for snapping	onto the front

Sizes S00 to	S2						
3RT2.1., 3RT2.2., 3RT2.3. ¹⁾ 3RH21.	4		53 63 73 83 54 64 74 84	В	3RH2911-1XA40-0MA0	В	3RH2911-2XA40-0MA0
3RH21, 3RH24 ¹⁾	3	1	53 61 73 83 - +	В	3RH2911-1XA31-0MA0	В	3RH2911-2XA31-0MA0
	2	2	53 61 71 83 - + - + - + - + - + - + - + - + - + - +	В	3RH2911-1XA22-0MA0	В	3RH2911-2XA22-0MA0
		4	51 61 71 81 	В	3RH2911-1XA04-0MA0	В	3RH2911-2XA04-0MA0

Laterally mountable auxiliary switch blocks, mounting on the right and/or on the left

Size S00			Left	Right				
3RT2.1. ²⁾		2	41 51	21 31	А	3RH2911-1DA02	А	3RH2911-2DA02
	1	1	41 53 42 54	21 33	А	3RH2911-1DA11	А	3RH2911-2DA11
	2		43 53 	23 33	А	3RH2911-1DA20	А	3RH2911-2DA20
Sizes S0 and	d S2		Left	Right				
3RT2.2., 3RT2.3. ²⁾³⁾		2	51 61 	31 41	А	3RH2921-1DA02	A	3RH2921-2DA02
	1	1	51 63 52 64	31 43 • 32 44	А	3RH2921-1DA11	A	3RH2921-2DA11
	2		53 63 - 1 54 64	33 43	А	3RH2921-1DA20	А	3RH2921-2DA20

¹⁾ For detailed information on use, see page 3/61.

²⁾ For detailed information on use, see pages 3/62 and 3/63.

 $^{^{\}rm 3)}$ With 3RT232., 3RT252., mountable only on the right.

Accessories for 3RT2 Contactors

Auxiliary switch blocks









3RH2911-2DE11

For contactors / contactor relays¹⁾ Contacts Version

DT Screw terminals

Article No.

(1) Price

per PU

Spring-type terminals Price Article No. per PU

NC Electronic compatible auxiliary switch blocks

NO

- For operation in dusty atmospheres
 For electronic circuits with rated operational currents I_e/AC-14 and DC-13 of 1 ... 300 mA at 3 ... 60 V
 Hard gold-plated contacts
- Mirror contacts acc. to IEC 60947-4-1, Appendix F, for auxiliary switches for mounting on the side (The following applies for auxiliary switch blocks with contactors of size S0 and S2: the NC contacts are mirror contacts)

Auxiliary switch blocks for snapping onto the front²⁾ Sizes S00 to S2

0.200 000 10 02							
3RT2.1., 3RT2.2., 3RT2.3.		2 ³⁾	-1 	А	3RH2911-1NF02	А	3RH2911-2NF02
3RH21	1	1 ³⁾	.2 .2 .3 .1 	•	3RH2911-1NF11	>	3RH2911-2NF11
	2		.4 .2 .3 .3	•	3RH2911-1NF20	•	3RH2911-2NF20
			.4				

Laterally mountable auxiliary switch blocks, mounting on the right and/or on the left

Size S00			Left	Right			
3RT2.1.	1	1	41 53 - 42 54	23 31		А	3RH2911-2DE11
Sizes S0 and S2			Left	Right			
3RT2.2., 3RT2.3.	1	1	51 63 52 64	33 41	-	А	3RH2921-2DE11

¹⁾ For detailed information on use, see pages 3/61 and 3/63.

²⁾ The 3RH2911-. NF.. auxiliary switches are also available with ring terminal lug connection. In the 8th position of the article number, the "1" must be replaced with "4", e.g.: 3RH2911-1NF11 → 3RH2911-4NF11

Accessories for 3RT2 Contactors

Auxiliary switch blocks, delayed

Selection and ordering data

PU (UNIT, SET, M) = 1 = 1 unit = 41B





3RA2813-1FW10

3RA2813-2AW10

For contactors	Rated control supply voltage U_s^{-1}	Time setting range <i>t</i>	Output / auxiliary contacts	DT	Screw terminals	⊕ D1	Spring-type terminals	$\stackrel{\circ}{\square}$
Туре	V	S			Article No.	Price per PU	Article No.	Price per PU

Solid-state time-delay auxiliary switches for mounting on 3RT2 contactors

Sizes S	00 to S2						
	The electrical connection switch and the contactor is snapped on and lock	or underneath is es					
	ON-delay Varistor integrated						
3RT2.,	24 240 AC/DC	0.05100,	1 CO	Α	3RA2813-1AW10	Α	3RA2813-2AW10
3RH21 ²⁾ 3RH24		(1, 10, 100 selectable)	1 NO + 1 NC	Α	3RA2813-1FW10	А	3RA2813-2FW10
	OFF-delay with control Varistor integrated	ol signal					
3RT2.,	24 240 AC/DC	0.05100,	1 CO	Α	3RA2814-1AW10	Α	3RA2814-2AW10
3RH21 ²⁾ 3RH24		(1, 10, 100 selectable)	1 NO + 1 NC	Α	3RA2814-1FW10	А	3RA2814-2FW10
	OFF-delay without co Varistor integrated	ntrol signal ³⁾					
3RT2.,	24 240 AC/DC	0.05100,	1 CO	Α	3RA2815-1AW10	Α	3RA2815-2AW10
3RH21 ²⁾ 3RH24		(1, 10, 100 selectable)	1 NO + 1 NC	Α	3RA2815-1FW10	А	3RA2815-2FW10

 $^{^{\}rm 1)}$ AC voltage values apply for 50 Hz and 60 Hz.

Operating travel diagrams

Function	Function charts	
	☑ Timing relay energized☐ Contact closed☐ Contact open	
Solid-state time-delay auxiliary switches	With 1 CO contact	With 1 NO contact + 1 NC contact
ON-delay (varistor integrated)	3RA2813AW10 A1/A2	3RA2813FW10 A1/A2
OFF-delay with control signal (varistor integrated)	3RA2814AW10 A3/A2 ////////// B1/A2 ///////////////////////////////////	3RA2814FW10 A3/A2 B1/A2 27/28 35/36
OFF-delay without control signal (varistor integrated)	3RA2815AW10 ≥ 200 ms A1/A2 15/18 15/16	3RA2815FW10 ≥ 200 ms A1/A2 27/28 35/36

For technical specifications, see page 3/53.

²⁾ Cannot be fitted onto coupling relays.

³⁾ Setting of output contacts in as-supplied state not defined (bistable relay). Application of the control supply voltage once results in contact change-over to the correct setting.



Auxiliary switch blocks, delayed

For contactors	Rated control supply voltage $U_{\rm S}$	Time setting range t DT	Screw terminals	+	PU (UNIT, SET, M)	PS*	PG
Туре	V	S	Article No.	Price per PU			

Pneumatic time-delay auxiliary switches for mounting on 3RT2 contactors



Size S0 Auxiliary contacts 1 NO and 1 NC¹⁾

ON-delay						
3RT202.,	 0.1 30	С	3RT2926-2PA01	1	1 unit	41B
	0.1 30 ²⁾	С	3RT2926-2PA01-0MT0	1	1 unit	41B
	1 60	С	3RT2926-2PA11	1	1 unit	41B
	1 60 ²⁾	С	3RT2926-2PA11-0MT0	1	1 unit	41B
OFF-delay						
3RT202.	 0.1 30	С	3RT2926-2PR01	1	1 unit	41B
	0.1 30 ²⁾	С	3RT2926-2PR01-0MT0	1	1 unit	41B
	1 60	С	3RT2926-2PR11	1	1 unit	41B
	1 60 ²⁾	С	3RT2926-2PR11-0MT0	1	1 unit	41B

For technical specifications, see page 3/55.

¹⁾ In addition to these, no other auxiliary contacts are permitted.

²⁾ Certificate for furnaces according to EN 50156-1 on request.

Accessories for 3RT2 Contactors

Delay and latching blocks

Selection and ordering data

PU (UNIT, SET, M) = 1 = 1 unit = 41B





3RA2832-2DG10

A 3RA2832-2DH10

0.2 .50		0.1.7 (2011)
w terminals	DT	Spring-type

For contactors	Rated control supply voltage $U_s^{1)}$	Time setting range t	DT	Screw terminals		DT	Spring-type terminals	<u>~</u>
Туре	V AC/DC	s		Article No. Price per PU			Article No.	Price per PU
Timing rela	ys for mounting on 3RT2 con	itactors						
	Sizes S00 to S2							
	The electrical connection between the timing relay and the contactor underneath is established automatically when it is snapped on and locked.							
ON-delay Two-wire design, varistor integrated		ed						
3RT20, 3RT23, 3RT25, 3RH21 ²⁾ , 3RH24	24 240	0.05100 (1, 10, 100; selectable)	А	3RA2811-1CW10		Α	3RA2811-2CW10	
3RT203.	24 90	0.05100	Α	3RA2831-1DG10		Α	3RA2831-2DG10	
	90 240	(1, 10, 100; selectable)	Α	3RA2831-1DH10		Α	3RA2831-2DH10	
	OFF-delay with control signal Varistor integrated							
3RT20, 3RT23, 3RT25, 3RH21 ²⁾ , 3RH24	24 240	0.05100 (1, 10, 100; selectable)	А	3RA2812-1DW10		Α	3RA2812-2DW10	

0.05 ...100 (1, 10, 100; selectable)

24 ... 90

90 ... 240

3RT203.

3RA2832-1DG10

3RA2832-1DH10

	For contactors	Rated control supply voltage $U_{\rm S}$			Screw terminals Article No.	Price	PU (UNIT, SET, M)	PS*	PG
	Туре	V	S		Article No.	per PU			
OFF-delay device	S								
	Sizes S00 to S2								
	For contactors with DC Non-adjustable delay ti								
5-0	3RT2011BF4., 3RT2021BF4., 3RT2031NF3., 3RH21BF40	110 AC/DC 110 DC	S00: > 0,1 S0: > 0,08 S2: > 0,25	В	3RT2916-2BK01		1	1 unit	41B
	3RT2011BM4./1BP4., 3RT2021BM4./1BP4., 3RT2031NP3., 3RH21BM40/1BP40		S00: > 0,5 S0: > 0,3 S2: > 0,8	В	3RT2916-2BL01		1	1 unit	41B
3RT2916-2B.01	3RT2011BB4., 3RT2021BB4., 3RT2031NB3., 3RH21BB40	24 DC	S00: > 0,2 S0: > 0,1 S2: > 0,1	Α	3RT2916-2BE01		1	1 unit	41B

Mechanical latching blocks

Size S0 For snapping onto the front of contactors

The contactor remains in the energized state after a voltage failure

3RT202. 24 AC/DC 3RT2926-3AB31 41B В 1 unit 110 AC/DC В 3RT2926-3AF31 1 unit 41B 230 AC/DC В 3RT2926-3AP31 1 unit 41B

3RT2926-3A.31

For technical specifications, see page 3/54.

 $^{^{\}rm 1)}\,$ AC voltage values apply for 50 Hz and 60 Hz.

²⁾ Cannot be fitted onto coupling relays.

For technical specifications, see page 3/195.



Surge suppressors

Selection and ord	lering dat	ta								
	For contactors	Version	Rated control s	upply voltage $U_{\rm s}^{-1}$	DT	Article No. ²⁾	Price per PU	PU (UNIT, SET, M)	PKG* ²⁾	PG
			AC operation	DC operation						
	Туре		V AC	V DC						
Surge suppressor	rs without	LED (also for spring	-type terminal	s)						
	Size S00									
		For plugging onto the followith and without auxili								
	3RT2.1, 3RH2.	Varistors	24 48 48 127 127 240 240 400 400 600	24 70 70 150 150 250 	A	3RT2916-1BB00 3RT2916-1BC00 3RT2916-1BD00 3RT2916-1BE00 3RT2916-1BF00		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
3RT2916-1B.00	3RT2.1, 3RH2.	RC elements	24 48 48 127 127 240 240 400 400 600	24 70 70 150 150 250 	A A	3RT2916-1CB00 3RT2916-1CC00 3RT2916-1CD00 3RT2916-1CE00 3RT2916-1CF00		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
	3RT2.1, 3RH2.	Noise suppression diodes		12 250	>	3RT2916-1DG00		1	1 unit	41B
	3RT2.1, 3RH2.	Diode assemblies (diode and Zener diode) for DC operation		12 250	•	3RT2916-1EH00		1	1 unit	41B
	Size S0									
		For plugging onto the fi (prior to mounting of th								
	3RT2.2	Varistors	24 48 48 127 127 240 240 400 400 600	24 70 70 150 150 250 	A	3RT2926-1BB00 3RT2926-1BC00 3RT2926-1BD00 3RT2926-1BE00 3RT2926-1BF00		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
3RT2926-1E.00	3RT2.2	RC elements	24 48 48 127 127 240 240 400 400 600	24 70 70 150 150 250 	A A	3RT2926-1CB00 3RT2926-1CC00 3RT2926-1CD00 3RT2926-1CE00 3RT2926-1CF00		1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
	3RT2.2	Diode assembly for DC operation		24 30 250	A	3RT2926-1ER00 3RT2926-1ES00		1	1 unit 1 unit	41B 41B
	Size S2									-
		For plugging onto the for (prior to mounting of the								
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	3RT2.3.	Varistors	24 48 48 127 127 240 240 400 400 600	24 70 70 150 150 250 	▶BB	3RT2936-1BB00 3RT2936-1BC00 3RT2936-1BD00 3RT2936-1BE00 3RT2936-1BF00		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
3RT2936-1B.00	3RT2.3.	RC elements	24 48 48 127 127 240 240 400 400 600	24 70 70 150 150 250 	▲ ▲ B B	3RT2936-1CB00 3RT2936-1CC00 3RT2936-1CD00 3RT2936-1CE00 3RT2936-1CF00		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
3RT2936-1E.00	3RT2.3.	Diode assembly for DC operation		24 30 250	•	3RT2936-1ER00 3RT2936-1ES00		1	1 unit 1 unit	41B 41B

¹⁾ Can be used for AC operation for 50/60 Hz. Please inquire about further voltages.

²⁾ For packs of 10 or 5 units, "-Z" and order code "X90" must be added to the article number.

Accessories for 3RT2 Contactors

Surge suppressors

	For contactors	Version	Rated control voltage $U_s^{(1)}$ AC	ol supply	Power consumption P of the LED	DT	Article No. ²⁾	Price per PU	PU (UNIT, SET, M)	PKG* ²⁾	PG
			operation	operation	at $U_{\rm S}$						
	Type		V AC	V DC	mW						
Surge suppresso	rs with LE	D (also for sprir	ng-type tern	ninals)							
	Size S00										
and the same of th		For plugging onto (with and without			tactors						
	3RT2.1.,	Varistors	24 48	12 24	10 120	>	3RT2916-1JJ00		1	1 unit	41B
	3RH2.		48 127 127 240	24 70 70 150	20 470 50 700	>	3RT2916-1JK00 3RT2916-1JL00		1	1 unit 1 unit	41B 41B
				150 250	160 950	Α	3RT2916-1JP00			1 unit	41B
	3RT2.1.,	Noise suppres-		24 70	20 470		3RT2916-1LM00		1	1 unit	41B
	3RH2.	sion diodes		50 150 150 250	50 700 160 950	A	3RT2916-1LN00 3RT2916-1LP00		1 1	1 unit 1 unit	41B 41B
3RT2916-1J.00				150 250	100 950		3K12910-1LF00		'	i uiiit	410
	Size S0										
		For plugging onto (prior to mountin									
	3RT2.2.	Varistors	24 48	12 24	10 120	\blacktriangleright	3RT2926-1JJ00		1	1 unit	41B
			48 127 127 240	24 70 70 150	20 470 50 700	>	3RT2926-1JK00 3RT2926-1JL00		1 1	1 unit 1 unit	41B 41B
	3RT2.2.	Diode assembly		24	20 470	<u> </u>	3RT2926-1MR00		1	1 unit	41B
3RT2926-1MR00											
	Size S2	NEW									
		For plugging onto (prior to mounting									
3RT2936-1J.00	3RT2.3.	Varistors	24 48 48 127 127 240	12 24 24 70 70 150	10 120 20 470 50 700	B B	3RT2936-1JJ00 3RT2936-1JK00 3RT2936-1JL00		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
JI112930-1J.UU											

¹⁾ Can be used for AC operation for 50/60 Hz. Please inquire about further voltages.

²⁾ For packs of 10 or 5 units, "-Z" and order code "X90" must be added to the article number



Power Contactors for Switching Motors Accessories for 3RT2 Contactors

					0	ther fur	nction b	locks
Selection and orde	ering data							
	For contactors	Version	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Туре							
EMC suppression								
	Size S00 (for	contactors with AC or DC operation) ¹⁾		Screw terminals	(1)			
ال المحال	3RT201	RC elements (3 × 220 Ω/0.22 μF)						
1111		Up to 400 V Up to 575 V Up to 690 V	A C	3RT2916-1PA1 3RT2916-1PA2 3RT2916-1PA3		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
	3RT201	Varistors						
3RT2916-1PA.		Up to 400 V Up to 575 V Up to 690 V	A A C	3RT2916-1PB1 3RT2916-1PB2 3RT2916-1PB3		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
Coupling links for	control by PL	C						
100	Size S0 3RT2.2	For mounting onto the coil terminals of the contactors (only for contactors with screw terminals)	>	3RH2924-1GP11		1	1 unit	41B
3RH2924-1GP11		With LED for indicating switching state. With integrated varistor for damping opening surges. 24 V DC control, 17 30 V DC operating range						
0111202110111	Sizes S00 to	S2 NEW						
4	3RT2.1, 3RT2.2, 3RT2.3	For mounting on the front side of contactors with AC, DC or AC/DC operation 24 V DC control.	В	3RH2914-1GP11		1	1 unit	41B
-		17 30 V DC operating range		On sing a few s				
to to to to to				Spring-type terminals	$\stackrel{\infty}{\mathbb{H}}$			
3RH2914-1GP11		24 V DC control, 17 30 V DC operating range	В	3RH2914-2GP11		1	1 unit	41B
Additional load mo								
	Size S00 3RT2.1, 3RH2.	For plugging onto the front side of the contactors with or without auxiliary switch blocks ²⁾ For increasing the permissible residual current	>	3RT2916-1GA00		1	1 unit	41B
		and for limiting the residual voltage. It ensures the safe opening of contactors with direct control via 230 V AC semiconductor outputs of SIMATIC controllers. It acts simultaneously as a surge suppressor. Rated voltage:						
3RT2916-1GA00		50/60 Hz, 180 to 255 V AC						
LED module for inc	-							
	Sizes S00 to 3RT2	For snapping into the location hole of an inscription label on the front of a contactor either directly on the contactor or on the front auxiliary switch.	В	3RT2926-1QT00		1	5 units	41B
		The LED module is connected to coil terminals A1 and A2 of the contactor and indicates its energized state. Yellow LED.						
3RT2926-1QT00		Rated voltage: 24 240 V AC/DC, with reverse polarity protection.						
Control kit								
	Sizes S00 to							
The same of the sa		For manual operation of the contactor contacts for start-up and service ³⁾						
	3RT2.1,	•	Α	3RT2916-4MC00		1	5 units	41B
3RT2916-4MC00	3RH2. 3RT2.2 3RT2.3		A A	3RT2926-4MC00 3RT2936-4MC00		1	5 units 5 units	41B 41B
	UI 11 Z. U	0)	^	OTT 2330-4IVIOUU		<u>'</u>	o urins	41D

Technical specifications for coupling links, see page 3/57.

¹⁾ See also description on page 3/52.

 $^{^{2)}\,}$ For packs of 10 units, the article number must be supplemented with "-Z" and order code "X90".

³⁾ See also Chapter 8, "ET 200S Motor Starters and Safety Motor Starters" → "Accessories", Article No. 3RK1903-0CA00.

Accessories for 3RT2 Contactors

Terminals, covers, adapters, connectors

Terminals, covers	, adapters, c	connectors					
Selection and orde	ring data						
	For contactors	Version	DT	Article No. Pri		PS*	PG
	Туре				OL1, WI)		
Sealable covers	31						
	Sizes S00 to	S2					
TH	3RT2.1, 3RT2.2, 3RT2.3, 3RH2. ¹⁾	Sealable covers for preventing manual operation (Not suitable for coupling relays)	А	3RT2916-4MA10	1	5 units	41B
3RT2916-4MA10							
Connection module	es for contact	ors with screw terminals					
	Sizes S00 an	d S0					
		Adapters for contactors Ambient temperature $T_{\text{u max}} = 60 ^{\circ}\text{C}$	_	Screw terminals			
	3RT2.1, 3RH2.	Size S00, rated operational current $I_{\rm e}$ at AC-3/400 V: 20 A	В	3RT1916-4RD01	1	1 unit	41B
3RT1926-4RD01	3RT2.2	Size S0, rated operational current $I_{\rm e}$ at AC-3/400 V: 25 A	В	3RT1926-4RD01	1	1 unit	41B
	3RT2.1, 3RT2.2, 3RH2.	Plugs for contactors Size S00, S0	В	3RT1900-4RE01	1	1 unit	41B
	OTTIE.						
3RT1900-4RE01							
Terminal covers for		vith box terminals					
	Size S2 NEW	On the facility of the state of					
	3RT203	Covers for box terminals For 3-pole contactors	В	3RT2936-4EA2	1	1 unit	41B
0.0	3RT233,	For 4-pole contactors (see Chapter 4)	В	3RT2936-4EA4	1	1 unit	41B
	3RT253						
3RT2936-4EA2 Coil connection mo	dulco						
Con connection inc	Sizes S0 and	192					
	3RT2.2,	Connection from top	Α	3RT2926-4RA11	1	1 unit	41B
The same of the sa	3RT2.3	Connection from below	Α	3RT2926-4RB11	1	1 unit	41B
775		Connection diagonally	А	3RT2926-4RC11	1	1 unit	41B
3RT2926-4RA11				Spring-type terminals			
NE 10 10 10 10 10 10 10 10 10 10 10 10 10	3RT2.2	Connection from top	Α	3RT2926-4RA12	1	1 unit	41B
4		Connection from below	А	3RT2926-4RB12	1	1 unit	41B
3RT2926-4RA12 Covers for contacto	ors with ring o	cable lug connections					
	Size S00						
				Ring terminal lug connections)		
HEE	3RT2.1, 3RH2	Covers for ring terminal lug connections Single covers	В	3RT2916-4EA13	1	10 units	41B
3RT2916-4EA13	Size S0						
3RT2926-4EB13	3RT2.2	Covers for ring terminal lug connections Set for one device, comprising 4 single covers: - 2 x 3RT2926-4EB13 - 2 x 3RV2928-4AA00	В	3RT2926-4EB13	1	1 unit	41B
3.112020 FLD10		2 / 3.11 2020 1/ 1/00					

Technical specifications for connection modules, see page 3/56.

Exception: contactors and contactor relays with auxiliary switch block mounted onto the front.



Power Contactors for Switching Motors Accessories for 3RT2 Contactors

Terminals, covers, adapters, connectors

				·				
	For contactors	Version	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Туре					OL1, IVI)		
Screw adapters for		ntactors						
	Sizes S0 and	I \$2		ı				
NSB0_01470	3RT2.2, 3RT2.3	Screw adapters for easier screw fixing 2 units required per contactor (1 pack contains 10 sets for 10 contactors)	С	3RT1926-4P		1	10 units	41B
3RT1926-4P								
Solder pin adapter		rs up to 5.5 kW / 12 A						
	Size S00, up	to 5.5 KW		0	-			
				Screw terminals	+			
1999	3RT2.1, 3RH21	Assembly kit for soldering contactors onto a printed circuit board. For 1 contactor, 1 set is required.	Α	3RT1916-4KA1		1	4 units	41B
3RT1916-4KA1								
Solder pin adapter	s for contacto	rs up to 5.5 kW / 12 A						
with mounted 4-po	•							
	Size S00, up 3RT2.1,	Assembly kit for soldering contactors with an	В	3RT1916-4KA2		1	4 units	41B
	3RH21	auxiliary switch block onto a printed circuit board. For 1 contactor, 1 set is required.	D	3K11910-4KAZ		'	4 uriits	410
999								
3RT1916-4KA2								
Safety main curren	it conn <u>ectors i</u>	for 2 contactors						
	Sizes S00 to			ı				
		For series connection of 2 contactors						
	3RT2.1		Α	3RA2916-1A		1	1 unit	41B
	3RT2.2 3RT2.3 NEW		A A	3RA2926-1A 3RA2936-1A		1 1	1 unit 1 unit	41B 41B
3RA2926-1A								

Accessories for 3RT2 Contactors

Terminals, covers, adapters, connectors

	For contactors	Max. conductor cross-sections	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Type	mm ²				OL1, IVI)		
Links for paralleli	ng							
	Sizes S00 to	S2						
	3-pole, with connection	on terminal ¹⁾²⁾		Screw terminals	+			
Trans	3RT201	25, stranded	•	3RT1916-4BB31		1	1 unit	41B
3RT1916-4BB31	3RT202	50, stranded	А	3RT2926-4BB31		1	1 unit	41B
3RT2926-4BB31								
	3RT203 NEW	120, stranded	•	3RT1936-4BB31		1	1 unit	41B
3RT2936-4BB31	4-pole,	1)2)						
The state of the s	with connection 3RT231, 3RT251	on terminal ¹⁾²⁾ 25, stranded	С	3RT1916-4BB41		1	1 unit	41B
3RT1916-4BB41								

¹⁾ The links for paralleling can be reduced by one pole.

²⁾ With sizes S00 to S2 the links for paralleling are insulated.

	Version	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Insulation stop for so on conductors up to	ecurely holding back the conductor insulation 1 mm ²						
			Spring-type terminals	$\stackrel{\infty}{\mathbb{H}}$			
THE STATE OF	Insulation stop strip can be inserted in cable entry of the spring-type terminal (2 strips per contactor required)						
3RT1916-4JA02	 For basic units S00 (3RT2.1. or 3RH2.), removable individually 	В	3RT2916-4JA02		1	20 units	41B
0.0.0	 For auxiliary and control current on basic units size S0 and S2 (3RT2.2., 3RT2.3.) and for mountable 3RH29 auxiliary switches, removable in pairs 	В	3RT1916-4JA02		1	20 units	41B
Tools for opening sp	oring-type terminals						
	Screwdrivers for all SIRIUS devices with spring-type terminals Length: approx. 200 mm, 3.0 mm x 0.5 mm, titanium gray/black, partially insulated	Α	3RA2908-1A		1	1 unit	41B
3RA29 08-1A							
Blank labels							
	Unit labeling plates for SIRIUS devices ¹⁾						
붜붜붜	• 10 mm × 7 mm, titanium gray	D	3RT2900-1SB10		100	816 units	41B
	• 20 mm × 7 mm, titanium gray	D	3RT2900-1SB20		100	340 units	41B
3BT2900-1SB20	Adhesive labels for SIRIUS devices • 19 mm × 6 mm, titanium gray	D	3RT2900-1SB60		100	3060 units	41B
C2000 .OB20							

PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH

(see Chapter 16, "Appendix" → "External Partners").



Power Contactors for Switching Motors Spare Parts for 3RT2 Contactors

Solenoid coils, contacts and arc chutes

Selection and ordering data

For screw, spring-type and ring terminal lug connection



3RT2924-5A.01

						3H12924-5A.U1				
For contact	otors	Rated cont	trol supply voltage	e U _s	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Туре	50 Hz	50/60 Hz	60 Hz						
	71	V	V	V						
Solenoid	d coils · AC opera	ation								
S0	3RT2023A,	24			В	3RT2924-5AB01		1	1 unit	41B
	3RT2024A, 3RT2025A	42			В	3RT2924-5AD01		1	1 unit	41B
	3H12U23A	48 110			В В	3RT2924-5AH01 3RT2924-5AF01		1 1	1 unit 1 unit	41B 41B
		230			В	3RT2924-5AP01		1	1 unit	41B
		400			В	3RT2924-5AV01		1	1 unit	41B
			24 42		B B	3RT2924-5AC21 3RT2924-5AD21		1 1	1 unit 1 unit	41B 41B
			48		В	3RT2924-5AH21		1	1 unit	41B
			110		В	3RT2924-5AG21		1	1 unit	41B
			220 230		B B	3RT2924-5AN21 3RT2924-5AL21		1 1	1 unit 1 unit	41B 41B
				24	В	3RT2924-5AC11		1	1 unit	41B
		110		120	В	3RT2924-5AK61		1	1 unit	41B
		220		240	В	3RT2924-5AP61		1	1 unit	41B
			100 200	110 220	B B	3RT2924-5AG61 3RT2924-5AN61		1 1	1 unit 1 unit	41B 41B
			400	440	В	3RT2924-5AR61		1	1 unit	41B
S0	3RT2026A,	24			В	3RT2926-5AB01		1	1 unit	41B
	3RT2027A, 3RT2028A	42			В	3RT2926-5AD01		1	1 unit	41B
	3RT2325A,	48 110			B B	3RT2926-5AH01 3RT2926-5AF01		1 1	1 unit 1 unit	41B 41B
	3RT2326A,	230			В	3RT2926-5AP01		1	1 unit	41B
	3RT2327A	400			В	3RT2926-5AV01		1	1 unit	41B
	3RT2526A		24		В	3RT2926-5AC21		1	1 unit	41B
			42		В	3RT2926-5AD21		1	1 unit	41B
			48 110		B B	3RT2926-5AH21 3RT2926-5AG21		1	1 unit 1 unit	41B 41B
			220		В	3RT2926-5AN21		1	1 unit	41B
			230	24	B B	3RT2926-5AL21 3RT2926-5AC11		1	1 unit	41B 41B
		 110		24 120	В	3RT2926-5AC11 3RT2926-5AK61		1	1 unit 1 unit	41B 41B
		220		240	В	3RT2926-5AP61		1	1 unit	41B
			100	110	В	3RT2926-5AG61		1	1 unit	41B
			200	220	В	3RT2926-5AN61		1	1 unit	41B
			400	440	В	3RT2926-5AR61		1	1 unit	41B

Note:

Contactors with AC and AC/DC coils have different depths. It is only possible to replace the coils on AC contactors with AC coils, and on AC/DC contactors with AC/DC coils. It is not possible to replace the coils on DC contactors.

Spare Parts for 3RT2 Contactors

Solenoid coils, contacts and arc chutes

For screw, spring-type and ring terminal lug connection





3RT2934-5A.

		3R12934-5	014.31				3R12934-5A.01				
For contacto	irs	Rated con	trol supply voltac	ge U _s		DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Туре	50 Hz	50/60 Hz	60 Hz	DC						
		V	V	V							
Solenoid o	coils · AC opera	ation									
S2 NEW	3RT203A	24				В	3RT2934-5AB01		1	1 unit	41B
	3RT233A	42				В	3RT2934-5AD01		1	1 unit	41B
	3RT253A	48 110				B B	3RT2934-5AH01 3RT2934-5AF01		1	1 unit 1 unit	41B 41B
									1		
		230 400				B B	3RT2934-5AP01 3RT2934-5AV01		1	1 unit 1 unit	41B 41B
			24			В	3RT2934-5AC21		1	1 unit	41B
			42			В	3RT2934-5AD21		1	1 unit	41B
			48			В	3RT2934-5AH21		1	1 unit	41B
			110			В	3RT2934-5AG21		1	1 unit	41B
			220 230			B B	3RT2934-5AN21 3RT2934-5AL21		1	1 unit	41B 41B
		110		120		В	3RT2934-5AL21 3RT2934-5AK61		1	1 unit 1 unit	41B 41B
		220		240		В	3RT2934-5AP61		1	1 unit	41B 41B
				480		В	3RT2934-5AV61		1	1 unit	41B
				600		В	3RT2934-5AT61		i i	1 unit	41B
			100	110		В	3RT2934-5AG61		1	1 unit	41B
			200	220		В	3RT2934-5AN61		1	1 unit	41B
			400	440		В	3RT2934-5AR61		1	1 unit	41B
Solenoid of	coils · AC/DC o	peration, w	vith varistor								
S2 NEW	3RT203N		20 33		20 33	В	3RT2934-5NB31		1	1 unit	41B
	3RT233N		30 42		30 42	В	3RT2934-5ND31		1	1 unit	41B
	3RT253N		48 80 83 155		48 80 83 155	B B	3RT2934-5NE31 3RT2934-5NF31		1	1 unit 1 unit	41B 41B
			175 280		175 280	В	3RT2934-5NP31		1	1 unit	41B
			175 280		173 280	D	3K12934-5NP31		1	i uriit	410

Note:

It is only possible to replace the coils on AC contactors with AC coils, and on AC/DC contactors with AC/DC coils.

For contacto	rs	Version	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Туре							
Contacts	with fixing pai	rts						
For contact	ctors with 3 m	ain contacts						
S2 NEW	3RT2035 3RT2036	Main contacts (3 NO contacts) for utilization category AC-3	B B	3RT2935-6A 3RT2936-6A		1 1	1 unit 1 unit	41B 41B
	3RT2037 3RT2038	(1 set = 3 movable and 6 fixed switching elements with fixing parts)	B B	3RT2937-6A 3RT2938-6A		1 1	1 unit 1 unit	41B 41B
For contact	ctors with 4 m	ain contacts						
S2 NEW	3RT2336	Main contacts (4 NO contacts)	В	3RT2936-6E		1	1 unit	41B
	3RT2337	for utilization category AC-1	В	3RT2937-6E		1	1 unit	41B
		(1 set = 3 movable and 6 fixed switching elements and spare pole with fixing parts)						
Arc chutes	S							
For contact	ctors with 3 m	ain contacts		•				
S2 NEW		Arc chutes, 3-pole						
	3RT203.	Only for contactors with AC coil	В	3RT2936-7A		1	1 unit	41B
	3RT203.	Only for contactors with AC/DC coil	В	3RT2936-7B		1	1 unit	41B

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

Overview

Standards

IEC 60947-1, EN 60947-1, IEC 60947-4-1, EN 60947-4-1,

IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The 3RT1 contactors are suitable for use in any climate. They are finger-safe according to EN 50274.

Connection methods

The 3RT1 contactors are available with screw terminals (box terminals) or spring-type terminals.

The size S3 contactors have removable box terminals for the main conductor connections. This permits connection of ring terminal lugs or busbars.

Contact reliability

If voltages \leq 110 V and currents \leq 100 mA are to be switched, the auxiliary contacts of the 3RT1 contactor or 3RH11 contactor relay should be used as they guarantee a high level of contact reliability.

These auxiliary contacts are particularly suitable for solid-state circuits with currents \geq 1 mA at a voltage \geq 17 V.

Short-circuit protection of the contactors

Short-circuit protection of contactors without overload relay, see "Technical specifications", pages 3/85 and 3/90. For short-circuit protection of contactors with overload relay, see Configuration Manual "SIRIUS Configuration"

http://support.automation.siemens.com/WW/view/en/40625241.

To assemble fuseless motor feeders, you must select combinations of motor starter protector/circuit breaker and contactor as explained in "SIRIUS 3RA1 Load Feeders" (see Chapter 8 "Load Feeders and Motor Starters").

Motor protection

3RU11 thermal overload relays or 3RB20/3RB21 electronic overload relays can be fitted to the 3RT1 contactors for protection against overload. The overload relays must be ordered separately, see Chapter 7, "Protection Equipment" --> "Overload Relays".

Ratings of three-phase motors

The quoted rating (in kW) refers to the output power on the motor shaft (according to the nameplate).

Surge suppression

3RT1 contactors can be retrofitted with RC elements, varistors, diodes or diode assemblies (assembly of diode and Zener diode for short break times) for damping opening surges in the coil.

Note:

The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assembly 2 to 6 times, varistor +2 to 5 ms).

Sizes S00 to S2, up to 22 kW

For 3RT1 devices in these sizes, see Catalog IC 10 AO.

Size S3, up to 45 kW

Auxiliary contact complement

The basic units of size S3 are delivered only with the main contacts and can be extended with auxiliary switch blocks.

For size S3, complete units with mounted auxiliary switch block 2 NO + 2 NC are available (terminal designation according to EN 50012); the auxiliary switch block can be removed. For more information, see Accessories, page 3/108.

Note:

Auxiliary contact complement according to SUVA: Contactors with permanently mounted auxiliary switch block 2 NO + 2 NC are available for safety applications according to SUVA.

Surge suppression

For size S3 contactors, varistors and RC elements can be snapped on either on the top or directly below the coil terminals. Diode assemblies are available in 2 different versions on account of their polarity. Depending on the application they can be connected either only at the bottom (assembly with motor starter protector/circuit breaker) or only at the top (assembly with overload relay).

The plug-in direction of the diodes and diode assemblies is specified by coding.

Exception: 3RT1936-1T.00,

in this case the plug-in direction is marked with "+" and "-".

Sizes S6 to S12, > 45 to 250 kW

- 3RT10, contactors for switching motors,
- 3RT12, vacuum contactors for switching motors,
- 3RT14, contactors for AC-1 applications (see Chapter 4 "Contactors for Special Applications").

Operating mechanism types

Two types of solenoid operation are available:

- Conventional operating mechanisms
- Solid-state operating mechanism (with two performance levels)

Control supply voltage

The contactors can be operated with an AC operating mechanism (50 to 60 Hz) as well as with DC.

Withdrawable coils

For simple coil replacement, e.g. if the application is replaced, the solenoid coil can be pulled out upwards after the release mechanism has been actuated and can be replaced by any other coil of the same size.

Auxiliary contact complement

Contactor sizes S6 to S12 are supplied with mounted auxiliary switch blocks.

For detailed information about the fitting of auxiliary switches, see Accessories, page 3/108.

- 3RT10 and 3RT14 contactors: Auxiliary contacts mounted laterally and on front
- 3RT12 vacuum contactors: Auxiliary contacts mounted laterally

Contactors with conventional operating mechanism

3RT1...-. A version

The solenoid coil is switched directly on and off with the control supply voltage $U_{\rm S}$ by way of terminals A1/A2.

Multi-voltage range for the control supply voltage U_s :

Only one coil covers several close-lying control supply voltages which are used worldwide, e.g. 110–115–120–127 V AC/DC or 220–230–240 V AC/DC. Allowance is made in addition for an operating range of 0.8 times the lower ($U_{\rm S\ min}$) and 1.1 times the upper ($U_{\rm S\ max}$) rated control supply voltage within which the contactor switches reliably and no thermal overload occurs.

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

Contactors with solid-state operating mechanism

The solenoid coil is supplied selectively with the power required for reliable switching and holding by upstream control electronics.

- Wide voltage range for the control supply voltage U_s Compared with the conventional operating mechanism, the solid-state operating mechanism covers an even broader range of control supply voltages used worldwide within one coil version. For example, the coil for 200 to 277 V AC/DC ($U_{\rm s \, min}$ to $U_{\rm s \, max}$) covers the voltages 200-208-220-230-240-254-277 V used worldwide.
- Extended operating range 0.7 to 1.25 x U_s: The wide range for the rated control supply voltage and the additionally allowed coil operating range of 0.8 x $U_{\rm s \, min}$ to 1.1 x $U_{\rm s\,max}$ results in an extended coil operating range of at least 0.7 to 1.25 x $U_{\rm s}$, within which the contactors will operate reliably, for the most common control supply voltages of 24, 110 and 230 V.
- · Bridging temporary voltage dips: Control voltage failures dipping to 0 V (at A1/A2) are bridged for up to approx. 25 ms to avoid unintentional tripping.
- Defined ON and OFF thresholds: For voltages above 0.8 x $U_{\rm s\,min}$ the electronics will reliably switch the contactor ON, and for voltages below the value $0.5 \times U_{\rm s \; min}$ it is reliably switched OFF. The hysteresis in the switching thresholds prevents the main contacts from chattering as well as increased wear or welding when operated in weak, unstable networks. This also prevents thermal overloading of the contactor coil if the voltage applied is too low (contactor does not close properly and is continuously operated with overexcitation).
- Low control power consumption when closing and in the closed state.

Electromagnetic compatibility (EMC)

The contactors with solid-state operating mechanism conform to the requirements for operation in industrial plants:

- · Interference immunity
 - Burst (IEC 61000-4-4): 4 kV
 - Surge (IEC 61000-4-5): 4 kV
 - Electrostatic discharge, ESD (IEC 61000-4-2): 8/15 kV
 - Electromagnetic field (IEC 61000-4-3): 10 V/m
- Emitted interference
 - Limit value class A according to EN 55011

Note:

In connection with converters, the control cables must be routed separately from the load cables to the converter.


Indication of remaining lifetime (RLT)

Main contactor contacts are working parts which therefore must be replaced in good time when the end of their service life has been reached. The degree of contact erosion and thus the electrical endurance (= number of operating cycles) depends on the loading, utilization category, operating mode, etc. Up to now, routine checks or visual inspections by the maintenance personnel were needed in order to gain an insight into the state of the main contacts.

The remaining lifetime indication function now takes over this task. It does not count the number of operating cycles which does not provide information about contact erosion but instead electronically identifies, evaluates and stores the actual progress of erosion of each one of the three main contacts, and outputs a warning when specified limits are reached. The stored data are not lost even if the control supply voltage for A1/A2 fails. After replacement of the main contacts, measurement of the remaining lifetime must be reset using the "RESET" button (hold down RESET button for about 2 s using a pen or similar tool).

Advantages:

 Additional visual display of various levels of erosion by means of LEDs on the laterally mounted solid-state module when remaining lifetime is 60 % (green), 40 % (orange) and 20 % (red).

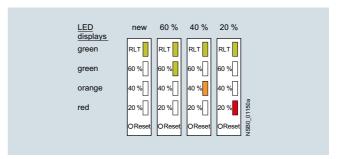


- · Early warning to replace contacts
- Optimum utilization of contact material
- Visual inspection of the condition of contacts no longer necessary
- Reduction of ongoing operating costs
- Optimum planning of maintenance measures
- Avoidance of unforeseen plant downtimes

3RT1...-.N version: for 24 V DC PLC output

2 control options


Control without a coupling link directly through a 24 V DC/≥ 30 mA PLC output (IEC 61131-2). Connection by means of 2-pole plug-in connection. The screwless springtype connection is part of the scope of supply. The control supply voltage which supplies the solenoid operating mechanism must be connected to A1/A2.

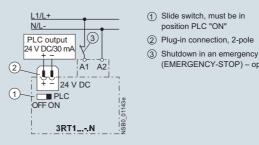

- ① Slide switch, must be in
- 2 Plug-in connection, 2-pole
- (EMERGENCY-STOP) optional

Before start up, the slide switch for PLC operation must be moved to the "PLC ON" position (setting ex works: "PLC OFF").

Conventional control by applying the control supply voltage at A1/A2 through a switching contact.

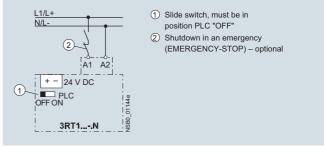


Note:

The slide switch must be in the "PLC OFF" position (= setting ex works).

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

3RT1...-.P version: for 24 V DC PLC output or PLC relay output, with remaining lifetime indicator (RLT)

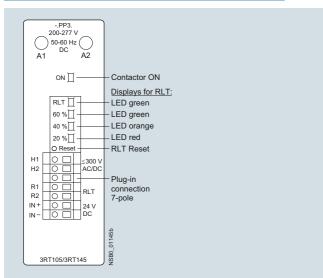

To supply the solenoid and the remaining lifetime indicator with power, the control supply voltage U_s must be connected to terminals A1/A2 of the laterally mounted electronic module. The control inputs of the contactor are connected to a 7-pole plug-in connection; the screwless spring-type connection is part of the scope of supply.


- The "Remaining Lifetime RLT" status signal is available at terminals R1/R2 through a floating relay contact (hard gold-plated, enclosed) and can be input to SIMOCODE, PLC or other devices for processing, for example. Permissible current-carrying capacity of the R1/R2 relay
 - $I_{\rm e}$ /AC-15/24 to 230 V: 3 A $I_{\rm e}$ /DC-13/24 V: 1 A
- LED displays

The following states are indicated by means of LEDs on the laterally mounted solid-state module:

- Contactor ON (energized state): green LED ("ON")
- Indication of remaining lifetime


2 control options:

Contactor control without a coupling link directly through a 24 V DC/≥ 30 mA PLC output (IEC 61131-2) by way of terminals IN+/IN-.

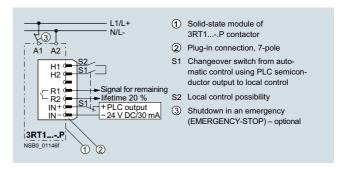

Possibility of switching from automatic control to local control by way of terminals H1/H2, i.e. automatic control through PLC or SIMOCODE/PROFIBUS DP can be deactivated e.g. at start up or in the event of a fault and the contactor can be controlled manually.

- Contactor control through relay outputs at connections H1/H2, e.g. by
 - PLC or
 - SIMOCODE

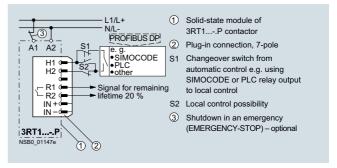

Contact loading: U_s/approx. 5 mA

When operated through SIMOCODE, a communication link to PROFIBUS DP is also provided.

Article No. scheme

Digit of the article No.	1st - 3rd	4th	5th	6th	7th		8th	9th	10th	11th	12th		13th	14th	15th	16th
						-						-				
SIRIUS power contactors	3 R T															
1st generation		1														
Device type (e.g. 0 = 3-pole motor contactor, 3 = 4-pole AC-1 contactor)																
Size of the contactor (4 = S3, 5 = S6, etc.)																
Power dependent on size (e.g. 45 = 37 kW)																
Connection type (1 = screw, 3 = spring)																
Operating range / solenoid coil circuit (e.g. A = AC standard / wit	hout)															
Rated control supply voltage (e.g. P0 = 230 V, 50 Hz)																
Auxiliary switches (e.g. 0 = without auxiliary switches)																
Special version																
Example	3 R T	1	0	4	5	_	1	Α	Р	0	0					

The article No. scheme is presented here merely for information purposes and for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the catalog and in the Industry Mall.

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

Technical specifications

			ADTA
Type			3RT1
Size			S3 to S12
Rated data of the auxiliary contacts			
Acc. to IEC 60947-5-1/EN 60947-5-1 The data apply to integrated auxiliary contacts and cont auxiliary switch blocks for contactor sizes S00 to S12	acts in the		
Rated insulation voltage U _i (pollution degree 3)		V	690
 For laterally mountable auxiliary switch blocks 		V	500
Conventional thermal current $I_{\rm th}$ = Rated operational current $I_{\rm e}/{\rm AC}$ -12		Α	10
AC load			
Rated operational current I _e /AC-15/AC-14			
 For rated operational voltage U_e 	Up to 230 V	Α	6
	380 V 400 V 500 V 660 V ²⁾ 690 V ²⁾	A A A A	3 3 2 1
DC load			
Rated operational current I _e /DC-12			
• For rated operational voltage $U_{\rm e}$	24 V 60 V 110 V 125 V 220 V 440 V 600 V ²⁾	A A A A A	10 6 3 2 1 0.3 0.15
Rated operational current I _e /DC-13			
• For rated operational voltage $U_{\rm e}$	24 V 60 V 110 V 125 V	A A A	10 ¹⁾ 2 1 0.9
	220 V 440 V 600 V ²⁾	A A A	0.3 0.14 0.1
Contact reliability at 17 V, 1 mA according to IEC 60947-5-4/EN 60947-5-4			Frequency of contact faults < 10 ⁻⁸ i.e. < 1 fault per 100 million operating cycles


Endurance of the auxiliary contacts

It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

The contact endurance is mainly dependent on the breaking current.

The characteristic curves apply to:

- Integrated auxiliary contacts on 3RT10
 3RH1911, 3RH1921 auxiliary switch blocks¹⁾

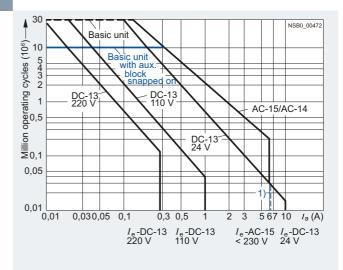

Ia = Breaking current

I_e = Rated operational current

1) DC-13: for mountable auxiliary switch blocks size S00: 6 A

For mountable auxiliary switch blocks size S00 and laterally mountable auxiliary switch blocks size S0 to S12: DC-13 max. 6 A.

²⁾ For laterally mountable auxiliary switch blocks, only the rated operational voltages up to 500 V apply.

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

Type Size

The characteristic curves show the contact endurance of the contactors when switching resistive and inductive AC loads (AC-1/AC-3) depending on the breaking current and rated operational voltage. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

The rated operational current $I_{\rm e}$ complies with utilization category AC-4 (breaking six times the rated operational current) and is intended for a contact endurance of approx. 200 000 operating cycles.

If a shorter contact endurance is sufficient, the rated operational current I_e/AC-4 can be increased.

If the contacts are used for mixed operation, i.e. normal switching (breaking the rated operational current according to utilization category AC-3) in combination with intermittent inching (breaking several times the rated operational current according to utilization category AC-4), the contact endurance can be calculated approximately from the following equation:

$$X = \frac{A}{1 + \frac{C}{100} \left(\frac{A}{B} - 1\right)}$$

Characters in the equation:

- X Contact endurance for mixed operation in operating cycles
- A Contact endurance for normal operation ($I_a = I_e$) in operating cycles
- B Contact endurance for inching (I_a = multiple of I_e) in operating cycles
- C Inching operations as a percentage of total switching operations

3RT1 S3

Size S3

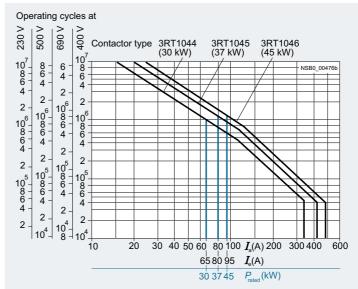


Diagram legend:

 P_{rated} = Rated power for squirrel-cage motors at 400 V I_{a} = Breaking current


= Rated operational current

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW


Type 3RT1
Size \$6 to \$12

Endurance of the main contacts

Sizes S6 to S12

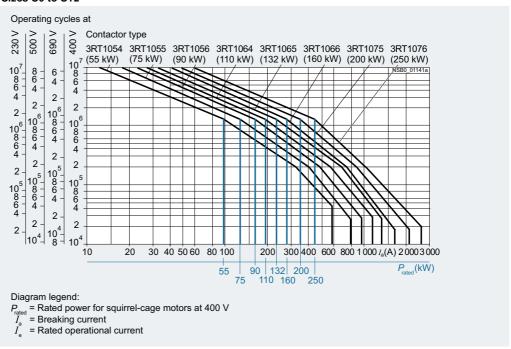

3RT12 vacuum contactors · Sizes S10 and S12

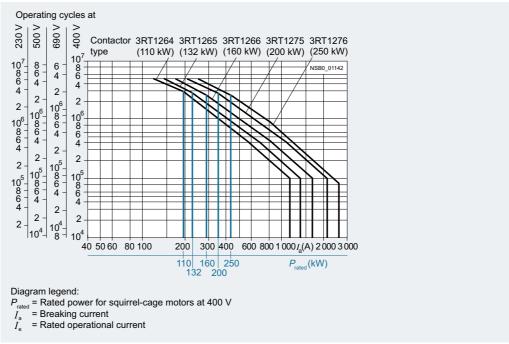



			SIRIUS 3F	RT10 contactors, 3-pole, 3	0 250 kW
		ODT1011	ODT4045	0074040	
Туре	7 L	3RT1044	3RT1045	3RT1046	
Size ↑ □		S3			
Dimensions (W x H x D), AC operation	 	70 x 146 x 134			
With mounted auxiliary switch block	-Ko~ mm	70 x 146 x 183			
Dimensions (W x H x D), DC operation	rl, ✓ mm	70 x 146 x 147			
With mounted auxiliary switch block	mm	70 x 146 x 196			
General data					
Permissible mounting position		360° 22,5° 22,	F • • •		
The contactors are designed for operation on a vertical mounting surface.	al	360 22,5 22,	B0_00478		
For DC operation and up to 22.5° inclination in front, the coil operating range is reduced to 0.85 1.1 x $U_{\rm S}$			2		
Upright mounting position					
		- Minnin			
		NSB0_00477a			
-		Special version req	uired.		
Mechanical endurance					
• Basic units	Operating cycles	10 million			
Basic units with snap-on auxiliary switch block	Operating cycles	10 million			
Solid-state compatible auxiliary switch blocks	Operating cycles				
Electrical endurance		1)			
Rated insulation voltage U	V	1000			
(pollution degree 3)					
Rated impulse withstand voltage $m{U}_{\text{imp}}$	kV	6			
Protective separation between the coil and the main cacc. to IEC 60947-1, Appendix N	ontacts V	690			
Mirror contacts					
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact.					
With removable auxiliary switch block		Yes, acc. to IEC 609	947-4-1. Appendi	x F	
With non-removable auxiliary switch block		Acc. to Swiss regula			
Permissible ambient temperature		7100. to owned regula	ationo (66 vi t) on	104000	
•	°C	-25 +60			
During operation					
During storage	°C	-55 +80			
Degree of protection acc. to IEC 60947-1, Appendix	C	IP20			
Connection range				dditional terminal covers)	
Touch protection acc. to EN 50274		Finger-safe only for	vertical contact f	rom the front	
Shock resistance (AC and DC operation)					
Rectangular pulse	<i>g</i> /ms	6.8/5 and 4/10			
• Sine pulse	<i>g</i> /ms	10.6/5 and 6.2/10			
Conductor cross-sections	-	2)			
Short-circuit protection for contactors without of	overload relavs				
Main circuit					
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type	5SE				
according to IEC 60947-4-1/EN 60947-4-1					
Type of coordination "1"	Α	250	250		
Type of coordination "2"	Α	125	160		
• Weld-free ³⁾	Α	63	100		
Auxiliary circuit					
Short-circuit test					
 with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE 	Α	10			
with short-circuit current $I_k = 1$ kA acc. to IEC 60947 • with miniature circuit breakers with C characteristic	-5-1 A	10			
with short-circuit current $I_k = 400 \text{ A}$				4)	
Short-circuit protection for contactors with overload rel	ays	See Configuration N		0	
Short-circuit protection for fuseless load feeders				lotor Starters for Use in the Control	Cabinet" →
		"SIRIUS 3RA1 Load	Feeders"		

For contact endurance of the main contacts, see page 3/83.
 For conductor cross-sections, see page 3/89.
 Test conditions according to IEC 60947-4-1.
 See http://support.automation.siemens.com/WW/view/en/40625241

	3RT1044	3RT1045	3RT1046
	S3	S3	S3
	0.8 1.1 x <i>U</i> _s		
VA	218	270	
VA	0.61 21 0.26	0.68 22 0.27	
VA	247/211	298/274	
VA	0.62/0.57 25/18 0.27/0.3	0.7/0.62 27/20 0.29/0.31	
VA	218	270	
\ /Δ			
V / (0.26	0.27	
VA	232	300	
VΑ			
V / (0.28	0.29	
W	15	15	
)			
mA	, ,)	
mA	$< 43 \text{ mA x } (24 \text{ V/}U_{\text{S}})$		
1110	10 10	10 20	
ms	90 230	90 230	
ms	14 20	14 20	
ms	10 15	10 15	
ms ms	18 34 11 18	18 30 11 23	
ms ms	100 120 16 20	100 120 16 20	
	VA V	VA 218 0.61 VA 21 0.26 VA 247/211 0.62/0.57 VA 25/18 0.27/0.3 VA 218 0.61 VA 21 0.26 VA 21 0.26 VA 21 0.26 VA 232 0.55 VA 20 0.28 VA 15 VA 25 mA × (230 V/U _s mA < 43 mA × (24 V/U _s) MS 16 57 ms 10 19 ms 90 230 ms 14 20 ms 10 15 VA ms 11 18 ms 100 120	VA 218 22 22 0.26 0.27 0.662 27/20 0.27 0.662 27/20 0.27 0.662 27/20 0.27 0.662 27/20 0.27 0.662 27/20 0.27/0.3 0.29/0.31 0.61 0.68 21 22 0.26 0.27 0.27 0.26 0.27 0.26 0.27 0.26 0.27 0.26 0.27 0.26 0.27 0.26 0.27 0.26 0.27 0.28 0.29 0.55 0.52 0.29 0.28 0.29 0.29 0.28 0.29 0.29 0.29 0.29 0.29 0.29 0.29 0.29

 $^{^{1)}}$ For DC operation and up to 22.5° inclination in front, the coil operating range is reduced to 0.85 ... 1.1 x $U_{\rm S}$ (see also permissible mounting position, page 3/85).

²⁾ The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (varistor +2 ms to 5 ms, diode assembly: 2 to 6 times).



Туре		3RT1044	3RT1045	3RT1046
Size		S3	S3	S3
Main circuit				
Load rating with AC				
Utilization category AC-1 Switching resistive loads				
 Rated operational currents I_e 				
- At 40 °C up to 690 V - At 40 °C up to 1 000 V	A A	100 50	120 60	120 70
- At 60 °C up to 690 V - At 60 °C up to 1 000 V	A A	90 40	100 50	100 60
 Rated power for AC loads¹⁾ with p.f. = 0.95 (at 60 °C) 				
- At 230 V - At 400 V - At 500 V - At 690 V - At 1 000 V	kW kW kW kW	34 59 74 102 66	38 66 82 114 82	38 66 82 114 98
$ullet$ Minimum conductor cross-section for loads with $I_{ m e}$				
- At 40 °C - At 60 °C	mm ² mm ²	35 35	50 35	50 35
Utilization categories AC-2 and AC-3				
 Rated operational currents I_e 				
- Up to 500 V - At 690 V - At 1 000 V	A A A	65 47 25	80 58 30	95 58 30
 Rated power for slipring or squirrel-cage motors at 50 and 60 Hz 				
- At 230 V - At 400 V - At 500 V - At 690 V - At 1 000 V	kW kW kW kW	18.5 30 37 45 30	22 37 45 55 37	22 45 55 55 37
Thermal load capacity, 10 s current ²⁾	А	600	760	760
Power loss per conducting path at I_e /AC-3	W	4.6	7.7	10.8
Utilization category AC-4 (for $I_a = 6 \times I_e$)				
Maximum values:				
 Rated operational current I_e 				
- Up to 400 V	Α	55	66	80
 Rated power for squirrel-cage motors with 50 Hz and 60 Hz 				
- At 400 V	kW	30	37	45
The following applies to a contact endurance of about 200 000 operating cycles:				
 Rated operational currents I_e 				
- Up to 400 V - Up to 690 V	A A	28 20	34 22	42 27
Rated power for squirrel-cage motors with 50 Hz and 60 Hz				
- At 230 V - At 400 V - At 690 V	kW kW kW	8.7 15.1 18.6	10.4 17.9 21.1	12 22 25.4

¹⁾ Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account)

account).

2) According to IEC 60947-4-1.
Rated values for various start-up conditions, see Chapter 7,
"Protection Equipment" → "Overload Relays".

			_	_
Туре		3RT1044	3RT1045	3RT1046
Size		S3	S3	S3
Main circuit				
Load rating with DC				
Utilization category DC-1, switching resistive loads ($L/R \le 1$ ms)				
 Rated operational currents I_e (at 60 °C) 				
- 1 conducting path	Up to 24 V A 60 V A 110 V A	90 23 4.5	100 60 9	100 60 9
	220 V A 440 V A 600 V A	1 0.4 0.26	2 0.6 0.4	2 0.6 0.4
- 2 conducting paths in series	Up to 24 V A 60 V A 110 V A	90 90 90	100 100 100	100 100 100
	220 V A 440 V A 600 V A	5 1 0.8	10 1.8 1	10 1.8 1
- 3 conducting paths in series	Up to 24 V A 60 V A 110 V A	90 90 90	100 100 100	100 100 100
	220 V A 440 V A 600 V A	70 2.9 1.4	80 1.8 1	80 4.5 2.6
Utilization category DC-3/DC-5,				
shunt-wound and series-wound motors (<i>L/R</i> ≤	15 ms)			
• Rated operational currents I_e (at 60 °C)		40	10	40
- 1 conducting path	Up to 24 V A 60 V A 110 V A	40 6 2.5	40 6.5 2.5	40 6.5 2.5
	220 V A 440 V A 600 V A	1 0.15 0.06	1 0.15 0.06	1 0.15 0.06
- 2 conducting paths in series	Up to 24 V A 60 V A 110 V A	90 90 90	100 100 100	100 100 100
	220 V A 440 V A 600 V A	7 0.42 0.16	7 0.42 0.16	7 0.42 0.16
- 3 conducting paths in series	Up to 24 V A 60 V A 110 V A	90 90 90	100 100 100	100 100 100
	220 V A 440 V A 600 V A	35 0.8 0.35	35 0.8 0.35	35 0.8 0.35
Switching frequency				
Switching frequency z in operating cycles/hour				
Contactors without overload relays				
No-load switching frequency AC	h ⁻¹	5 000		
 No-load switching frequency DC 	h ⁻¹	1 000		
• Switching frequency z during rated operation ¹⁾				
- I _e /AC-1	At 400 V h ⁻¹	1 000	900	900
- I _o /AC-2 - I _o /AC-3 - I _o /AC-4	At 400 V h ⁻¹ At 400 V h ⁻¹ At 400 V h ⁻¹	400 1 000 300	400 1000 300	350 850 250
Contactors with overload relays				
Mean value	h ⁻¹	15		

¹⁾ Dependence of the switching frequency z' on the operational current I' and operational voltage U: $z' = z \times (I_e/I') \times (400 \text{ V/U}')^{1.5} \times 1/\text{h}$



Type			3RT104.
Size			S3
	ctor cross-sections		
Main con	iductors inductors can be connected)		Screw terminals
Box termi	,		
DOX (EIIIII	Terminal screws		
	- Tightening torque	Nm	4 6
		lb.in	36 53
Front clar	mping point connected		
	Finely stranded with end sleeve Finely stranded without and sleeve	mm²	2.5 35
00477	Finely stranded without end sleeveStranded	mm² mm²	10 50 10 70
	• Solid	mm²	2.5 16
z	 AWG cables, solid or stranded 	AWG	10 2/0
	Ribbon cable conductors	mm	6 x 9 x 0.8
D '	(Number x Width x Thickness)		
Hear clan	nping point connected	2	0.5
1 3	 Finely stranded with end sleeve Finely stranded without end sleeve 	mm² mm²	2.5 50 10 50
	 Stranded 	mm²	10 70
S as	• Solid	mm²	2.5 16
	AWG cables, solid or stranded	AWG	10 2/0
	 Ribbon cable conductors (Number x Width x Thickness) 	mm	6 x 9 x 0.8
Both clarr	nping points connected		
	Finely stranded with end sleeve Finely stranded without and sleeve	mm²	2 x (2.5 35)
184	Finely stranded without end sleeveStranded	mm² mm²	2 x (10 35) 2 x (10 50)
	• Solid	mm²	2 x (2.5 16)
N S	 AWG cables, solid or stranded 	AWG	2 x (10 1/0)
	 Ribbon cable conductors (Number x Width x Thickness) 	mm	2 x (6 x 9 x 0.8)
Busbar co	onnection (bored copper bars)1)		
	Connecting bar (max. width)	mm	10
Cable lug	connection (without box terminals) ²⁾		
	Finely stranded with cable lug	mm²	10 50 ³⁾
	Stranded with cable lug	mm ²	10 70 ³⁾
	AWG cables, solid or stranded Terminal carrying	AWG	7 1/0 M6
Auvilians	Terminal screws conductors		IVIO
Auxiliary	• Solid	mm²	2 × (0.5 1.5) ⁴⁾ · 2 × (0.75 2.5) ⁴⁾ · may 2 × (0.75 4)
	Finely stranded with end sleeve	mm²	$2 \times (0.5 \dots 1.5)^4$; $2 \times (0.75 \dots 2.5)^4$; max. $2 \times (0.75 \dots 4)$ $2 \times (0.5 \dots 1.5)^4$; $2 \times (0.75 \dots 2.5)^4$
	AWG cables, solid or stranded	AWG	2 x (20 16) ⁴⁾ ; 2 x (18 14) ⁴⁾ ; 1 x 12
	Terminal screws		M3
	- Tightening torque	Nm Ib.in	0.8 1.2 7 10.3
Auxiliary	conductors ⁵⁾		Spring-type terminals
	 Operating devices⁶⁾ 		3.0 x 0.5; 3.5 x 0.5
	• Solid	mm²	2 x (0.25 2.5)
	 Finely stranded with end sleeve 	mm²	2 x (0.25 1.5)
	Finely stranded without end sleeveAWG cables, solid or stranded	mm² AWG	2 x (0.25 2.5) 2 x (24 14)
	J. Jabioo, cond of characa	, u	- · · (- · · · · ·)

- 1) If bars larger than 12 mm x 10 mm are connected, a 3RT1946-4EA1 terminal cover is needed to comply with the phase clearance.
- When connecting conductors which are larger than 25 mm², the 3RT1946-4EA1 terminal cover must be used to keep the phase clearance.
- $^{\rm 3)}$ Only with crimped cable lugs according to DIN 46234, max. 20 mm wide.
- 4) If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.
- 5) Max. external diameter of the cable insulation: 3.6 mm. An "insulation stop" must be used for conductor cross-sections ≤ 1 mm²; see "Accessories" on page 3/122.
- 6) Tool for opening the spring-type terminals; see "Accessories", page 3/122.

Туре	<u></u>	3RT1054	3RT1055, 3RT1056	3RT1064, 3RT1065, 3RT1066	3RT1075	3RT1076
Size		S6		S10	S12	
Dimensions (W x H x D)	, mm −	120 x 172 >	k 170	145 x 210 x 202	160 x 214	x 225
With mounted auxiliary switch block	, o` mm	120 x 172 >	x 217	145 x 210 x 251	160 x 214	x 271
General data						
Permissible mounting position		*	22,5° ₊ 22,5°	18a		
The contactors are designed for operation on a vertical mounting surface.		90° 11 5	900	NSBO_006		
Mechanical endurance	Opera- ting cycles	10 million				
Electrical endurance		1)				
Rated insulation voltage <i>U</i> _i (pollution degree 3)	V	1 000				
Rated impulse withstand voltage $U_{\rm imp}$	kV	8				
Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N	V	690				
Mirror contacts		Yes, acc. to	IEC 60947-	4-1, Appendix F		
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact.						
Permissible ambient temperature						
During operation	°C	-25 +60				
During operation, with AS-Interface interface	°C	-25 +55				
During storage	°C	-55 +80				
Degree of protection acc. to IEC 60947-1, Appendix C		IP00/open	(where applic	cable, use additiona	I terminal cov	ers)
Touch protection acc. to EN 50274		Finger-safe	only for vert	ical contact from the	front	
Shock resistance						
Rectangular pulse	<i>g</i> /ms	8.5/5 and 4				
• Sine pulse	<i>g</i> /ms	13.4/5 and	6.5/10			
Conductor cross-sections		2)				
Electromagnetic compatibility (EMC) Short-circuit protection		3)				
Main circuit						
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1						
Type of coordination "1"	Α	355	355	500	630	630
Type of coordination "2"	Α	315	315	400	500	500
• Weld-free ⁴⁾	Α	80	160	250	250	315
Auxiliary circuit						
Short-circuit test						
 with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current I_k = 1 kA acc. to IEC 60947-5-1 	Α	10				
• with miniature circuit breakers with C characteristic with short-circuit current $I_{\rm k}$ = 400 A	Α	10				
Short-circuit protection for contactors with overload relays		See Config	uration Manu	ual "Configuring SIRI	US" ⁵⁾	

¹⁾ For contact endurance of the main contacts, see page 3/84.

For conductor cross-sections, see page 3/94.
 For electromagnetic compatibility (EMC), see page 3/80.
 Test conditions according to IEC 60947-4-1.
 See http://support.automation.siemens.com/WW/view/en/40625241

Type Size		3RT105. S6	3RT106. S10	3RT107. S12
Control			-	
Operating range of the solenoid AC/DC (UC)		0.8 x <i>U</i> _{s min} 1.1	I x U _{s max}	
Power consumption of the solenoid operation (when coil is cold and rated range $U_{\rm Smin}\dots U_{\rm Smax}$)				
Conventional operating mechanisms				
AC operation				
- Closing at $U_{\rm Smin}$ - Closing at $U_{\rm Smax}$ - Closed at $U_{\rm Smin}$ - Closed at $U_{\rm Smax}$	VA/p.f. VA/p.f. VA/p.f. VA/p.f.	250/0.9 300/0.9 4.8/0.8 5.8/0.8	490/0.9 590/0.9 5.6/0.9 6.7/0.9	700/0.9 830/0.9 7.6/0.9 9.2/0.9
DC operation				
- Closing at $U_{\rm Smin}$ - Closing at $U_{\rm Smax}$ - Closed at $U_{\rm Smin}$ - Closed at $U_{\rm Smax}$	W W W	300 360 4.3 5.2	540 650 6.1 7.4	770 920 8.5 10
Solid-state operating mechanisms				
AC operation				
- Closing at $U_{\rm Smin}$ - Closing at $U_{\rm Smax}$ - Closed at $U_{\rm Smin}$ - Closed at $U_{\rm Smax}$	VA/p.f. VA/p.f. VA/p.f. VA/p.f.	190/0.8 280/0.8 3.5/0.5 4.4/0.4	400/0.8 530/0.8 4/0.5 5/0.4	560/0.8 750/0.8 5.4/0.8 7/0.8
DC operation				
- Closing at $U_{\rm Smin}$ - Closing at $U_{\rm Smax}$ - Closed at $U_{\rm Smin}$ - Closed at $U_{\rm Smax}$	W W W	250 320 2.3 2.8	440 580 3.2 3.8	600 800 4 5
PLC control input acc. to IEC 61131-2		Type 2		
Rated voltage	V DC	24		
Operating range	V DC	17 30		
Power consumption	mA	≤ 30		
Operating times (Total break time = Opening delay + Arcing time)				
Conventional operating mechanisms				
• For 0.8 x $U_{\text{S min}}$ 1.1 x $U_{\text{S max}}$ - Closing delay	ms	20 95	30 95	45 100
- Opening delay	ms	40 60	40 80	60 100
 For U_{s min} U_{s max} Closing delay Opening delay 	ms ms	25 50 40 60	35 50 50 80	50 70 70 100
Solid-state operating mechanism, actuated via A1/A2	1110	10 00	50 60	70 100
• For 0.8 x $U_{\text{s min}}$ 1.1 x $U_{\text{s max}}$				
- Closing delay - Opening delay	ms ms	95 135 80 90	105 145 80 100	120 150 80 100
• For $U_{\text{s min}} \dots U_{\text{s max}}$				
- Closing delay - Opening delay	ms ms	100 120 80 90	110 130 80 100	125 150 80 100
Solid-state operating mechanism, actuated via PLC input				
• For 0.8 x $U_{\rm S \; min} \ldots 1.1 \; {\rm x} \; U_{\rm S \; max}$				
- Closing delay - Opening delay	ms ms	35 75 80 90	45 80 80 100	60 90 80 100
• For $U_{\text{s min}} \dots U_{\text{s max}}$				
- Closing delay - Opening delay	ms ms	40 60 80 90	50 65 80 100	65 80 80 100
Arcing time	ms	10 15	10 15	10 15

Type Size		3RT1054 S6	3RT1055 S6	3RT1056 S6	3RT1064 S10	3RT1065 S10	3RT1066 S10	3RT1075 S12	3RT1076 S12
Main circuit									
Load rating with AC		•							
Utilization category AC-1 Switching resistive loads									
 Rated operational currents I_e 									
- At 40 °C up to 690 V - At 60 °C up to 690 V - At 60 °C up to 1 000 V	A A A	160 140 80	185 160 90	215 185 100	275 250 100	330 300 150		430 400 200	610 550 200
 Rated power for AC loads¹⁾ with p.f. = 0.95 (at 60 °C) 									
- At 230 V - At 400 V - At 500 V - At 690 V - At 1 000 V	kW kW kW kW	53 92 115 159 131	60 105 131 181 148	70 121 152 210 165	94 164 205 283 164	113 197 246 340 246		151 263 329 454 329	208 362 452 624 329
\bullet Minimum conductor cross-section for loads with $I_{\rm e}$									
- At 40 °C - At 60 °C	mm ² mm ²	70 50	95 70	95 95	150 120	185 185		2 x 150 240	2 x 185 2 x 185
Utilization categories AC-2 and AC-3									
 Rated operational currents I_e 									
- Up to 500 V - At 690 V - At 1 000 V	A A A	115 115 53	150 150 65	185 170 65	225 225 68	265 265 95	300 280 95	400 400 180	500 450 180
 Rated power for slipring or squirrel-cage motors at 50 and 60 Hz 									
- At 230 V - At 400 V - At 500 V - At 690 V - At 1 000 V	kW kW kW kW	37 64 81 113 75	50 84 105 146 90	61 104 132 167 90	73 128 160 223 90	85 151 189 265 132	97 171 215 280 132	132 231 291 400 250	164 291 363 453 250
Thermal load capacity, 10 s current ²⁾	Α	1 100	1 300	1 480	1 800	2 400	2 400	3 200	4 000
Power loss per main conducting path at I_e /AC-3/500 V	W	7	9	13	17	18	22	35	55
Utilization category AC-4 (for $I_a = 6 \times I_e$)									
Maximum values:									
 Rated operational current I_e 									
- Up to 400 V	Α	97	132	160	195	230	280	350	430
 Rated power for squirrel-cage motors with 50 Hz and 60 Hz 									
- At 400 V	kW	55	75	90	110	132	160	200	250
The following applies to a contact endurance of about 200 000 operating cycles:									
 Rated operational currents I_e 									
- Up to 500 V - Up to 690 V	A A	54 48	68 57	81 65	96 85	117 105	125 115	150 135	175 150
 Rated power for squirrel-cage motors with 50 Hz and 60 Hz 									
- At 230 V - At 400 V - At 500 V - At 690 V	kW kW kW	16 29 37 48	20 38 47 55	25 45 57 65	30 54 67 82	37 66 82 102	40 71 87 112	48 85 105 133	56 98 123 148

Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).

²⁾ According to IEC 60947-4-1.

Rated values for various start-up conditions, see Chapter 7,

"Protection Equipment" → "Overload Relays".

Type Size		3RT1054 S6	3RT1055 S6	3RT1056 S6	3RT1064 S10	3RT1065 S10	3RT1066 S10	3RT1075 S12	3RT1076 S12
Main circuit									
Load rating with DC									
Utilization category DC-1, switching resistive loads (L/R ≤ 1 ms)									
 Rated operational currents I_e (at 60 °C) 1 conducting path 	Up to 24 V A	160			200	300		400	
- 1 conducting path	60 V A	160			200	300		330	
	110 V A	18			18	33		33	
	220 V A 440 V A	3.4 0.8			3.4 0.8	3.8 0.9		3.8 0.9	
	600 V A	0.5			0.5	0.6		0.6	
- 2 conducting paths in series	Up to 24 V A	160			200	300		400	
	60 V A 110 V A	160 160			200 200	300 300		400 400	
	220 V A	20			20	300		400	
	440 V A	3.2			3.2	4		4	
	600 V A	1.6			1.6	2		2	
- 3 conducting paths in series	Up to 24 V A 60 V A	160 160			200 200	300 300		400 400	
	110 V A	160			200	300		400	
	220 V A	160			200	300		400	
	440 V A 600 V A	11.5 4			11.5 4	11 5.2		11 5.2	
Utilization category DC-3/DC-5, shunt-wound and series-wound motors (
• Rated operational currents I _e (at 60 °C)	-								
- 1 conducting path	Up to 24 V A	160			200	300		400	
	60 V A 110 V A	7.5 2.5			7.5 2.5	11 3		11 3	
	220 V A	0.6			0.6	0.6		0.6	
	440 V A	0.17			0.17	0.18		0.18	
2 conducting paths in sories	600 V A Up to 24 V A	0.12 160			0.12 200	0.125 300		0.125 400	
- 2 conducting paths in series	60 V A	160			200	300		400	
	110 V A	160			200	300		400	
	220 V A 440 V A	2.5 0.65			2.5 0.65	2.5 0.65		2.5 0.65	
	600 V A	0.37			0.37	0.37		0.37	
- 3 conducting paths in series	Up to 24 V A	160			200	300		400	
	60 V A 110 V A	160 160			200 200	300 300		400 400	
	220 V A	160			200	300		400	
	440 V A	1.4			1.4	1.4		1.4	
Switching frequency	600 V A	0.75			0.75	0.75		0.75	
Switching frequency z in operating cycles	s/hour								
Contactors without overload relays	711001								
No-load switching frequency	h ⁻¹	2 000							
Switching frequency z during rated opera									
- <i>I_e</i> /AC-1	At 400 V h ⁻¹	800	800		750	800	750	700	500
- I _e /AC-2 - I _e /AC-3	At 400 V h ⁻¹ At 400 V h ⁻¹	400 1 000	300 750		250	300 700	250	200	170 420
- I _e /AC-3 - I _e /AC-4	At 400 V h ⁻¹	130	130		500 130	130	500 130	500 130	130
Contactors with overload relays									
Mean value	h ⁻¹	60							

¹⁾ Dependence of the switching frequency z' on the operational current I' and operational voltage U: $z' = z \times (I_0/I') \times (400 \text{ V/U'})^{1.5} \times 1/\text{h}$

Type Size			3RT105. S6		3RT106. S10	3RT107. S12
Conduct	or cross-sections					
Main cond (1 or 2 con	ductors aductors can be connected)		Screw terminals			
With moun	ted box terminals	Type	3RT1955-4G (55 kW)	3RT1956-4G	3RT1966-40	3
	 Terminal screws 		M10 (hexagon socket,	M10 (hexagon socket,	M12 (hexag	jon socket,
	- Tightening torque	Nm lb.in	A/F 4) 10 12 90 110	A/F 4) 10 12 90 110	A/F 5) 20 22 180 195	
Front clam	ping point connected					
00479	Finely stranded with end sleeveFinely stranded without end sleeveStranded	mm² mm² mm²	16 70 16 70 16 70	16 120 16 120 16 120	70 240 70 240 95 300	
	 AWG cables, solid or stranded 	AWG	6 2/0	6 250 kcmil	3/0 600 k	cmil
	 Ribbon cable conductors (Number x Width x Thickness) 	mm	min. 3 x 9 x 0.8, max. 6 x 15.5 x 0.8	Min. 3 x 9 x 0.8, max. 10 x 15.5 x 0.8	Min. 6 x 9 x max. 20 x 2	
Rear clam	ping point connected					
80_00480	Finely stranded with end sleeveFinely stranded without end sleeveStranded	mm² mm² mm²	16 70 16 70 16 70	16 120 16 120 16 120	120 185 120 185 120 240	
	 AWG cables, solid or stranded 	AWG	6 2/0	6 250 kcmil	250 500	kcmil
	 Ribbon cable conductors (Number x Width x Thickness) 	mm	Min. 3 x 9 x 0.8, max. 6 x 15.5 x 0.8	Min. 3 x 9 x 0.8, max. 10 x 15.5 x 0.8	Min. 6 x 9 x max. 20 x 2	
Both clam	oing points connected ¹⁾					
0481	Finely stranded with end sleeveFinely stranded without end sleeveStranded	mm² mm² mm²	Max. 1 x 50, 1 x 70 Max. 1 x 50, 1 x 70 Max. 1 x 50, 1 x 70	Max. 1 x 95, 1 x 120 Max. 1 x 95, 1 x 120 Max. 1 x 95, 1 x 120	Min. 2 x 50,	max. 2 x 185 max. 2 x 185 max. 2 x 240
NSB0 0	 AWG cables, solid or stranded 	AWG	Max. 2 x 1/0	Max. 2 x 3/0	Min. 2 x 2/0 max. 2 x 50	
	 Ribbon cable conductors (Number x Width x Thickness) 	mm	Max. 2 x (6 x 15.5 x 0.8)	Max. 2 x (10 x 15.5 x 0.8)	Max. 2 x (20	0 x 24 x 0.5)
Busbar co						
	Connecting bar (max. width)	mm	17		25	
Cable lug	connection (without box terminals)	2				
	 Finely stranded with cable lug²⁾³⁾ Stranded with cable lug²⁾³⁾ 	mm ² mm ²	16 95 25 120		50 240 70 240	
	AWG cables, solid or stranded Tamping I approve	AWG	4 250 kcmil		2/0 500 k	
	Terminal screwsTightening torque	Nm lb.in	M8 x 25 (A/F 13) 10 14 90 124		M10 x 30 (A 14 24 124 210	VF 17)
Auxiliary o	conductors					
	SolidFinely stranded with end sleeve	mm ² mm ²	$2 \times (0.5 \dots 1.5)^{4}$; $2 \times (0.75 \times (0.75 \times (0.5 \dots 1.5)^{4})$; $2 \times (0.75 \times ($	2.5) ⁴⁾ ; max. 2 x (0.75 4) 2.5) ⁴⁾		
	 AWG cables, solid or stranded 	AWG	2 x (18 14)			
	Terminal screwsTightening torque	Nm lb.in	M3 (Pozidriv size 2) 0.8 1.2 7 10.3			
Auxiliary	conductors ⁵⁾		Spring-type termina	Is		
	 Operating devices⁶⁾ 		3.0 x 0.5; 3.5 x 0.5			
	 Solid Finely stranded with end sleeve Finely stranded without end sleeve AWG cables, solid or stranded 	mm ² mm ²	2 × (0.25 2.5) 2 × (0.25 1.5) 2 × (0.25 2.5) 2 × (24 14)			

- 1) Minimum cross-section 16 mm².
- 2) 3RT105.: When connecting cable lugs to DIN 46235, use 3RT1956-4EA1 terminal cover for conductor cross-sections of 95 mm² and more to ensure phase spacing.
- 3) 3RT106. and 3RT107.: When connecting cable lugs to DIN 46234, the 3RT1966-4EA1 terminal cover must be used for conductor cross-sections of 240 mm² and more as well as DIN 46235 for conductor cross-sections of 185 mm² and more to keep the phase clearance.
- 4) If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.
- 5) Max. external diameter of the cable insulation: 3.6 mm. An "insulation stop" must be used for conductor cross-sections ≤ 1 mm²; see "Accessories" on page 3/122.
- 6) Tool for opening the spring-type terminals; see "Accessories", page 3/122.



SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

Size		S3 to S12 Screw termina spring-type to		S3 to S12 Screw terminals and spring-type terminals
		Snap-on auxiliary switch (1- and 4-pole	h block	Laterally mountable auxiliary switch block
® and ® rated data of the auxiliary contacts				
Rated voltage	V AC	600		600
Switching capacity		A 600, Q 600		A 300, Q 300
Uninterrupted current at 240 V AC	А	10		10
			_	
Type Size		3RT1044 S3	3RT1045 S3	3RT1046 S3
® and ® rated data				
Rated insulation voltage	V AC	600		
Uninterrupted current, at 40 °C, open and enclosed	А	90	105	105
Maximum horsepower ratings (from ⑤ and ⑥ approved values)				
Rated power for three-phase motors at 60 Hz				
- At 200 V	hp	20	25	30
- At 230 V	hp	25	30	30
- At 460 V - At 575 V	hp hp	50 60	60 75	75 100
Short-circuit protection ¹⁾	1.			
At 600 V (contactor or overload relay)	kA	10	10	10
CLASS RK5 fuse	А	250	300	350
Circuit breakers with overload protection acc. to UL 489	Α	250	300	400
Combination motor controllers type E according to UL 508 and UL 60947-4-1				
- At 480 V	Туре	3RV104		
	A kA	63 65	75 65	100 65

kΑ

3RV104

3RU114

18 ... 100

63 30

75 30

75 30

Туре

Туре

For the dimensioning of load feeders, see also the UL guide "Industrial Control Panels for North America", www.siemens.com/sirius/ul-download.

- At 600 V

Overload relays

• Setting range

¹⁾ For more information about short-circuit values, e.g. for protection against short-circuit currents, see the UL reports on the individual devices, www.siemens.com/sirius/manuals.

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

Type Size		3RT1054 S6	3RT1055 S6	3RT1056 S6	3RT1064 S10	3RT1065 S10	3RT1066 S10
⊕ and ⊕ rated data							
Rated insulation voltage	V AC	600			600		
Uninterrupted current, at 40 °C, open and enclosed	А	140	195	195	250	330	330
Maximum horsepower ratings (from 3 and 4 approved values)							
 Rated power for three-phase motors at 60 Hz 							
- At 200 V - At 230 V - At 460 V - At 575 V	hp hp hp hp	40 50 100 125	50 60 125 150	60 75 150 200	60 75 150 200	75 100 200 250	100 125 250 300
Short-circuit protection ¹⁾							
• At 600 V	kA	10	10	10	10	18	18
CLASS RK5/L fuse	Α	450	500	500	700	800	800
Circuit breakers with overload protection acc. to UL 489	Α	350	450	500	500	700	800
Overload relays	Туре	3RB2056			3RB2066		

Type Size		3RT1075 S12	3RT1076 S12
⊕ and ⊕ rated data			
Rated insulation voltage	V AC	600	
Uninterrupted current, at 40 °C, open and enclosed	А	400	540
Maximum horsepower ratings (from ® and ® approved values)			
 Rated power for three-phase motors at 60 Hz 			
- At 200 V - At 230 V - At 460 V - At 575 V	hp hp hp hp	125 150 300 400	150 200 400 500
Short-circuit protection ¹⁾			
• At 600 V	kA	18	30
CLASS RK5/L fuse	Α	1000	1200
Circuit breakers with overload protection acc. to UL 489	Α	900	900
Overload relays	Type	3RB2066	

¹⁾ For more information about short-circuit values, e.g. for protection against short-circuit currents, see the UL reports on the individual devices, www.siemens.com/sirius/manuals.

For the dimensioning of load feeders, see also the UL guide "Industrial Control Panels for North America", www.siemens.com/sirius/ul-download.



info@abn.by

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

Selection and ordering data

AC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit = 41B







3RT104.-1A.00

3RT104.-3A.00

3RT104.-1A.04

Rated data			Auxiliary co	ontacts	Rated control	DT	Screw terminals	(1)	DT	Spring-type terminals	
AC-2 and AC-3 $T_{\rm u}$: Up to 60 °C		AC-1, <i>T</i> _u : 40 °C			supply voltage U _s at 50 Hz					for coil terminals	Ш
tional thre current I_e mot	e-phase ors at Iz and	Operational current <i>I</i> _e up to 690 V	Ident. No.	Version L NO NC	V AC		Article No.	Price per PU		Article No.	Price per PU

For screw fixing and snap-on mounting onto TH 35 and TH 75 standard mounting rail

65	30	100	 	 24 110 230	⇒ 3RT1044-1AB00⇒ 3RT1044-1AF00⇒ 3RT1044-1AP00	В	3RT1044-3AB00 3RT1044-3AF00 3RT1044-3AP00
80	37	120	 	 24 110 230	> 3RT1045-1AB00 > 3RT1045-1AF00 > 3RT1045-1AP00	В	3RT1045-3AB00 3RT1045-3AF00 3RT1045-3AP00
95	45	120	 	 24 110 230	> 3RT1046-1AB00 > 3RT1046-1AF00 > 3RT1046-1AP00	B	3RT1046-3AB00 3RT1046-3AF00 3RT1046-3AP00

With mounted auxiliary switch block (removable)²⁾

65	30	100	22	2	2	24 110 230	> > >	3RT1044-1AB04 3RT1044-1AF04 3RT1044-1AP04	
80	37	120	22	2	2	24 110 230	B	3RT1045-1AB04 3RT1045-1AF04 3RT1045-1AP04	
95	45	120	22	2	2	24 110 230	B	3RT1046-1AB04 3RT1046-1AF04 3RT1046-1AP04	

With permanently mounted auxiliary switch block for safety applications according to SUVA

65	30	100	22	2	2	230	■ 3RT1044-1AP04-3MA0	
80	37	120	22	2	2	230	B 3RT1045-1AP04-3MA0	
95	45	120	22	2	2	230	► 3RT1046-1AP04-3MA0	

Other voltages according to page 3/102 on request. For accessories, see page 3/114. For spare parts, see page 3/123.

 $^{^{\}rm 1)}$ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

 $^{^{2)}}$ Article number for the auxiliary switch block (removable): 3RH1921-1HA22 (2 NO + 2 NC acc. to EN 50012; Ident. No. 22).

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

DC operation

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B







3RT104.-1B.40

3RT104.-3B.40

3RT104.-1B.44

Rated data		Auxiliary co	ontacts	Rated control [Screw terminals	4	DT	Spring-type terminals	∞
AC-2 and AC-3, T _u : Up to 60 °C	AC-1, T _u : 40 °C			supply voltage U _s					for coil terminals	
Operational three-phase current I_e up to A Rating 1) of three-phase motors at 50 Hz and 500 V A KW	Operational current <i>I</i> _e up to 690 V	Ident. No.	Version	V DC		Article No.	Price per PU		Article No.	Price per PU

For screw fixing and snap-on mounting onto TH 35 and TH 75 standard mounting rail

Size S3

65	30	100	 	 24 220	3RT1044-1BB40 B 3RT1044-1BM40	► B	3RT1044-3BB40 3RT1044-3BM40
80	37	120	 	 24 220	B 3RT1045-1BB40 3RT1045-1BM40	B	3RT1045-3BB40 3RT1045-3BM40
95	45	120	 	 24 220	► 3RT1046-1BB40 B 3RT1046-1BM40	▶ B	3RT1046-3BB40 3RT1046-3BM40

With mounted auxiliary switch block (removable)2)

65	30	100	22	2	2	24 220	► B	3RT1044-1BB44 3RT1044-1BM44	-
80	37	120	22	2	2	24 220	▶ B	3RT1045-1BB44 3RT1045-1BM44	
95	45	120	22	2	2	24 220	▶ B	3RT1046-1BB44 3RT1046-1BM44	

With permanently mounted auxiliary switch block for safety applications according to SUVA

	.2/11 . 4/1	2 10/10/14 122 1	02 111						
65	30	100	22	2	2	24	>	3RT1044-1BB44-3MA0	
80	37	120	22	2	2	24	•	3RT1045-1BB44-3MA0	
95	45	120	22	2	2	24		3RT1046-1BB44-3MA0	

Other voltages according to page 3/102 on request.

For accessories, see page 3/114.

For spare parts, see page 3/123.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

²⁾ Article number for the auxiliary switch block (removable): 3RH1921-1HA22 (2 NO + 2 NC acc. to EN 50012; Ident. No. 22).

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

UC operating mechanism · AC/DC operation (50/60 Hz and DC)

- Withdrawable coils with integrated coil switch (varistor)
- Auxiliary and control conductors: Screw or spring-type terminals
- Main conductors: Busbar connections, for 3RT1054 (55 kW) box terminals¹⁾







Size	Rated data	ı		Auxiliary		DT	Article No.	Price	PU	PS*	PG
	AC-2 and A		AC-1,	contacts, lateral	supply voltage U_s			per PU	(UNIT, SET. M)		
	u - I		<i>T</i> _u : 40 °C		-8				,,		
	Opera-	Ratings ²⁾ of	Opera-	Version							
	tional	three-phase motors	tional								

current I_e current I_e at 50 Hz and up to up to 500 V 230 V 400 V 500 V 690 V 690 V

tional o	porotin	a mook	aniom					
	kW	kW	kW	kW	Α	NO	NC	V AC/D

	А	KW	kW	KVV	KVV	А	NO	NC	V AC/DC						
Con	vention	al operat	ing me	chanisı	ทร										
	- \	1/L1 3/L2 	5/L3 13 	/ //							Screw terminals	+			
S6	115	37	55	75	110	160	2	2	110 127 220 240	>	3RT1054-1AF36 3RT1054-1AP36		1 1	1 unit 1 unit	41B 41B
	150	45	75	90	132	185	2	2	110 127 220 240	>	3RT1055-6AF36 3RT1055-6AP36		1 1	1 unit 1 unit	41B 41B
	185	55	90	110	160	215	2	2	110 127 220 240	>	3RT1056-6AF36 3RT1056-6AP36		1 1	1 unit 1 unit	41B 41B
S10	225	55	110	160	200	275	2	2	110 127 220 240	>	3RT1064-6AF36 3RT1064-6AP36		1 1	1 unit 1 unit	41B 41B
	265	75	132	160	250	330	2	2	110 127 220 240	>	3RT1065-6AF36 3RT1065-6AP36		1 1	1 unit 1 unit	41B 41B
	300	90	160	200	250	330	2	2	110 127 220 240	>	3RT1066-6AF36 3RT1066-6AP36		1 1	1 unit 1 unit	41B 41B
S12	400	132	200	250	400	430	2	2	110 127 220 240	>	3RT1075-6AF36 3RT1075-6AP36		1 1	1 unit 1 unit	41B 41B
	500	160	250	355	400	610	2	2	110 127 220 240	>	3RT1076-6AF36 3RT1076-6AP36		1 1	1 unit 1 unit	41B 41B
) _U	- √	1/L1 3/L2 	//	3 21 31 4 -7 -7 22 32 4							Spring-type terminals for coil and auxiliary switch terminals	8			

) j	A2(-)	2/T1 4/T2	6/T3 14	- 7 - 7 \ 22 32 4	4						for coil and auxiliary switch terminals			
S6	115	37	55	75	110	160	2	2	110 127 220 240	B B	3RT1054-3AF36 3RT1054-3AP36	1 1	1 unit 1 unit	41B 41B
	150	45	75	90	132	185	2	2	110 127 220 240	B B	3RT1055-2AF36 3RT1055-2AP36	1 1	1 unit 1 unit	41B 41B
	185	55	90	110	160	215	2	2	110 127 220 240	B B	3RT1056-2AF36 3RT1056-2AP36	1 1	1 unit 1 unit	41B 41B
S10	225	55	110	160	200	275	2	2	110 127 220 240	B B	3RT1064-2AF36 3RT1064-2AP36	1 1	1 unit 1 unit	41B 41B
	265	75	132	160	250	330	2	2	110 127 220 240	B B	3RT1065-2AF36 3RT1065-2AP36	1 1	1 unit 1 unit	41B 41B
	300	90	160	200	250	330	2	2	110 127 220 240	B B	3RT1066-2AF36 3RT1066-2AP36	1	1 unit 1 unit	41B 41B
S12	400	132	200	250	400	430	2	2	110 127 220 240	B B	3RT1075-2AF36 3RT1075-2AP36	1	1 unit 1 unit	41B 41B
	500	160	250	355	400	610	2	2	110 127 220 240	B B	3RT1076-2AF36 3RT1076-2AP36	1 1	1 unit 1 unit	41B 41B

Other voltages according to page 3/102 on request. For accessories, see page 3/114. For spare parts, see page 3/124.

¹⁾ Alternatively the 3RT1054-1 contactor (55 kW) can be supplied with busbar connections instead of box terminals. Without additional price. In the 8th position of the article number, the "1" must be replaced with "6" for screw terminals, e.g. 3RT1054-6A.36; for spring-type terminals, the "3" must be replaced by "2", e.g. 3RT1054-2A.36.

 $^{^{2)}\,}$ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

UC operating mechanism · AC/DC operation (50/60 Hz and DC)

- Withdrawable coils with integrated coil switch (varistor)
- Auxiliary and control conductors: Screw or spring-type terminals
 Main conductors: Busbar connections, for 3RT1054 (55 kW) box terminals¹⁾







3RT10	5.				3RT106	6.				3RT	Г107.				
Size	Rated data	ı							Rated control	DT	Article No.	Price	PU	PS*	PG
	AC-2 and A T _u : Up to 6					AC-1, T _u : 40 °C	tacts,	lateral	supply voltage $U_{\rm s}$			per PU	(UNIT, SET, M)		
	Opera-	Ratings				Opera-	Version	on							
	tional current I _e up to		hase mo z and	tors		tional current I_e up to	\I	7							
	500 V	230 V	400 V	500 V	690 V	690 V	'	'							
	Α	kW	kW	kW	kW	Α	NO	NC	V AC/DC						
Solid	l-state ope	erating	mechai	nisms ·	for 24	V DC PLC	outp	out							
) <u>"</u> "	A1(+) \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	44	5/L3 13 : 5/T3 14 :	<i>‡-</i> [-/-\							Screw terminals	+			
~~	445	07		7-	440	400	0	_	00 407		ODTAGE A ANTOG			4	440

) <u>n</u>	上 -(//	//	22 32 4							Screw terminals	+			
S6	115	37	55	75	110	160	2	2	96 127 200 277	A	3RT1054-1NF36 3RT1054-1NP36		1 1	1 unit 1 unit	41B 41B
	150	45	75	90	132	185	2	2	96 127 200 277	A	3RT1055-6NF36 3RT1055-6NP36		1	1 unit 1 unit	41B 41B
	185	55	90	110	160	215	2	2	96 127 200 277	A	3RT1056-6NF36 3RT1056-6NP36		1	1 unit 1 unit	41B 41B
S10	225	55	110	160	200	275	2	2	96 127 200 277	A A	3RT1064-6NF36 3RT1064-6NP36		1 1	1 unit 1 unit	41B 41B
	265	75	132	160	250	330	2	2	96 127 200 277	A A	3RT1065-6NF36 3RT1065-6NP36		1	1 unit 1 unit	41B 41B
	300	90	160	200	250	330	2	2	96 127 200 277	B A	3RT1066-6NF36 3RT1066-6NP36		1	1 unit 1 unit	41B 41B
S12	400	132	200	250	400	430	2	2	96 127 200 277	A A	3RT1075-6NF36 3RT1075-6NP36		1	1 unit 1 unit	41B 41B
	500	160	250	355	400	610	2	2	96 127 200 277	A A	3RT1076-6NF36 3RT1076-6NP36		1	1 unit 1 unit	41B 41B
) _U	A1(+)	1/L1 3/L2	J ^{5/L3} J ¹³	21 31 4 - 7 - 7	.3						Spring-type terminals for coil and auxiliary	$\stackrel{\circ}{\mathbb{H}}$			

	500	160	250	355	400	610	2	2	96 127 200 277	A A	3RT1076-6NF36 3RT1076-6NP36	1 1	1 unit 1 unit	41B 41B
) _U	A1(+) 1 A2(-) 2		5/L3 13 	21 31 4 -7 7 22 32 4							Spring-type terminals			
S6	115	37	55	75	110	160	2	2	96 127 200 277	B B	3RT1054-3NF36 3RT1054-3NP36	1 1	1 unit 1 unit	41B 41B
	150	45	75	90	132	185	2	2	96 127 200 277	B B	3RT1055-2NF36 3RT1055-2NP36	1 1	1 unit 1 unit	41B 41B
	185	55	90	110	160	215	2	2	96 127 200 277	B B	3RT1056-2NF36 3RT1056-2NP36	1 1	1 unit 1 unit	41B 41B
S10	225	55	110	160	200	275	2	2	96 127 200 277	B B	3RT1064-2NF36 3RT1064-2NP36	1 1	1 unit 1 unit	41B 41B
	265	75	132	160	250	330	2	2	96 127 200 277	B B	3RT1065-2NF36 3RT1065-2NP36	1 1	1 unit 1 unit	41B 41B
	300	90	160	200	250	330	2	2	96 127 200 277	B B	3RT1066-2NF36 3RT1066-2NP36	1 1	1 unit 1 unit	41B 41B
S12	400	132	200	250	400	430	2	2	96 127 200 277	B B	3RT1075-2NF36 3RT1075-2NP36	1	1 unit 1 unit	41B 41B
	500	160	250	355	400	610	2	2	96 127 200 277	B B	3RT1076-2NF36 3RT1076-2NP36	1 1	1 unit 1 unit	41B 41B

Other voltages according to page 3/102 on request. For accessories, see page 3/114. For spare parts, see page 3/125.

¹⁾ Alternatively the 3RT1054-1 contactor (55 kW) can be supplied with busbar connections instead of box terminals. Without additional price. In the 8th position of the article number, the "1" must be replaced with "6" for screw terminals, e.g. 3RT1054-6A.36; for spring-type terminals, the "3" must be replaced by "2", e.g. 3RT1054-2A.36.

 $^{^{2)}\,}$ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.



SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

UC operating mechanism · AC/DC operation (50/60 Hz and DC)

- Withdrawable coils with integrated coil switch (varistor)
- Auxiliary and control conductors: Screw terminals
- Main conductors: Busbar connections, for 3RT1054 (55 kW) box terminals¹⁾
- Indication of remaining lifetime (RLT)



3RT1056-6P.

Size	Rated data	а						ary con-		וט	Screw terminals	(1)	PU	PS*	PG
	AC-2 and T _u : Up to 6					AC-1, T _u : 40 °C		, lateral	supply voltage $U_{\rm s}$			_	(UNIT, SET, M)		
	Opera-	Ratings				Opera-	Version	on			Article No.	Price			
	tional current I _e up to	three-p at 50 H	hase mo z and	tors		tional current I_e up to	\	}				per PU			
	500 V	230 V	400 V	500 V	690 V	690 V	l '	1							
	Α	kW	kW	kW	kW	Α	NO	NC	V AC/DC						
Soli	d-state op	erating	mecha	nisms	with 24	4 V DC PL	_C rel	ay outp	out · with RLT						
Pu ^C C	A1(+) 1/1/A2(-) 2/	-44		7											
S6	115	37	55	75	110	160	1	1	96 127 200 277	B B	3RT1054-1PF35 3RT1054-1PP35		1 1	1 unit 1 unit	41B 41B
	150	45	75	90	132	185	1	1	96 127 200 277	B B	3RT1055-6PF35 3RT1055-6PP35		1 1	1 unit 1 unit	41B 41B
	185	55	90	110	160	215	1	1	96 127 200 277	B B	3RT1056-6PF35 3RT1056-6PP35		1 1	1 unit 1 unit	41B 41B
S10	225	55	110	160	200	275	1	1	96 127 200 277	B B	3RT1064-6PF35 3RT1064-6PP35		1 1	1 unit 1 unit	41B 41B
	265	75	132	160	250	330	1	1	96 127 200 277	B B	3RT1065-6PF35 3RT1065-6PP35		1 1	1 unit 1 unit	41B 41B
	300	90	160	200	250	330	1	1	96 127	В	3RT1066-6PF35		1	1 unit	41B

200 ... 277

200 ... 277

96 ... 127

200 ... 277

96 ... 127

В

В

В

В

В

3RT1066-6PP35

3RT1075-6PF35

3RT1075-6PP35

3RT1076-6PF35

3RT1076-6PP35

Other voltages according to page 3/102 on request. For accessories, see page 3/114.

200

250

For spare parts, see page 3/125.

132

160

S12

400

500

250

355

400

400

430

610

1

1

1 unit

1 unit

1 unit

1 unit

1 unit

41B

41B

41B

41B

41B

¹⁾ Alternatively the 3RT1054-1 contactor (55 kW) can be supplied with busbar connections instead of box terminals. Without additional price. In the 8th position of the article number, the "1" must be replaced with "6", e.g. 3RT1054-6..35.

²⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

SIRIUS 3RT10 contactors, 3-pole, 30 ... 250 kW

Options

Rated control supply voltages, possible on request (change of the 10th and 11th digits of the Article No.)

Rated control supply voltage $U_{\rm S}$	Contactor type	3RT104	3RT144	3RT134	3RT1617, 3RT1627, 3RT1647	
	Size	S3	S3	S3	S00, S0, S3	
Size S3						
AC operation		•				
Solenoid coils for 50	Hz ¹⁾					
24 V AC		B0	В0	В0	B0	
42 V AC		D0	D0			
18 V AC 110 V AC		H0 F0	H0 F0	 F0	 F0	
230 V AC		PO	P0	PO	P0	
240 V AC		U0	U0	U0	U0	
400 V AC	4)	VO	V0	V0	V0	
Solenoid coils for 50	and 60 Hz ¹⁾					
24 V AC		C2	C2	C2	C2	
42 V AC 48 V AC		D2 H2	D2 H2	D2 H2		
110 V AC		G2	G2	G2	G2	
220 V AC		N2	N2	N2	N2	
230 V AC	0)	L2	L2	L2	L2	
Solenoid coils (for U	,					
50 Hz	60 Hz	140	1/0	1/0	1/0	
110 V AC 220 V AC	120 V AC 240 V AC	K6 P6	K6 P6	K6 P6	K6 P6	
Solenoid coils (for J	apan)					
50/60 Hz ³⁾	60 Hz ⁴⁾					
100 V AC	110 V AC	G6	G6	G6	G6	
200 V AC	220 V AC	N6	N6	N6	N6	
400 V AC	440 V AC	R6	R6	R6	R6	
DC operation						
12 V DC 24 V DC		 B4	 B4	 B4		
42 V DC		D4	D4	D4		
48 V DC		W4	W4			
60 V DC		E4	E4			
110 V DC 125 V DC		F4 G4	F4 G4	F4 G4		
220 V DC		M4	M4	M4		
230 V DC		P4	P4			
Examples						
AC operating	3RT1045-1A P0 0			d coil for 50 Hz for rate		
mechanism	3RT1045-1A G2 0			d coil for 50/60 Hz for ra		itage 110 V AC
DC operating mechanism	3RT1046-3B B4 0		* *	ed control supply voltag		
mechanisiii	3RT1046-3B G4 0	Contactor with spring	-type terminals; for rate	ed control supply voltag	ge 125 V DC	
Rated control supply	Contactor type	3RT1.5A	Rated control supply	Contactor type	3RT1.5N	3RT1.5P
voltage $U_{\rm s}$		3RT1.6A	voltage $U_{\rm S}$		3RT1.6N	3RT1.6P
U _{s min} U _{s max} 5)	6:	3RT1.7A	11 11 5)	C:	3RT1.7N	3RT1.7P
	Size	S6, S10, S12	<i>U</i> _{s min} <i>U</i> _{s max} ⁵⁾	Size	S6, S10, S12	S6, S10, S12
Sizes S6 to S12						

UC operation (50/60 Hz AC, DC) Conventional operating mechanisms

Conventional operating mechanisms		Solid-state operating mechanisms		
23 26 V AC/DC 42 48 V AC/DC 110 127 V AC/DC 200 220 V AC/DC 220 240 V AC/DC	B3 D3 F3 M3 P3	21 27.3 V AC/DC 96 127 V AC/DC 200 277 V AC/DC	B3 F3 P3	 F3 P3
240 277 V AC/DC 380 420 V AC/DC 440 480 V AC/DC 500 550 V AC/DC 575 600 V AC/DC	U3 V3 R3 S3 T3			

Coil operating range: at 50 Hz: 0.8 to 1.1 x U_s at 60 Hz: 0.85 to 1.1 x U_s.
 Coil operating range (size S3): at 50 Hz and 60 Hz: 0.8 to 1.1 x U_s.

³⁾ Coil operating range (size S3): at 50 Hz: 0.8 to 1.1 x $U_{\rm S}$ at 60 Hz: 0.85 to 1.1 x $U_{\rm S}$.

 $^{^{4)}}$ Coil operating range: at 60 Hz: 0.8 to 1.1 \times $U_{\rm S}.$

⁵⁾ Operating range: $0.8 \times U_{\text{s min}}$ to $1.1 \times U_{\text{s max}}$.

SIRIUS 3RT12 vacuum contactors, 3-pole, 110 ... 250 kW

Overview

UC operation

The contactors can be operated with AC (50 to 60 Hz) as well as with DC.

Two types of solenoid operation are available:

- Conventional operating mechanism, version 3RT12..-. A
- Solid-state operating mechanism, version 3RT12..-. N

Withdrawable coils

For simple coil replacement, e.g. if the application is replaced, the solenoid coil can be pulled out upwards after the release mechanism has been actuated and can be replaced by any other coil of the same size.

Vacuum interrupters

In contrast with the 3RT10 contactors – the main contacts operate in air under atmospheric conditions – the contact gaps

of the 3RT12 vacuum contactors are contained in hermetically enclosed vacuum interrupters. Neither arcs nor arcing gases are produced. The particular benefit of 3RT12 vacuum contactors, however, is that their electrical endurance is at least twice as long as that of 3RT10 contactors. They are therefore particularly well suited to frequent switching in jogging/mixed operation, e.g. in crane control systems.

Note:

Vacuum contactors are basically unsuitable for switching DC voltage.

Auxiliary contact complement

The contactors can be fitted with up to 8 lateral auxiliary contacts (identical auxiliary switch blocks from S3 to S12). Of these, no more than 4 are permitted to be NC contacts.


Technical specifications

Туре	W ►		3RT1264	3RT1265	3RT1266	3RT1275	3RT1276
Size			S10			S12	
Dimensions (W x H x D)	T m	nm	145 x 210 x 20	6		160 x 214 x 22	5

General data

Permissible mounting position

The contactors are designed for operation on a vertical mounting surface.



		<u>*</u>
Mechanical endurance Operation	ng cycles	10 million
Electrical endurance		1)
Rated insulation voltage U_i (pollution degree 3)	V	1000
Rated impulse withstand voltage $U_{\rm imp}$	kV	8
Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N	V	690
Mirror contacts		Yes, acc. to IEC 60947-4-1, Appendix F
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact.		
Permissible ambient temperature		
During operation	°C	-25 +60/+55 with AS-Interface
During storage	°C	-55 +80
Degree of protection acc. to IEC 60947-1, Appendix C		IP00/open (where applicable, use additional terminal covers)
Touch protection acc. to EN 50274		Finger-safe only for vertical contact from the front
Shock resistance		
Rectangular pulse	g/ms	8.5/5 and 4.2/10
Sine pulse	g/ms	13.4/5 and 6.5/10
Conductor cross-sections		2)
Electromagnetic compatibility (EMC)		3)
Short-circuit protection		
Main circuit		
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1		

500

500

400

10

Α

• Miniature circuit breakers with C characteristic

• Type of coordination "1"

• Type of coordination "2"

• Fuse links, operational class gG:

DIAZED, type 5SB; NEOZED, type 5SE (weld-free protection $I_k \le 1$ kA)

• Weld-free⁴⁾

Auxiliary circuit

800

800

500

⁽short-circuit current $I_{k} \le 400 \text{ A}$)

 ¹⁾ For contact endurance of the main contacts, see page 3/84.
 2) For conductor cross-sections, see page 3/106.

³⁾ For electromagnetic compatibility (EMC), see page 3/80.

⁴⁾ Test conditions according to IEC 60947-4-1.

SIRIUS 3RT12 vacuum contactors, 3-pole, 110 ... 250 kW

Type Size		3RT1264 S10	3RT1265 S10	3RT1266 S10	3RT1275 S12	3RT1276 S12
Control						
Operating range of the solenoid AC/DC (UC)		0.8 × U ₂ min .	1.1 x U _{s max}			
Power consumption of the solenoid operation (when coil is cold and rated range $U_{S \min} U_{S \max}$)			Sillax			
Conventional operating mechanisms						
AC operation						
- Closing at $U_{\rm S~min}$ - Closing at $U_{\rm S~max}$ - Closed at $U_{\rm S~min}$ - Closed at $U_{\rm S~max}$	VA/p.f. VA/p.f. VA/p.f. VA/p.f.	530/0.9 630/0.9 6.1/0.9 7.4/0.9			700/0.9 830/0.9 7.6/0.9 9.2/0.9	
DC operation						
- Closing at $U_{\rm S~min}$ - Closing at $U_{\rm S~max}$ - Closed at $U_{\rm S~min}$ - Closed at $U_{\rm S~max}$	W W W	580 700 6.8 8.2			770 920 8.5 10	
Solid-state operating mechanisms						
AC operation						
- Closing at $U_{\rm s~min}$ - Closing at $U_{\rm s~min}$ - Closed at $U_{\rm s~min}$ - Closed at $U_{\rm s~max}$	VA/p.f. VA/p.f. VA/p.f. VA/p.f.	420/0.8 570/0.8 4.3/0.8 5.6/0.8			560/0.8 750/0.8 5.4/0.8 7/0.8	
DC operation						
- Closing at $U_{\rm S~min}$ - Closing at $U_{\rm S~max}$ - Closed at $U_{\rm S~min}$ - Closed at $U_{\rm S~max}$	W W W	460 630 3.4 4.2			600 800 4 5	
PLC control input acc. to IEC 61131-2		Type 2				
Rated voltage	V DC	24				
Operating range	V DC	17 30				
Power consumption	mA	≤ 30				
Operating times (Total break time = Opening delay + Arcing time) Conventional operating mechanisms						
• For 0.8 x $U_{\rm s min}$ 1.1 x $U_{\rm s max}$						
- Closing delay - Opening delay	ms ms	30 95 40 80			45 100 60 100	
• For $U_{\text{s min}} \dots U_{\text{s max}}$						
- Closing delay - Opening delay	ms ms	35 50 50 80			50 70 70 100	
Arcing time	ms	10 15			10 15	
Solid-state operating mechanism, actuated via A1/A2						
• For 0.8 x <i>U</i> _{s min} 1.1 x <i>U</i> _{s max}						
- Closing delay - Opening delay	ms ms	105 145 80 100			120 150 80 100	
• For $U_{\text{S min}} \dots U_{\text{S max}}$						
- Closing delay - Opening delay	ms ms	110 130 80 100			125 150 80 100	
Arcing time	ms	10 15			10 15	
Solid-state operating mechanism, actuated via PLC input						
• For 0.8 x $U_{\text{s min}}$ 1.1 x $U_{\text{s max}}$						
- Closing delay - Opening delay	ms ms	45 80 80 100			60 90 80 100	
• For $U_{\text{s min}} \dots U_{\text{s max}}$						
Closing delayOpening delay	ms ms	50 65 80 100			65 80 80 100	
Arcing time	ms	10 15			10 15	
, o g iii	1110	10 10			10 10	

SIRIUS 3RT12 vacuum contactors, 3-pole, 110 ... 250 kW

Type Size		3RT1264 S10	3RT1265 S10	3RT1266 S10	3RT1275 S12	3RT1276 S12
Main circuit						
Load rating with AC						
Utilization category AC-1						
Switching resistive loads						
 Rated operational currents I_e 						
- At 40 °C up to 1 000 V - At 60 °C up to 1 000 V	A A	330 300			610 550	
Rated power for AC loads ¹⁾ with p.f. = 0.95 (at 60 °C)						
- At 230 V	kW	113			208	
- At 400 V	kW	197			362	
- At 500 V - At 690 V	kW kW	246 340			452 624	
- At 1 000 V	kW	492			905	
\bullet Minimum conductor cross-section for loads with $I_{\rm e}$						
- At 40 °C	mm_2^2	185			2 x 185	
- At 60 °C	mm ²	185			2 x 185	
Utilization categories AC-2 and AC-3 • Rated operational currents I						
Rated operational currents I _e Lip to 1000 V	۸	225	265	300	400	500
 Up to 1000 V Rated power for slipring or squirrel-cage motors at 50 and 60 Hz 	Α	223	200	300	400	300
Act 230 V At 230 V - At 230 V	kW	73	85	97	132	164
- At 400 V	kW	128	151	171	231	291
- At 500 V	kW	160	189	215	291	363
- At 690 V - At 1 000 V	kW kW	223 320	265 378	288 428	400 578	507 728
Thermal load capacity	A	1 800	2 120	2 400	3 200	4 000
Power loss per conducting path at $I_a/AC-3$	W	9	12	14	21	32
Utilization category AC-4 (for $I_a = 6 \times I_e$)						
Maximum values:						
Rated operational current I _e						
- Up to 690 V	Α	195	230	280	350	430
Rated power for squirrel-cage motors with 50 Hz and 60 Hz						
- At 400 V	kW	110	132	160	200	250
The following applies to a contact endurance of about 200 000 operating cycles:						
• Rated operational currents I _e						
- Up to 690 V	Α	97	115	140	175	215
- Up to 1 000 V	Α	68	81	98	123	151
Rated power for squirrel-cage motors with 50 Hz and 60 Hz						
- At 230 V - At 400 V	kW kW	30 55	37 65	45 79	56 98	70 122
- At 500 V	kW	68	81	98	96 124	153
- At 690 V	kW	94	112	138	172	212
- At 1 000 V	kW	95	114	140	183	217
Switching frequency						
Switching frequency z in operating cycles/hour						
Contactors without overload relays	∟ -1	0.000				
No-load switching frequency Contable of formula and the contable of t	h ⁻¹	2 000				
• Switching frequency <i>z</i> during rated operation ³⁾	1	000	750		700	
- I _e /AC-1 at 400 V - I _e /AC-2 at 400 V	h ⁻¹ h ⁻¹	800 300	750 250		700 250	
- I _e /AC-3 at 400 V	h ⁻¹	750	750		750	
- I _e /AC-4 at 400 V	h ⁻¹	250	250		250	
Contactors with overload relays						
Mean value	h ⁻¹	60				

¹⁾ Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).

According to IEC 60947-4-1. Rated values for various start-up conditions, see Chapter 7, "Protection Equipment" → "Overload Relays".

³⁾ Dependence of the switching frequency z' on the operational current I' and operational voltage U: $z' = z \times (I_0 I') \times (400 \text{ V/U}')^{1.5} \times 1/\text{h}$

SIRIUS 3RT12 vacuum contactors, 3-pole, 110 ... 250 kW

Type			3RT126.	3RT127.
Size	for cross-sections		S10	S12
Main cond			Screw terminals	
147.1		-	<u> </u>	
With moun	ted box terminals	Type	3RT19 66-4G	
	Terminal screwsTightening torque	Nm	M12 (hexagon socket, A/F 5) 20 22 (180 195 lb.in)	
Front clam	ping point connected			
00479	Finely stranded with end sleeveFinely stranded without end sleeveStranded	mm² mm² mm²	70 240 70 240 95 300	
NSBC	 AWG cables, solid or stranded 	AWG	3/0 600 kcmil	
	 Ribbon cable conductors (Number x Width x Thickness) 	mm	Min. 6 x 9 x 0.8; max. 20 x 24 x 0.5	
Rear clam	ping point connected			
30_00480	Finely stranded with end sleeveFinely stranded without end sleeveStranded	mm² mm² mm²	120 185 120 185 120 240	
	 AWG cables, solid or stranded 	AWG	250 500 kcmil	
	 Ribbon cable conductors (Number x Width x Thickness) 	mm	Min. 6 x 9 x 0.8; max. 20 x 24 x 0.5	
Both clam	ping points connected			
00481	Finely stranded with end sleeveFinely stranded without end sleeveStranded	mm² mm² mm²	Min. 2 x 50, max. 2 x 185 Min. 2 x 50, max. 2 x 185 Min. 2 x 70, max. 2 x 240	
	 AWG cables, solid or stranded 	AWG	Min. 2 x 2/0, max. 1 x 500 kcmil	
z	 Ribbon cable conductors (Number x Width x Thickness) 	mm	Max. 2 x (20 x 24 x 0.5)	
Busbar co	nnections			
	Connecting bars (max. width)	mm	25	
Cable lug	connection			
	 Finely stranded with cable lug¹⁾ Stranded with cable lug¹⁾ AWG cables, solid or stranded 	mm² mm² AWG	50 240 70 240 2/0 500 kcmil	
	Terminal screwsTightening torque	Nm	M10 x 30 (A/F 17) 14 24 (124 210 lb.in)	
Auxiliary	conductors			
	• Solid	mm²	$2 \times (0.5 \dots 1.5)^{2}$; $2 \times (0.75 \dots 2.5)^{2}$ acco	ording to IEC 60947;
	Finely stranded with end sleeve	mm²	max. 2 x (0.75 4) 2 x (0.5 1.5) ²⁾ , 2 x (0.75 2.5) ²⁾	
	AWG cables, solid or stranded	AWG	2 x (18 14)	
1) \\	Terminal screwsTightening torque	Nm	M3 (Pozidriv size 2) 0.8 1,2 (7 10.3 lb.in)	

When connecting cable lugs to DIN 46234, the 3RT1966-4EA1 terminal cover must be used for conductor cross-sections of 240 mm² and more as well as DIN 46235 for conductor cross-sections of 185 mm² and more to keep the phase clearance.

²⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

Type Size		3RT1264 S10	3RT1265 S10	3RT1266 S10	3RT1275 S12	3RT1276 S12
® and ® rated data						
Rated insulation voltage	600		600	600		
Uninterrupted current, at 40 °C, open and enclosed	А	330		540		
Maximum horsepower ratings (and approved values)						
 Rated power for three-phase motors at 60 Hz At 200 V At 230 V At 460 V At 575 V 	hp hp hp hp	60 75 150 200	75 100 200 250	100 125 250 300	125 150 300 400	150 200 400 500
Short-circuit protection ¹⁾ • CLASS L fuse • Circuit breakers acc. to UL 489	kA A A	10 700 500	18 800 700	18 800 900	18 1200 1000	30 1200 1200
Overload relays	3RB2066		3RB2066	3RB2066		

¹⁾ For more information about short-circuit values, e.g. for protection against short-circuit currents, see the UL reports on the individual devices, www.siemens.com/sirius/manuals, or the UL Guide "Industrial Control Panels for North America", www.siemens.com/sirius/ul-download.



SIRIUS 3RT12 vacuum contactors, 3-pole, 110 ... 250 kW

Selection and ordering data

UC operation (50/60 Hz AC, DC)

- Withdrawable coils with integrated coil switch (varistor)
- Auxiliary and control conductors: Screw terminals
- · Main conductors: Busbar connections





126.	3R

3RT12	26.						3RT1	27.							
Size	Rated data AC-2 and AC-3, AC-1, T _U : Up to 60 °C T _U : 40 °C							ary icts, il	Rated control supply voltage $U_{\rm S}$	DT	Screw terminals	+	PU (UNIT, SET, M)	PS*	PG
	Opera- tional three-phase motors current I_e at 50 Hz and up to			Opera- tional current I_e up to	1	7			Article No.	Price per PU					
	1 000 V	230 V			690 V	1 000 V									
	Α	kW	kW	kW	kW	Α	NO	NC	V AC/DC						
Conv	ventional	operat	ing med	chanisi	ns										
) July 1	A1(+) \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	L1 J3/L2	J ^{5/L3} J ¹³	21 31 4 	.3										
٠	A2(-) _{2/}	•	6/T3 14	22 32 4			_	_							
S10	225	55	110	160	200	330	2	2	110 127 220 240	A A	3RT1264-6AF36 3RT1264-6AP36		1	1 unit 1 unit	41B 41B
	265	75	132	160	250	330	2	2	110 127 220 240	A A	3RT1265-6AF36 3RT1265-6AP36		1 1	1 unit 1 unit	41B 41B
	300	90	160	200	250	330	2	2	110 127 220 240	A A	3RT1266-6AF36 3RT1266-6AP36		1	1 unit 1 unit	41B 41B
S12	400	132	200	250	400	610	2	2	110 127 220 240	A A	3RT1275-6AF36 3RT1275-6AP36		1	1 unit 1 unit	41B 41B
	500	160	250	355	500	610	2	2	110 127 220 240	A A	3RT1276-6AF36 3RT1276-6AP36		1	1 unit 1 unit	41B 41B
Solic	l-state op	perating	g mecha	anisms	· For 2	4 V DC PI	LC ou	tput							
	A1(+) 1/1 A2(-) 2/	-47	5/L3 13 6/T3 14	21 31 4 7 7											
S10	225	55	110	160	200	330	2	2	96 127 200 277	B B	3RT1264-6NF36 3RT1264-6NP36		1 1	1 unit 1 unit	41B 41B
	265	75	132	160	250	330	2	2	96 127 200 277	B B	3RT1265-6NF36 3RT1265-6NP36		1 1	1 unit 1 unit	41B 41B
	300	90	160	200	250	330	2	2	96 127 200 277	B B	3RT1266-6NF36 3RT1266-6NP36		1 1	1 unit 1 unit	41B 41B
S12	400	132	200	250	400	610	2	2	96 127 200 277	B B	3RT1275-6NF36 3RT1275-6NP36		1 1	1 unit 1 unit	41B 41B
	500	160	250	355	500	610	2	2	96 127 200 277	B B	3RT1276-6NF36 3RT1276-6NP36		1 1	1 unit 1 unit	41B 41B

Other voltages according to page 3/102 on request. For more 3TF68/3TF69 vacuum contactors (335 kW and 450 kW), see page 3/133. For accessories, see page 3/116.

 $^{^{\}rm 1)}$ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

Accessories for 3RT1 Contactors

General data

Overview

Snap-on auxiliary switch blocks

Various auxiliary switch blocks can be added to the 3RT1 basic units depending on the application:


Sizes S3 to S12

Terminal designations according to EN 50005 or EN 50012.

One 4-pole or up to four single-pole auxiliary switch blocks (screw or spring-type connections) can be snapped on. When the contactors are switched on, the NC contacts are opened first and then the NO contacts are closed.

Also available are 2-pole auxiliary switch blocks (screw terminals) for cable entry from above or below in the design of a quad block (feeder auxiliary switch).

If the installation space is limited in depth, 2-pole auxiliary switch blocks (screw or spring-type connections) can be attached laterally (on the left or on the right).

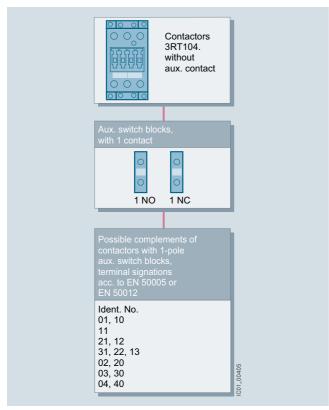


1-pole auxiliary switch blocks for 3RT1 contactors

The terminal designations of the single-pole auxiliary switch blocks are comprised of identification numbers (location identifiers) on the basic unit and of function numbers on the auxiliary switch blocks.

The terminal designations of the individual auxiliary switch blocks correspond to EN 50005 or EN 50012, those of the complete contactors with auxiliary switch block 2 NO + 2 NC correspond to EN 50012.

The auxiliary switch blocks attached to the front can be disassembled with the help of a centrally arranged release lever; the laterally attached auxiliary switch blocks are easy to remove by pressing on the checkered surfaces.

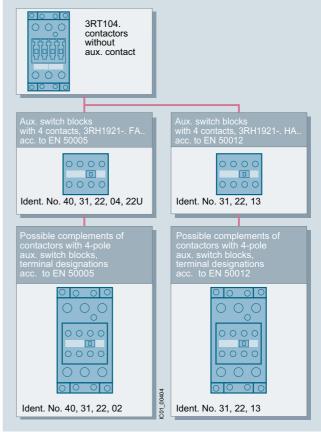

4-pole auxiliary switch blocks for 3RT1 contactors

The laterally mountable auxiliary switch blocks according to EN 50012 can be used only when no 4-pole auxiliary switch blocks are snapped onto the front. If single-pole auxiliary switch blocks are used in addition, the location identifiers on the contactor must be noted.

Two enclosed and two standard contacts are available with the 3RH1921-.FE22 solid-state compatible auxiliary switch block, which can be attached to the front. The laterally mountable, solid-state compatible 3RH1921-2DE11 auxiliary switch block contains two enclosed contacts (1 NO + 1 NC). The enclosed contacts are suitable in particular for switching small voltages and currents (hard gold-plated contacts) and for operation in dusty atmospheres. The NC auxiliary contacts are mirror contacts.

Sizes S3 to S12

A maximum of eight auxiliary contacts can be attached, please note the following:

- Of these eight auxiliary contacts, there must be no more than four NC contacts
- Ensure the symmetry of laterally mounted auxiliary switch blocks

Power Contactors for Switching Motors Accessories for 3RT1 Contactors

General data

Solid-state time-delay auxiliary switch blocks


The solid-state, time-delay auxiliary switch block is fitted onto the front side of the contactor.

The timer module, which is available in the "ON-DELAY" and "OFF-DELAY" versions, allows time-delayed functions up to 100 s (three delay ranges).

It contains a relay with one NO contact and one NC contact; depending on the version, the relay is switched either after an ON-delay or after an OFF-delay.

The timer module with WYE-DELTA FUNCTION is equipped with one delayed and one instantaneous NO contact, with a dead time of 50 ms between the two. The delay time of the NO contact can be adjusted between 1.5 s and 30 s.

Wye-delta function



The contactor on which the solid-state time-delay auxiliary switch block is mounted operates without a delay.

Sizes S3 to S12

The timer module is supplied with power through two terminals (A1/A2); the time delay of the auxiliary switch block can be activated either by a parallel link to any contactor coil or by any power source.

The OFF-delay version operates without a control signal, the minimum ON period is 200 ms.

A single-pole auxiliary switch block can be snapped onto the front of the contactor in addition to the timer module.

The timer module has no integrated components for overvoltage damping.

Electronic timing relay blocks with semiconductor output

The timer module, which is available in the "ON-DELAY" and "OFF-DELAY" versions with control signal, allows time-delayed functions up to 100 s (three delay ranges). Contactors fitted with a timing relay block close or open after a delay according to the set time.

The ON-delay variant of the timing relay is connected in series with the contactor coil; terminal A1 of this coil must not be connected.

With the OFF-delay variant of the timing relay, the contactor coil is contacted directly through the relay; terminals A1 and A2 of the contactor coil must not be connected.


The timing relays are suitable for both AC and DC operation.

Size S3

The timing relay block for size S3 contactors is plugged into coil terminals A1 and A2 on top of each contactor; the timing relay is connected both electrically and mechanically by means of pins.

A varistor is integrated in the timer module in order to damp opening surges in the contactor coil.

Configuration

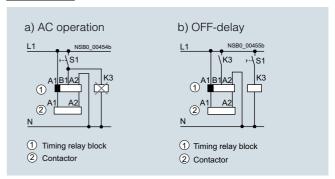

The activation of loads parallel to the start input is not permissible with AC operation (see (a) in the circuit diagram).

The 3RT1926-2D... OFF-delay timing relay blocks have a zero potential start input B1. This means that if there is a parallel load on terminal B1, activation can be simulated with AC voltage. In this case, the additional load (e.g. contactor K3) must be wired (see (b) in the drawing).

Accessories for 3RT1 Contactors

General data

OFF-delay device for size S3 contactors

AC and DC operation

IEC 60947, EN 60947

For screw fixing and snap-on mounting onto TH 35 standard mounting rails. The OFF-delay devices have screw terminals.

The OFF-delay device prevents a contactor from dropping out unintentionally when there is a short-time voltage dip or voltage failure. It supplies a downstream, DC-operated contactor with the necessary energy during a voltage dip, ensuring that the contactor does not trip. The 3RT1916 OFF-delay devices are specifically designed for operation with the 3RT1 contactors and 3RH1 contactor relays.

The OFF-delay device operates without external voltage on a capacitive basis and in size S3 can be energized only with DC.

A contactor opens after a delay when the capacitors of the solenoid coil, built into the OFF-delay device, are switched in parallel. In the event of voltage failures, the capacitors are discharged via the solenoid coil and thereby delay the opening of the contactor.

If the command devices are upstream of the OFF-delay device in the circuit, the OFF-delay takes effect with every opening operation. If the opening operation is downstream of the OFF-delay device, an OFF-delay only applies in the event of failure of the mains voltage.

Operation

For size S3, only one version with 24 V DC operation is available.

A DC-operated contactor is connected to the output according to the input voltage that is applied.

The mean value of the OFF-delay is approximately 1.5 times the specified minimum time.

Surge suppressors

 Without LED (also for spring-type terminals) Sizes S3, S6 to S12

All 3RT1 contactors and 3RH1 contactor relays can be retrofitted with RC elements or varistors for damping opening surges in the coil. Diodes or diode assemblies (comprising noise suppression diodes and Zener diodes for short break times) can be used.

With the size S3 contactors, varistors, RC elements and diode assemblies can be plugged on directly at the coil terminals, either on the top or underneath.

The plug-in direction of the diodes and diode assemblies is determined by a coding device.

Coupling contactors are supplied either without overvoltage damping or with a varistor or diode connected as standard, according to the version.

Note:

The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assembly 2 to 6 times, varistor +2 to 5 ms).

Coupling links for mounting on contactors of size S3

DC operation

IEC 60947 and EN 60947

The coupling link is suitable for use in any climate. It is finger-safe according to EN 50274. The terminal designations comply with EN 50005.

System-compatible operation with 24 V DC, operating range 17 to 30 $\rm V$.

Low power consumption in conformity with the technical specifications of the solid-state systems. An LED indicates the switching state.

Surge suppression

The 3RH1924-1GP11 coupling link has an integrated surge suppressor (varistor) for the contactor coil being switched.

Mounting

The 3RH1924-1GP11 coupling link is mounted directly on the contactor coil.

Sealable covers for sizes S3 to S12

When contactors and contactor relays are used in safety-related applications, it must be ensured that it is impossible to operate the contactors manually.

For SIRIUS contactors there are sealable covers available for this purpose as accessories; these prevent accidental manual operation. These are transparent molded-plastic caps with a bracket that enables the contactor to be sealed.




Power Contactors for Switching Motors Accessories for 3RT1 Contactors

General data

Technical specifications						
Contactor	Туре		3RT1926-2C 3RT1926-2D	3RT1926-2E	3RT1926-2F	3RT1926-2G
	,,		Electronic timing relay blocks	Solid-state time-	delay auxiliary	witch blocks
			with semiconductor output			
General data						
Rated insulation voltage <i>U</i> _i Pollution degree 3 Overvoltage category III according to IEC 60664		V AC	250			
Permissible ambient temperature	· ·					
During operation		°C	-25 +60			
During storage		°C	-40 +80			
Degree of protection acc. to IEC 60947-1, Appe						
• Cover • Terminals	orrain o		IP40 IP20			
Shock resistance Half-sine acc. to IEC 60068-2-27		<i>g</i> /ms	15/11			
Vibration resistance according to IEC 60068-2-6		Hz/mm	10 55/0.35			
EMC tests Basic spe	ecification		IEC 61000-6-4			
Conductor connections						
• Solid		mm ²	2 x (0.5 1.5), 2 x (0.75 4)			
 Finely stranded with end sleeve 		mm ²	2 x (0.5 2.5)			
 AWG cables, solid or stranded 		AWG	2 x (18 14)			
Terminal screws			M3			
Tightening torque		Nm lb.in	0.8 1.2 7 10.3			
Permissible mounting position			Any			
Control						
Operating range of excitation			0.8 1.1 x <i>U</i> _s , 0.95 1.05 times the rated frequency	0.85 1.1 x <i>U</i> _s , 0.95 1.05 times	s the rated freque	ency
Rated power	,	W	1	2		
Power consumption at 230 V AC, 50 Hz		VA	1	4		
Overvoltage protection			Varistor integrated in timing relay			
Recovery time		ms	50	150		
Minimum ON period		ms	35	200 (with OFF-de	lay)	
Setting accuracy With reference to upper limit of scale	Тур.	%	±15	,		
Repeat accuracy	Max.	%	±1			
Load side						
Rated operational currents $I_{\rm e}$						
Load current		Α	0.3			
• AC-15, 230 V, 50 Hz		A		3		
• DC-13, 24 V		Α		1		
• DC-13, 110 V		A		0.2		
• DC-13, 230 V		A		0.1		
•	to 10 ms		10			
DIAZED protection gG operational class		A		4		
Residual current	Max.		5			
Voltage drop With conducting output	Max.		3.5			
Mechanical endurance	Operatino	cycles	100 x 10 ⁶	10 x 10 ⁶		
Switching frequency for load		, ,				
• With I _e at 230 V AC		h ⁻¹	2 00	2 500		
With 3RT2016 contactor at 230 V AC		h ⁻¹	2 500	5 000		

Accessories for 3RT1 Contactors

General data

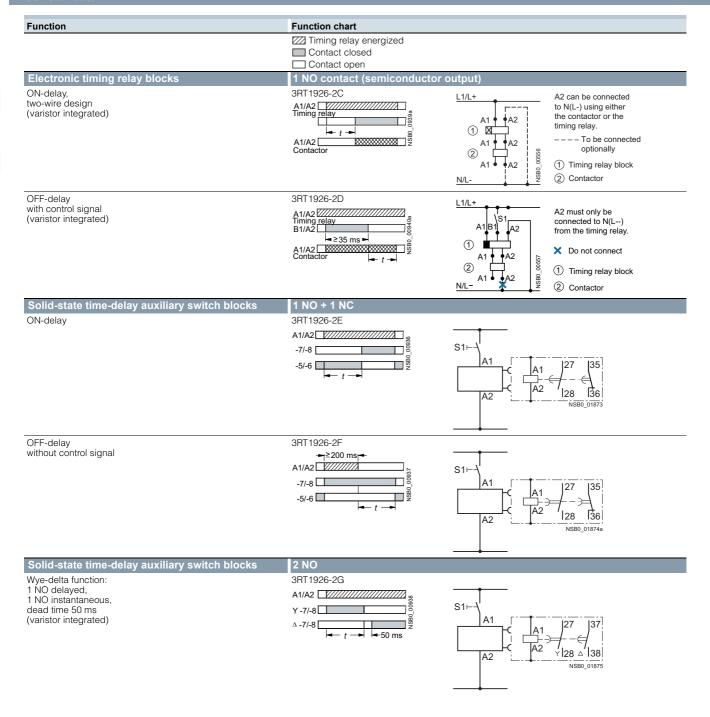



Power Contactors for Switching Motors Accessories for 3RT1 Contactors

General data

Contactor	Туре		3RH1924, 3TX7090 Coupling links for mounting on contactors acc. to IEC 60947/EN 60947
General data			
Rated insulation voltage <i>U</i> _i (pollution degree 3)		V	300
Protective separation between coil and contacts acc. to IEC 60947-1, Appendix N		V AC	Up to 300
Permissible ambient temperature			
During operation		°C	-25 +60
During storage		°C	-40 +80
Degree of protection acc. to IEC 60947-1, Appendix C			
Connections			IP20
• Enclosure			IP40
Circuit diagram			2 A1 Coupling link 2 Contactor
Conductor cross-sections			
• Solid		mm^2	2 x (0.5 2.5)
Finely stranded with end sleeve		mm ²	2 x (0.5 1.5)
Terminal screws			M3
Control side			
Rated control supply voltage $U_{\rm S}$		V DC	24
Operating range		V DC	17 30
Power consumption at U_s		W	0.5
Nominal current input		mA	20
Release voltage		V	≥ 4
Function display			Yellow LED
Protection circuit			Varistor
Load side			
Mechanical endurance		Opera- ting cycles	20 x 10 ⁶
Electrical endurance at $I_{\rm e}$		Opera- ting cycles	1 x 10 ⁵
Switching frequency		Opera- ting cycles/h	5 000
Make-time		ms	Approx. 7
Break-time		ms	Approx. 4
Bounce time		ms	Approx. 2
Contact material			AgSnO
Switching voltage	AC/DC	V	24 250
Permissible residual current of the electronics (with 0 signal)		mA	2.5

Accessories for 3RT1 Contactors

Auxiliary switches

Selection and ordering data

PU (UNIT, SET, M) = 1 = 1 unit = 41B





3RH1921-1HA.., 3RH1921-1FA...

3RH1921-2HA.., 3RH1921-2FA...

For contactors Auxiliary contacts	DT	Screw terminals	DT	Spring-type terminals	8
Ident. No. Version		Article No. Pri	ce PU	Article No.	Price per PU
Type NO NC NO NC					

Auxiliary switch blocks for snapping onto the front according to EN 50012

Size S31)

0.20 00	4-pole auxili	ary sv	vitch b	locks					
3RT1.4	31	3	1		 13 21 33 43	•	3RH1921-1HA31	•	3RH1921-2HA31
	22	2	2		 ₁₄ ₂₂ ₃₄ ₄₄ ₁₃ ₂₁ ₃₁ ₄₃	•	3RH1921-1HA22	•	3RH1921-2HA22
	13	1	3		 14 22 32 44 13 21 31 41	>	3RH1921-1HA13	•	3RH1921-2HA13
					14 22 32 42				

Sizes S3 to S122)

	4-pole auxili	ary sv	vitch b	locks					
3RT1.4 3RT1.7	22	2	2		 53 61 71 83 	В	3RH1921-1XA22-0MA0	D	3RH1921-2XA22-0MA0

Auxiliary switch blocks for snapping onto the front according to EN 50005

Sizes S3 to	S12 ¹⁾									
	4-pole auxili	ary sw	itch b	locks						
3RT1.4 (3RT1.7)	40	4				13 23 33 43 	•	3RH1921-1FA40	•	3RH1921-2FA40
	31	3	1			13 23 33 41 	•	3RH1921-1FA31	•	3RH1921-2FA31
	22	2	2			13 23 31 41 	•	3RH1921-1FA22	•	3RH1921-2FA22
	04		4			11 21 31 41 • • • • • • • • • • • • • • • • • • •	•	3RH1921-1FA04	А	3RH1921-2FA04
	22 U			2	2	17 27 35 45 18 28 36 46	•	3RH1921-1FC22	А	3RH1921-2FC22

For multi-unit packing and reusable packaging, see Chapter 16, "Appendix" \rightarrow "Ordering Notes".

¹⁾ Exception: 3RT16.

²⁾ Exception: 3RT12, 3RT16.



Power Contactors for Switching Motors Accessories for 3RT1 Contactors

Auxiliary switches

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B









3RH1921-1LA.		3RH1921-1MA
	A '11'	

	-										
For contactors	Auxiliary conta	acts			0	DΤ	Screw terminals		DT	Spring-type terminals	<u> </u>
	Ident. No.	Version					Article No.	Price		Article No.	Price
		\	1	7				per PU			per PU
Туре		NO NC	NO	NC							

Auxiliary switch blocks for snapping onto the front according to EN 50005

Size S	33 ¹⁾
--------	------------------

Size S31)										
	2-pole auxi one side • Cable en	=			with c	able entry on				
3RT1.4	11	1	1			13 21	>	3RH1921-1LA11	-	
	20	2				13 23 14 24	•	3RH1921-1LA20	-	
	02		2			11 21 	•	3RH1921-1LA02	-	
	Cable en	try from	belov	N						
3RT1.4	11	1	1			13 21	•	3RH1921-1MA11		
	20	2				14 22 13 23	•	3RH1921-1MA20	-	
	02		2			14 24 11 21 	•	3RH1921-1MA02		

Sizes S3 to S12²)

0.200 00 10	1-pole auxilia according to	ary sw EN 50	itch b	locks nd EN	50012					
3RT1.4 3RT1.7	10	1				.3 	•	3RH1921-1CA10	•	3RH1921-2CA10
	01		1			.1 	>	3RH1921-1CA01	•	3RH1921-2CA01
	10			1		.7 	•	3RH1921-1CD10		-
	01				1	[.5 	>	3RH1921-1CD01		-

¹⁾ Exception: 3RT16.

²⁾ Exception: 3RT12, 3RT16.

Accessories for 3RT1 Contactors

Auxiliary switches

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B



3RH1921-1DA11 3RH1921-1JA11 3RH1921-1EA... 3RH1921-1KA...



3RH1921-2DA11 3RH1921-2JA11 3RH1921-2EA.

						3RH1921-1EA 3RH1921-1KA			3RH1921-2EA 3RH1921-2KA	
For contacto	ors Auxili	ary conta	acts		DT	Screw terminals		DT	Spring-type terminals	<u>~</u>
Type	Version	on L MC				Article No.	Price per PU		Article No.	Price per PU
		ble aux	iliary switch	blocks						
Sizes S3 t		30012	Left	Right						
		laterally t or left),		xiliary switch bloc	k					
3RT1.4 (3RT1.7)	1	1	21 13	31 43	>	3RH1921-1DA11		•	3RH1921-2DA11	
Sizes S3 t	o S12		Left	Right						
	Seco (right	nd latera t or left),	illy mountable 2-pole	auxiliary switch b	lock					
3RT1.4 3RT1.7	1	1	61 53 2 54	71 83	>	3RH1921-1JA11		>	3RH1921-2JA11	
			iliary switch							
according Sizes S3 to		50005	Left	Right						
0,200 00 1	First	laterally t or left),	mountable au	xiliary switch bloc	k					
3RT1.4 3RT1.7	2		53 63 \	73 83 \	•	3RH1921-1EA20		>	3RH1921-2EA20	
	1	1	54 64 51 63	74 84 71 83	•	3RH1921-1EA11				
		2		72 84 71 81	>	3RH1921-1EA02		>	3RH1921-2EA02	
			52 62	72 82						
Sizes S3 t		nd latera	Left	Right auxiliary switch b	lock					
3RT1.4		t or left),	2-pole	-	•	3RH1921-1KA20		D	3RH1921-2KA20	
3RT1.7	2		153 163 154 164	173 183 174 184		3KH 1921-1KA20		D	3KH1921-2KA2U	
	1	1	151 163	171 183	>	3RH1921-1KA11			-	
		2	152 164 151 161 	172 184 171 181 	>	3RH1921-1KA02		D	3RH1921-2KA02	
			152 162	172 182						



Power Contactors for Switching Motors Accessories for 3RT1 Contactors

Auxiliary switches

PU (UNIT, SET, M) = 1 PS* = 1 PG = 4 = 1 unit = 41B







3RH1921-2DE11, 3RH1921-2JE11

3RH1921-1FE22

3RH1921-2JE22

For contactors	Contacts	DT	Screw terminals	(1)	DT	Spring-type terminals				
	Version			Price		Article No.	Price			
			ρε	er PU			per PU			
Туре	NO NO ¹⁾ NC ¹⁾ NC									

Solid-state compatible auxiliary switch blocks

- For operation in dusty atmospheres
 For solid-state circuits with rated operational currents I_e/AC-14 and DC-13 of 1 ... 300 mA at 3 ...60 V • Hard gold-plated contacts

	 Mirror contacts accord 	ding to IEC 6	60947-4-1, Appendix F				
Auxiliary swite according to E	ch blocks for snappii EN 50005	ng onto th	e front				
Size S3							
3RT1.4	1 1 1 1	13 23 3° 14 24 32		•	3RH1921-1FE22	В	3RH1921-2FE22
Laterally mou	ntable auxiliary switc EN 50012	h blocks					
Sizes S3 to S12		Left	Right				
	First laterally mountab (right or left), 2-pole	le auxiliary	switch block				
3RT1.4 3RT1.7	1 1	21 13	31 43 2 32 44		*	•	3RH1921-2DE11
Sizes S3 to S12		Left	Right				
	Second laterally mountable auxiliary switch block (right or left), 2-pole						
3RT1.4 3RT1.7	1 1	61 53 2 54	71 83 72 84		*	•	3RH1921-2JE11

^{1) 1} NO + 1 NC standard auxiliary switches: See descriptions on page 3/108.

Accessories for 3RT1 Contactors

Solid-state time-delay auxiliary switch blocks and timing relay blocks

Selection and o	rdering dat	ta								
	For contactors	Auxiliary contacts	Rated control supply voltage $U_{\rm S}^{\ 1)}$	Time setting range <i>t</i>	DT	Screw terminals	+	PU (UNIT, SET, M)	PS*	PG
	Туре		V	s		Article No.	Price per PU	, ,		
		iary switch block rding to DIN 461	ks for snapping ont	o the front,			•			
	Sizes S3 t					•				
And the second		With ON-delay ²⁾								
3 3 3	3RT10, 3RT13, 3RT14,	1 NO + 1 NC	24 AC/DC	0.05 1 0.5 10 5 100	C A	3RT1926-2EJ11 3RT1926-2EJ21 3RT1926-2EJ31		1 1 1	1 unit 1 unit 1 unit	41H 41H 41H
200	3RT15		100 127 AC	0.05 1 0.5 10 5 100	C	3RT1926-2EC11 3RT1926-2EC21 3RT1926-2EC31		1 1 1	1 unit 1 unit 1 unit	41H 41H 41H
3RT1926-2			200 240 AC	0.05 1 0.5 10 5 100	B ▶ B	3RT1926-2ED11 3RT1926-2ED21 3RT1926-2ED31		1 1 1	1 unit 1 unit 1 unit	41H 41H 41H
		OFF-delay withou	t control signal ²⁾³⁾							
	3RT10, 3RT13, 3RT14,	1 NO + 1 NC	24 AC/DC	0.05 1 0.5 10 5 100	A A	3RT1926-2FJ11 3RT1926-2FJ21 3RT1926-2FJ31		1 1 1	1 unit 1 unit 1 unit	41H 41H 41H
	3RT15		100 127 AC/DC	0.05 1 0.5 10 5 100	B ▶ B	3RT1926-2FK11 3RT1926-2FK21 3RT1926-2FK31		1 1 1	1 unit 1 unit 1 unit	41H 41H 41H
			200 240 AC/DC	0.05 1 0.5 10 5 100	B A A	3RT1926-2FL11 3RT1926-2FL21 3RT1926-2FL31		1 1 1	1 unit 1 unit 1 unit	41H 41H 41H
		Wye-delta functio	n (varistor integrated)							
	3RT10,	1 NO delayed	24 AC/DC	1.5 30	>	3RT1926-2GJ51		1	1 unit	41H
	3RT13, 3RT14, 3RT15	+ 1 NO instanta- neous, dead time 50 ms	100 127 AC 200 240 AC	1.5 30 1.5 30	>	3RT1926-2GC51 3RT1926-2GD51		1 1	1 unit 1 unit	41H 41H
Electronic timin		ks with semicon	ductor output							
	Size S3					•				
			o top-lying coil termin vith screw terminals tor integrated)	als,						
and I	3RT104, 3RT134 ⁴⁾		24 66 AC/DC	0.05 1 0.5 10 5 100	B B B	3RT1926-2CG11 3RT1926-2CG21 3RT1926-2CG31		1 1 1	1 unit 1 unit 1 unit	41H 41H 41H
200			90 240 AC/DC	0.05 1 0.5 10 5 100	A	3RT1926-2CH11 3RT1926-2CH21 3RT1926-2CH31		1 1 1	1 unit 1 unit 1 unit 1 unit	41H 41H 41H
3RT1926-2C	-	OFF dala		5 100		3111320-201131		'	1 dilit	4111
		 OFF-delay with (varistor integral 								
and	3RT104, 3RT134 ⁴⁾		24 66 AC/DC	0.05 1 0.5 10 5 100	C B D	3RT1926-2DG11 3RT1926-2DG21 3RT1926-2DG31		1 1 1	1 unit 1 unit 1 unit	41H 41H 41H
KIDL SO			90 240 AC/DC	0.05 1 0.5 10	B B C	3RT1926-2DH11 3RT1926-2DH21 3RT1926-2DH31		1 1	1 unit 1 unit	41H 41H
3RT1926-2D				5 100	U	3KT 1920-2DF31		1	1 unit	41H
OFF-delay device										
00000	Size S3 3RT104		24 DC Only for contactors with DC operation	S3: 70 fixed	В	3RT1916-2BE01		1	1 unit	41H

For technical specifications, operating travel diagrams and circuit diagrams, see pages 3/111 and 3/112.

 $^{^{\}rm 1)}$ The AC voltages are valid for 50 and 60 Hz.

Terminals A1 and A2 for the control supply voltage of the solid-state time-delay auxiliary switch must be connected to the associated contactor by means of connecting cables.
 Setting of output contacts in as-supplied state not defined (bistable relay). Application of the control supply voltage once results in contact change-over to the correct setting.

⁴⁾ In addition to these, no other auxiliary contacts are permitted.



Power Contactors for Switching Motors Accessories for 3RT1 Contactors

Surge suppressors

									- ' ' '	
Selection and	ordering o	lata								
	For contactors	Version	Rated control voltage $U_s^{(1)}$	l supply	DT	Article No. ²⁾	Price per PU	PU (UNIT,	PS*	PG
			AC operation	DC operation				SET, M)		
	Туре		V AC	V DC						
Surge suppres	ssors witho	out LED								
	Size S3 (a	lso for spring-type terminals	s)							
		For fitting onto the coil termina	als at top or b	ottom						
Section 10	3RT1.4	Varistors	24 48 48 127 127 240 240 400	24 70 70 150 150 250	A A A	3RT1926-1BB00 3RT1926-1BC00 3RT1926-1BD00 3RT1926-1BE00		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
3RT1926-1B.00			400 600		В	3RT1926-1BF00		1	1 unit	41B
3RT1936-1C.00	3RT1.4	RC elements	24 48 48 127 127 240 240 400 400 600	24 70 70 150 150 250 	* * * * B	3RT1936-1CB00 3RT1936-1CC00 3RT1936-1CD00 3RT1936-1CE00 3RT1936-1CF00		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
6.11.1000 10.00	3RT1.4	Diode assembly for DC operatio	on							
		Connectable at the top (e.g. for contactor with overload relay)		24 30 250	>	3RT1936-1ER00 3RT1936-1ES00		1 1	1 unit 1 unit	41B 41B
		• Connectable at the bottom (e.g. for fuseless load feeders)		24 30 250	► B	3RT1936-1TR00 3RT1936-1TS00		1 1	1 unit 1 unit	41B 41B
	Sizes S6 to	o S12								
		For connecting to withdrawabl conventional operating mech solid-state operating mechan	anism 3RT1	A		Screw terminals	+			
3RT1956-1C.00	3RT1.5, 3RT1.6, 3RT1.7	RC elements	24 48 48 127 127 240 240 400 400 600	24 70 70 150 150 250	^ ^ ^ C	3RT1956-1CB00 3RT1956-1CC00 3RT1956-1CD00 3RT1956-1CE00 3RT1956-1CF00		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
					_	Spring-type terminals	<u> </u>			
	3RT1.5, 3RT1.6, 3RT1.7	RC elements	24 48 48 127 127 240 240 400 400 600	24 70 70 150 150 250	A A C	3RT1956-1CB02 3RT1956-1CC02 3RT1956-1CD02 3RT1956-1CE02 3RT1956-1CF02		1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B

¹⁾ Can be used for AC operation for 50/60 Hz. Please inquire about further voltages.


³⁾ For 3RT1.3 with AC operation mountable only at the top.

For contactor	Version s	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Type							
ain current path surg	e suppression modules for 3RT12 vacuum contacto	rs					
Sizes S	10 and S12		•				
3RT12	For damping overvoltages and protecting motor windings against multiple re-ignition when switching off three-phase motors.						
	For connection on the contactor feeder side (2-T1/4-T2/6-T3). For separate installation.						
	Rated operational voltage $U_e = 690 \text{ V AC}$	С	3RT1966-1PV3		1	1 unit	41B
	Rated operational voltage $U_0 = 1000 \text{ V AC}$	С	3RT1966-1PV4		1	1 unit	41B

²⁾ For packs of 10 or 5 units, "-Z" and order code "X90" must be added to the article number

Accessories for 3RT1 Contactors

Miscellaneous accessories

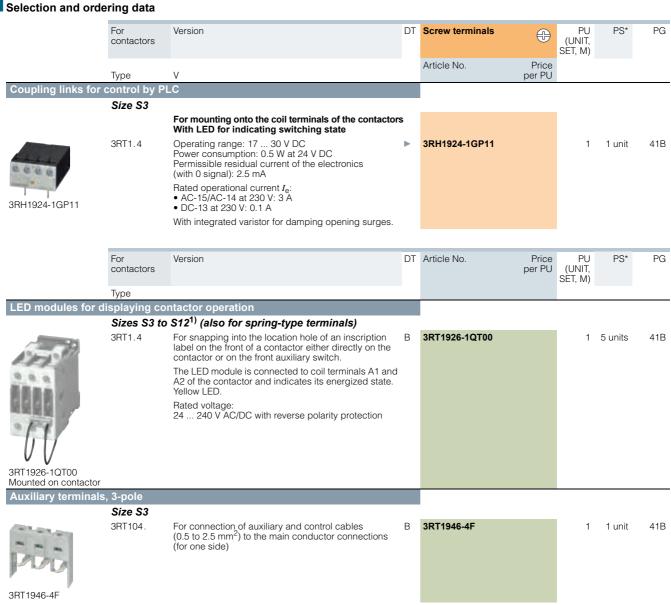

For technical specifications and circuit diagram for coupling links, see page 3/113.

¹⁾ For sizes S6 to S12 the connecting leads have to be extended.

Power Contactors for Switching Motors Accessories for 3RT1 Contactors

Miscellaneous accessories

						Miscell	aneous	access	ories
	For contact	ors	Version	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Size	Туре					v=.,,		
Box terminal blocks									
	S6		For round and ribbon cables ¹⁾						
II n		3RT1.5	Up to 70 mm ^{2 2)} Up to 120 mm ²	>	3RT1955-4G 3RT1956-4G		1 1	1 unit 1 unit	41B 41B
Tex Section 1		(3RB205)	Auxiliary conductor connection for box	В	3TX7500-0A		1	1 unit	41B
			terminals		017/1000 07/		· ·	1 driit	
	S10, S12	3RT1.6, 3RT1.7	Up to 240 mm ²	>	3RT1966-4G		1	1 unit	41B
3RT1954G		(3RB206,	With auxiliary conductor connection						
Carrana		3RB216)							
Covers			Towning I cover for boy towning I						
The Real Property lies			Terminal covers for box terminals (additional touch protection)						
ALC: NO PERSON			To be fitted at the box terminals						
是一个。 第二十二章		0DT100	(2 units required per contactor)	В	3RT1936-4EA4		1	1 unit	41D
		3RT133, 3RT153	For 4-pole contactors	В	3K11930-4EA4		'	1 unit	41B
	S3	3RT104,		>	3RT1946-4EA2		1	1 unit	41B
		3RT144	Fan A mala acostontana	п	2074046 4544			at compta	440
3RT1946-4EA2	S6 ³⁾	3RT134 3RT1.5	For 4-pole contactors Length: 25 mm	В	3RT1946-4EA4 3RT1956-4EA2		1	1 unit 1 unit	41B 41B
4	S10, S12 ³⁾		Length: 30 mm	•	3RT1966-4EA2		1	1 unit	41B
Robert State of	,	3RT1.7							
60.00									
6 6									
3RT1956-4EA2			Towning Lawrence for achie lives and						
March M. 10			Terminal covers for cable lugs and busbar connection ³⁾						
			For complying with the phase						
10 /60 /50			clearances and as touch protection if box terminal is removed						
SIEMENS			(2 units required per contactor)						
15. M. M.	S3	3RT104, 3RT144		В	3RT1946-4EA1		1	1 unit	41B
THE REST	S6	3RT1.5	Length: 100 mm	>	3RT1956-4EA1		1	1 unit	41B
3RT1956-4EA1	S10/S12	3RT1.6,	Length: 120 mm	>	3RT1966-4EA1		1	1 unit	41B
		3RT1.7	Combo annual or for a service of						
			Can be screwed on free screw end; covers one busbar connection						
			(1 set = 6 units)						
	S6	3RT1.5	M8	В	3TX6526-3B		1	1 unit	41B
	S10, S12	3RT1.6, 3RT1.7	M10	В	3TX6546-3B		1	1 unit	41B
3TX6526-3B									
	-		For busbar cover between contactor and						
			3RB2 overload relay or wiring module for contactor assemblies	•					
	S6	3RT1.5	Length: 27 mm	>	3RT1956-4EA3		1	1 unit	41B
	S10/S12 ⁴⁾	3RT1.6,	Length: 42 mm	>	3RT1966-4EA3		1	1 unit	41B
		3RT1.7	For busbar cover of the flat line						
			connectors for reversing and wye-delta						
	66	ODT4 5	assemblies		2DT4056 4544			4	440
Sealable covers	S6	3RT1.5	Length: 38 mm	<u> </u>	3RT1956-4EA4		1	1 unit	41B
Socialistic covers	S3 S12	3RT1.3	1 unit required per contactor	С	3RT1926-4MA10		1	5 units	41B
		3RT1.3 3RT1.7 ⁵⁾	- 41 11	-					.=
IC01_00162 3RT1926-4MA10									
1) Connectable cross soot	iona of the a	antantara an							

Connectable cross-sections of the contactors, see Technical Specifications, pages 3/89 and 3/94).

²⁾ As standard for 3RT1054-1 contactor (55 kW).

³⁾ Also fits on contactors S6 to S12 with box terminals.

⁴⁾ The 3RT1966-4EA3 cover is required in addition for use in contactor assemblies (reversing/wye-delta).

⁵⁾ Exception: contactors and contactor relays with auxiliary switch block mounted onto the front.

Accessories for 3RT1 Contactors

Miscellaneous accessories

	For contacto	ors	Max. conductor cross-sections	DT	Screw terminals	+	PU (UNIT, SET, M)	PS*	PG
	Size	Туре	mm^2		Article No.	Price per PU			
Links for paralleling									
		3-pole, with (star jumpe	through hole rs) ¹⁾²⁾³⁾						
	S3	3RT104, 3RT144	185	•	3RT1946-4BB31		1	1 unit	41B
3RT1946-4BB31									
	S6	3RT1.5		•	3RT1956-4BA31		1	1 unit	41B
3RT1956-4BA31	S10/S12	3RT1. 6, 3RT1. 7		•	3RT1966-4BA31		1	1 unit	41B

	Version	DT	Spring-type terminals	<u> </u>	PU (UNIT, SET, M)	PS*	PG
			Article No.	Price per PU			
Insulation stop for se on conductors up to	curely holding back the conductor insulation 1 mm ²						
	Insulation stop strip can be inserted in cable entry of spring-type terminals (2 strips per contactor required, can be removed in pairs)	В	3RT1916-4JA02		1	20 units	41B
3RT1916-4JA02	For all SIRIUS devices with spring-type terminals, up to 2.5 mm ² conductor cross-section.						
Tools for opening sp	ring-type terminal points						
	For all SIRIUS devices with spring-type terminals, for conductor cross-sections up to 2.5 mm²						
-	Not suitable for devices with removable terminal						
3RA2908-1A	Length: approx. 200 mm, 3.0 mm x 0.5 mm, titanium gray/black, partially insulated	Α	3RA2908-1A		1	1 unit	41B
	Version	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Blank labels							
	Unit labeling plates for SIRIUS devices ¹⁾						
	• 10 mm × 7 mm, pastel turquoise	С	3RT1900-1SB10		100	816 units	41B
	• 20 mm × 7 mm, pastel turquoise	D	3RT1900-1SB20		100	340 units	41B
	Adhesive labels for SIRIUS devices						
9428	• 19 mm × 6 mm, pastel turquoise	С	3RT1900-1SB60		100	3060 units	41B
	• 19 mm × 6 mm, zinc/yellow	С	3RT1900-1SD60		100	3060 units	41B
3RT1900-1SB20							

¹⁾ PC labeling system for individual inscription of unit labeling plates available from: murrplastik Systemtechnik GmbH (see Chapter 16, "Appendix" → "External Partners").

The links for paralleling can be reduced by one pole.
 Size S3: A cover plate is included for touch protection. (Can only be used when the box terminal is removed.)
 Sizes S6 to S12: The 3RT1956-4EA1 (for S6) or 3RT1966-4EA1 (for S10 and S12) cover can be used for touch protection.

 $^{^{\}rm 3)}$ The star jumpers to the contactors of sizes S6 and S10/S12 are approved according to UL and CSA.



Power Contactors for Switching Motors Spare parts for 3RT1 Contactors

Solenoid coils

Selection and ordering data

PU (UNIT, SET, M) = 1 PS* = 1 PG = 4 = 1 unit = 41B









944-5A.01	3RT1944-5B.42		
ontactors	Rated control supply voltage $U_{\rm S}$		[
	AC	DC	

DT Spring-type

For contacto	ors	Rated con	trol supply v	oltage U _s		DT	Screw terminals	+	DT	Spring-type terminals	$\stackrel{\infty}{\boxplus}$
		AC 50 Hz	50/60 Hz	60 Hz	DC		Article No.	Price per PU		Article No.	Price per PU
Size	Туре	V	V	V	V						
Solenoid of	coils · AC or	peration									
S3	3RT1044	24 42 48 110	 	 	 	B B B	3RT1944-5AB01 3RT1944-5AD01 3RT1944-5AH01 3RT1944-5AF01		B B B	3RT1944-5AB02 3RT1944-5AD02 3RT1944-5AH02 3RT1944-5AF02	
		230 400				B B	3RT1944-5AP01 3RT1944-5AV01		B B	3RT1944-5AP02 3RT1944-5AV02	
		 	24 42 48 110	 	 	B B B	3RT1944-5AC21 3RT1944-5AD21 3RT1944-5AH21 3RT1944-5AG21		B B B	3RT1944-5AC22 3RT1944-5AD22 3RT1944-5AH22 3RT1944-5AG22	
			220 230			B B	3RT1944-5AN21 3RT1944-5AL21		B B	3RT1944-5AN22 3RT1944-5AL22	
		110 220 	 100 200	120 240 110 220	 	B B B	3RT1944-5AK61 3RT1944-5AP61 3RT1944-5AG61 3RT1944-5AN61		B B B	3RT1944-5AK62 3RT1944-5AP62 3RT1944-5AG62 3RT1944-5AN62	
			400	440		В	3RT1944-5AR61		В	3RT1944-5AR62	
	3RT1045, 3RT1046, 3RT134., 3RT1446,	24 42 48 110	 	 	 	B B B	3RT1945-5AB01 3RT1945-5AD01 3RT1945-5AH01 3RT1945-5AF01		B B B	3RT1945-5AB02 3RT1945-5AD02 3RT1945-5AH02 3RT1945-5AF02	
	3RT154.	230 400				B C	3RT1945-5AP01 3RT1945-5AV01		B B	3RT1945-5AP02 3RT1945-5AV02	
		 	24 42 48 110	 	 	B B B	3RT1945-5AC21 3RT1945-5AD21 3RT1945-5AH21 3RT1945-5AG21		B B B	3RT1945-5AC22 3RT1945-5AD22 3RT1945-5AH22 3RT1945-5AG22	
			220 230			B B	3RT1945-5AN21 3RT1945-5AL21		B B	3RT1945-5AN22 3RT1945-5AL22	
		110 220 	 100 200	120 240 110 220	 	B B C	3RT1945-5AK61 3RT1945-5AP61 3RT1945-5AG61 3RT1945-5AN61		B B B	3RT1945-5AK62 3RT1945-5AP62 3RT1945-5AG62 3RT1945-5AN62	
			400	440		В	3RT1945-5AR61		В	3RT1945-5AR62	
Solenoid o	coils · DC op	peration									
S3	3RT104., 3RT134., 3RT144., 3RT154.	 	 	 	24 42 48 60	B C B B	3RT1944-5BB41 3RT1944-5BD41 3RT1944-5BW41 3RT1944-5BE41		B B B	3RT1944-5BB42 3RT1944-5BD42 3RT1944-5BW42 3RT1944-5BE42	
		 	 	 	110 125 220 230	B B B	3RT1944-5BF41 3RT1944-5BG41 3RT1944-5BM41 3RT1944-5BP41		B B B	3RT1944-5BF42 3RT1944-5BG42 3RT1944-5BM42 3RT1944-5BP42	

Note:

Contactors with AC and DC coils have different depths. It is only possible to replace AC coils with AC coils or DC coils with DC ones.

Spare parts for 3RT1 Contactors

Solenoid coils

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B



3RT1955-5A..1

For contact	otors	Rated control supply voltage $U_{\text{S min}} \dots U_{\text{S max}}$	DT	Screw terminals	+	Spring-type terminals	<u> </u>
0:	T	V 40/D0		Article No.	Price per PU	Article No.	Price per PU
Size	Type wable coils	V AC/DC			po o		рог. г
	tional operating i	machanisms					
S6	3RT105, 3RT145	23 26 42 48 110 127 200 220	B B B B	3RT1955-5AB31 3RT1955-5AD31 3RT1955-5AF31 3RT1955-5AM31	E E E	3RT1955-5AD32 3RT1955-5AF32	
		220 240 240 277 380 420 440 480	В В В В	3RT1955-5AP31 3RT1955-5AU31 3RT1955-5AV31 3RT1955-5AR31	E E E	3RT1955-5AU32 3RT1955-5AV32	
		500 550 575 600	B B	3RT1955-5AS31 3RT1955-5AT31	E		
S10	3RT106, 3RT146	23 26 42 48 110 127 200 220	В В В С	3RT1965-5AB31 3RT1965-5AD31 3RT1965-5AF31 3RT1965-5AM31	E E E	3RT1965-5AD32 3RT1965-5AF32	
		220 240 240 277 380 420 440 480	B B B B	3RT1965-5AP31 3RT1965-5AU31 3RT1965-5AV31 3RT1965-5AR31	E E E	3RT1965-5AU32 3RT1965-5AV32	
		500 550 575 600	C	3RT1965-5AS31 3RT1965-5AT31	E		
S10	3RT126 Vacuum contactors	23 26 42 48 110 127 200 220	B B A C	3RT1966-5AB31 3RT1966-5AD31 3RT1966-5AF31 3RT1966-5AM31		 	
		220 240 240 277 380 420 440 480	A C B C	3RT1966-5AP31 3RT1966-5AU31 3RT1966-5AV31 3RT1966-5AR31		- - -	
		500 550 575 600	C C	3RT1966-5AS31 3RT1966-5AT31		Ξ	
S12	3RT107, 3RT147, 3RT127 Vacuum	23 26 42 48 110 127 200 220	В В В С	3RT1975-5AB31 3RT1975-5AD31 3RT1975-5AF31 3RT1975-5AM31	E E E	3RT1975-5AD32 3RT1975-5AF32	
	contactors	220 240 240 277 380 420 440 480	B B B B	3RT1975-5AP31 3RT1975-5AU31 3RT1975-5AV31 3RT1975-5AR31	E E E	3RT1975-5AU32 3RT1975-5AV32	
		500 550 575 600	C	3RT1975-5AS31 3RT1975-5AT31	E		



Power Contactors for Switching Motors Spare parts for 3RT1 Contactors

Solenoid coils

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B



00T	400		- 1	-
3RT	195	າກ-	צוכ	

For contac	tors	Rated control supply voltage $U_{\rm s}$	DT	Screw terminals		DT	Spring-type terminals	$\stackrel{\infty}{\square}$
Size	Type	V AC/DC		Article No.	Price per PU		Article No.	Price per PU
Withdray	wable coils							
Solid-sta	te operating me	chanisms						
For 24 V D	C PLC output							
S6	3RT105, 3RT145	21 27.3 96 127 200 277	С В В	3RT1955-5NB31 3RT1955-5NF31 3RT1955-5NP31		B B B	3RT1955-5NB32 3RT1955-5NF32 3RT1955-5NP32	
S10	3RT106, 3RT146	21 27.3 96 127 200 277	В В В	3RT1965-5NB31 3RT1965-5NF31 3RT1965-5NP31		B B B	3RT1965-5NB32 3RT1965-5NF32 3RT1965-5NP32	
	3RT126 Vacuum contactors	21 27.3 96 127 200 277	B C C	3RT1966-5NB31 3RT1966-5NF31 3RT1966-5NP31			 	
S12	3RT107, 3RT147, 3RT127 Vacuum contactors	21 27.3 96 127 200 277	В В В	3RT1975-5NB31 3RT1975-5NF31 3RT1975-5NP31		B B B	3RT1975-5NB32 3RT1975-5NF32 3RT1975-5NP32	
with rema	OC PLC output/PLC ining lifetime indicable coil with laterall							
S6	3RT105, 3RT145	96 127 200 277	В В	3RT1955-5PF31 3RT1955-5PP31				
S10	3RT106, 3RT146	96 127 200 277	В В	3RT1965-5PF31 3RT1965-5PP31			-	
S12	3RT107, 3RT147	96 127 200 277	B B	3RT1975-5PF31 3RT1975-5PP31			Ξ	

Spare parts for 3RT1 Contactors

Contacts and arc chutes

Selection	on and orderi	ng data						
For conta	For contactors Version		DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Type							
Contac	ts with fixing լ	parts						
For con	ntactors with 3	main contacts						
S3	3RT1044 3RT1045 3RT1046	Main contacts (3 NO contacts) for utilization category AC-3 (1 set = 3 movable and 6 fixed switching elements with fixing parts)	B B B	3RT1944-6A 3RT1945-6A 3RT1946-6A		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
S6	3RT1054 3RT1055 3RT1056		* *	3RT1954-6A 3RT1955-6A 3RT1956-6A		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
S10	3RT1064 3RT1065 3RT1066		> >	3RT1964-6A 3RT1965-6A 3RT1966-6A		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
S12	3RT1075 3RT1076		A	3RT1975-6A 3RT1976-6A		1 1	1 unit 1 unit	41B 41B
S3	3RT1446	Main contacts (3 NO contacts) for utilization category AC-1	В	3RT1946-6D		1	1 unit	41B
S6	3RT1456	(1 set = 3 movable and 6 fixed switching elements	В	3RT1956-6D		1	1 unit	41B
S10	3RT1466	with fixing parts)	В	3RT1966-6D		1	1 unit	41B
S12	3RT1476		Α	3RT1976-6D		1	1 unit	41B
	T12 vacuum co		_					
S10	3RT1264 3RT1265 3RT1266	3 vacuum interrupters with fixing parts	B B B	3RT1964-6V 3RT1965-6V 3RT1966-6V		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
S12	3RT1275 3RT1276		B B	3RT1975-6V 3RT1976-6V		1 1	1 unit 1 unit	41B 41B
For con	ntactors with 4	main contacts						
S3	3RT1344 3RT1346	Main contacts (4 NO contacts) for utilization category AC-1 (1 set = 4 movable and 8 fixed switching elements with fixing parts)	B B	3RT1944-6E 3RT1946-6E		1 1	1 unit 1 unit	41B 41B
Arc chu	utes							
S3	3RT104., 3RT1446	Arc chutes, 3-pole	В	3RT1946-7A		1	1 unit	41B
S6	3RT1054 3RT1055 3RT1056		B B B	3RT1954-7A 3RT1955-7A 3RT1956-7A		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
S10	3RT1064 3RT1065 3RT1066		B B B	3RT1964-7A 3RT1965-7A 3RT1966-7A		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
S12	3RT1075 3RT1076		B B	3RT1975-7A 3RT1976-7A		1 1	1 unit 1 unit	41B 41B
S6	3RT1456		В	3RT1956-7B		1	1 unit	41B
S10	3RT1466		В	3RT1966-7B		1	1 unit	41B
S12	3RT1476		В	3RT1976-7B		1	1 unit	41B

3TF6 vacuum contactors, 3-pole, 335 ... 450 kW

Overview

Standards

IEC 60947-1, EN 60947-1, IEC 60947-4-1, EN 60947-4-1,

IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The 3TF68/3TF69 contactors are suitable for use in any climate.

They are finger-safe according to EN 50274. Terminal covers may have to be fitted onto the connecting bars, depending on the configuration with other devices (see Accessories and Spare Parts on page 3/135).

Main contacts

Contact erosion indication with 3TF68/3TF69 vacuum contactors

The contact erosion of the vacuum interrupters can be checked during operation with the help of 3 white double slides on the contactor base. If the distance indicated by one of the double slides is < 0.5 mm while the contactor is in the closed position, then the vacuum interrupter must be replaced. To ensure maximum reliability, it is recommended to replace all 3 vacuum interrupters simultaneously.

Auxiliary contacts

Contact reliability

These auxiliary contacts are particularly suitable for solid-state circuits with currents \geq 1 mA at a voltage \geq 17 V.

Electromagnetic compatibility

The 3TF68/3TF69....**C**.. contactors for AC operation are fitted with an electronically controlled solenoid operating mechanism with a high interference immunity (for EMC values, see page 3/130). The solenoid coil is connected to varistors for protection against overvoltages.

The 3TF68/3TF69....Q.. contactors for AC operation are designed for operation in systems with AC control supply voltage which is subject to strong interference. The solenoid systems of these contactors are configured in the DC economy circuit with rectification. The rectifier bridge is connected to varistors for protection against overvoltages.

Protection of the main current paths

An integrated RC varistor connection for the main current paths dampens the switching overvoltage rises to safe values. This prevents multiple restricting. It can therefore be assumed that the motor winding cannot be damaged by switching overvoltages with steep voltage rises.

Note:

During operation in installations in which the emitted interference limits cannot be observed, e.g. when used for output contactors in converters, 3TF68/3TF69....Q contactors – without connection of the main current path circuit – are recommended.

Technical specifications

Contactor	Туре	3TF68 and 3TF69
Rated data of the auxiliary contacts		According to IEC 60947-5-1
Rated insulation voltage <i>U</i> _i (pollution degree 3)	V	690
Conventional thermal current I _{th} = Rated operational current I _e /AC-12	А	10
AC load Rated operational current <i>I_e</i> /AC-15/AC-14 • For rated operational voltage <i>U_e</i>		
- At 24 V - At 110 V - At 125 V - At 220 V - At 230 V	A A A A	10 10 10 6 5.6
- At 380 V - At 400 V - At 500 V - At 660 V - At 690 V	A A A A	4 3.6 2.5 2.5 2.3
DC load Rated operational current <i>I_e</i> /DC-12 • For rated operational voltage <i>U_e</i>		
- At 24 V - At 60 V - At 110 V - At 125 V	A A A	10 10 3.2 2.5
- At 220 V - At 440 V - At 600 V	A A A	0.9 0.33 0.22
Rated operational current <i>I_e/DC-13</i> • For rated operational voltage <i>U_e</i>		Auxiliary contacts with delayed NC contact: NS = No specification
- At 24 V - At 60 V - At 110 V - At 125 V	A A A	10 6 5 NS 1.14 0.98 NS
- At 220 V - At 440 V - At 600 V	A A A	0.48 NS 0.13 NS 0.07 0.07
® and ® rated data of the auxiliary contacts		
Rated voltage, max.	V AC	600
Switching capacity		A 600, P 600

3TF6 vacuum contactors, 3-pole, 335 ... 450 kW

Contactor


Endurance of the auxiliary contacts

The contact endurance for utilization category AC-12 or AC-15/AC-14 depends mainly on the breaking current. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

The characteristic curves apply to 230 V AC.



3TF68 and 3TF69

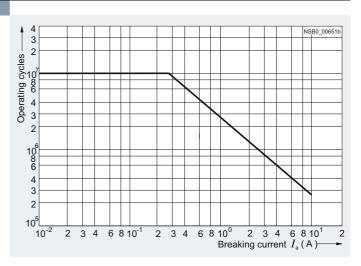

Contactor

Contact erosion indication with vacuum contactors

The contact erosion of the vacuum interrupters can be checked during operation with the help of three white double slides on the contactor base.

If the distance indicated by one of the double slides is < 0.5 mm while the contactor is in the closed position, the vacuum interrupter must be replaced. To ensure maximum reliability, it is recommended to replace all three vacuum interrupters at once.

Contact endurance of the main contacts

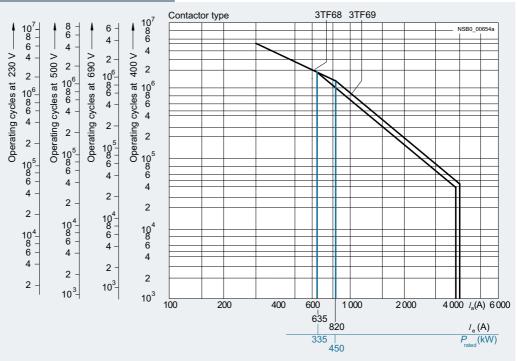


Diagram legend:

 $L_{\rm rated}$ = Rated power for squirrel-cage motors at 400 V $L_{\rm a}$ = Breaking current $L_{\rm e}$ = Rated operational current

3/128

3TF6 vacuum contactors, 3-pole, 335 ... 450 kW

Type I W		3TF68	3TF69
Size		14	14
Dimensions (W x H x D)	mm	230 x 276 x 237	230 x 295 x 237
General data			
Permissible mounting position, installation instructions (1)2)		22,5°,22,5°	
The contactors are designed for operation on a vertical mounting surface		N S S S S S S S S S S S S S S S S S S S	
Mechanical endurance Operat	ing cycles	5 million	
Electrical endurance Operat	ing cycles	3)	
Rated insulation voltage U_i (pollution degree 3)	kV	1	
Rated impulse withstand voltage $U_{\rm imp}$	kV	8	
Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N	kV	1	
Mirror contacts		Yes, acc. to IEC 60947-4-1, Appendix	F
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact.			
One NC contact each must be connected in series for the right and lef auxiliary switch block respectively.	t		
Permissible ambient temperature			
 During operation⁴⁾ During storage 	°C °C	-25 +55 -55 +80	
Degree of protection acc. to IEC 60947-1, Appendix C		IP00/open (where applicable, use add	ditional terminal covers)
Touch protection acc. to EN 50274		Finger-safe only for vertical contact from	om the front
Shock resistance			
Rectangular pulse			
AC operationDC operation	<i>g</i> /ms <i>g</i> /ms	8.1/5 and 4.7/10 9/5 and 5.7/10	9.5/5 and 5.7/10 8.6/5 and 5.1/10
Sine pulse			
AC operationDC operation	<i>g</i> /ms <i>g</i> /ms	12.8/5 and 7.4/10 14.4/5 and 9.1/10	13.5/5 and 7.8/10 13.5/5 and 7.8/10
Conductor cross-sections		See page 3/132	· ·
Electromagnetic compatibility (EMC)		See page 3/130	
Short-circuit protection			
Main circuit Fuse links, gG operational class: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1			
Type of coordination "1"	Α	1 000	1 250
Type of coordination "2"	Α	500	630
• Weld-free ⁵⁾	Α	400	500
Auxiliary circuit	-		
Short-circuit test			
 with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current I_k = 1 kA acc. to IEC 60947-5-1 	А	10	
• with miniature circuit breakers with C characteristic with short-circuit current $I_{\rm k}=400~{\rm A}$	Α	10	

- 1) To easily replace the laterally mounted auxiliary switches it is recommended to maintain a minimum distance of 30 mm between the contactors.
- 2) If mounted at a 90° angle (current paths are horizontally above each other), the switching frequency is reduced by 80 % compared with the normal values.
- 3) See "Endurance of the auxiliary contacts", page 3/128.
- 4) For ambient temperatures > 55°C, only 3TF6.33-.Q..-Z A02 contactors (= without connection of the main current path circuits) can be used. Then derating is also possible with these contactors:

 - AC-1: $I_{\rm e}$ = 782 A, 644 operating cycles/h; AC-3: operating range 0.85-1.05 x Us, 460 operating cycles/hour, mechanical endurance 5 million operating cycles, lateral clearance
- 5) Test conditions according to IEC 60947-4-1.

Note:

For short-circuit protection of contactors with overload relay, see Configuration Manual "Configuring SIRIUS" http://support.automation.siemens.com/WW/view/en/40625241.

3TF6 vacuum contactors, 3-pole, 335 ... 450 kW

Contactor		Туре	3TF68	3TF69
		Size	14	14
Control				
Solenoid coil operating range			0.8 x <i>U</i> _{s min} 1.1 x <i>U</i> _{s max}	
Power consumption of the solen (for cold coil and $1.0 \times U_s$)	oid coils			
• AC operation, $U_{\text{S max}}$	ClosingClosed	VA/p.f. VA/p.f.	1850/1 49/0.15	950/0.98 30.6/0.31
• AC operation, $U_{\rm s\ min}$	ClosingClosed	VA/p.f. VA/p.f.	1200/1 13.5/0.47	600/0.98 12.9/0.43
• DC economy circuit ¹⁾	Closing at 24 VClosed	W	1010 28	960 20.6
For contactors of type 3TF68/3TF69	9 Q :			
• AC operation, $U_{\rm S min}^{2)}$	- Closing - Closed	VA/p.f. VA/p.f.	1 000/0.99 11/1	1 150/0.99 11/1
Operating times for 0.8 1.1 x U (Total break time = Opening delay			(Values apply to cold and warm co	oil)
AC operation	Closing delayOpening delay	ms ms	70 120 (22 65) ³⁾ 70 100	80 120 70 80
DC economy circuit	Closing delayOpening delay	ms ms	76 110 50	86 280 19 25
Arcing time		ms	10 15	10
For contactors of type 3TF68/3TF6	9 Q :			
AC operation	Closing delayOpening delay	ms ms	35 90 65 90	45 160 30 80
Operating times for 1.0 x U s (Total break time = Opening delay	+ Arcing time)			
AC operation	Closing delayOpening delay	ms ms	80 100 (30 45) ³⁾ 70 100	85 100 70
DC economy circuit	Closing delayOpening delay	ms ms	80 90 50	90 125 19 25
Minimum command duration for closing	Standard Reduced make-time	ms ms	120 90	120
Minimum interval time between to	wo ON commands	ms	100	300

 $^{^{1)}\,}$ At 24 V DC; for further voltages, deviations of up to ±10 % are possible. $^{2)}\,$ Including reversing contactor. $^{3)}\,$ Values in brackets apply to contactors with reduced operating times.

Contactor	Туре	3TF6.44CF7	3TF6.44CM7	3TF6.44CP7	3TF6.44CQ7	3TF6.44CS7
Electromagnetic compatibility						_
Rated control supply voltage U _s	V AC	110 132	200 240	230 277	380 460	500 600
Overvoltage type acc. to IEC 60801		Burst/Surge				
Degree of severity acc. to IEC 60801						
• Burst		3	4	4	4	4
• Surge		4	4	4	4	4
Overvoltage resistance						
• Burst	kV	2	4	4	4	4
• Surge	kV	6	5	5	6	6

3TF6 vacuum contactors, 3-pole, 335 ... 450 kW

Contactor	Type		3TF68	3TF69
	Size		14	14
Main circuit				<u> </u>
Load rating with AC				
Utilization category AC-1 Switching resistive loads				
Rated operational currents I _e	At 40 °C up to 690 V At 55 °C up to 690 V At 55 °C 1 000 V	A A A	700 630 450	910 850 800
 Rated power for AC loads with p.f. = 0.95 at 55 °C 	230 V 400 V 500 V 690 V 1 000 V	kW kW kW kW	240 415 545 720 780	323 558 735 970 1385
\bullet Minimum conductor cross-sections for loads with $I_{\rm e}$	At 40 °C At 55 °C	mm ²	2 x 240 2 x 185	$I_{e} \ge 800 \text{ A: } 2 \times 60 \times 5$ (copper busbars) $I_{e} < 800 \text{ A: } 2 \times 240$
Utilization categories AC-2 and AC-3	At 33 C	111111	2 X 100	1 ₀ < 000 ∧. 2 × 240
• Rated operational currents I_e	Up to 690 V 1 000 V	A A	630 435	820 580
Rated power for slipring or squirrel-cage motors at 50 Hz and 60 Hz	At 230 V 400 V 500 V 690 V 1 000 V	kW kW kW kW	200 347 434 600 600	260 450 600 800 800
Thermal load capacity	10 s current	Α	5 040	7 000
Power loss per conducting path	At I _e /AC-3	W	45	70
Utilization category AC-4 (for $I_a = 6 \times I_e$)				
Maximum values:				
 Rated operational current I_e 	Up to 690 V	Α	610	690
 Rated power for squirrel-cage motors with 50 Hz and 60 Hz 	At 400 V	kW	355	400
The following applies to a contact endurance of about 200 000 operating cycles:				
• Rated operational currents I _e	Up to 690 V 1 000 V	A A	300 210	360 250
Rated power for squirrel-cage motors with 50 Hz and 60 Hz	At 230 V 400 V 500 V ¹) 690 V ¹) 1 000 V ¹)	kW kW kW kW	97 168 210 278 290	110 191 250 335 350
Switching frequency				
Switching frequency z in operating cycles/hour	No load awitching	1/h	2 000	1 000
Contactors without overload relays	No-load switching frequency AC	1/h	2 000	1.222
	No-load switching frequency DC AC-1	1/h	1 000	1 000
	AC-1 AC-2 AC-3 AC-4	1/h 1/h 1/h 1/h	200 500 150	700 200 500 150
Contactors with overload relays (mean value)		1/h	15	15

 $^{^{1)}}$ Max. permissible rated operational current $I_{\rm e}/{\rm AC}\text{-}4$ = $I_{\rm e}/{\rm AC}\text{-}3$ up to 500 V, for reduced contact endurance and reduced switching frequency.

3TF6 vacuum contactors, 3-pole, 335 ... 450 kW

Contactor	Туре	3TF68	3TF69
	Size	14	14
Conductor cross-sections			
Main conductors:		Screw terminals	
Busbar connections			
 Finely stranded with cable lug Stranded with cable lug Solid or stranded Connecting bar (max. width) 	mm ² mm ² AWG mm	50 240 70 240 2/0 500 MCM 50	50 240 50 240 2/0 500 MCM 60 ($U_e \le$ 690 V) 50 ($U_e >$ 690 V)
Terminal screw Tightening torque	Nm lb.in	M10 x 30 14 24 124 210	M12 x 40 20 35 177 310
With box terminal 1)			
- Connectable copper bars - Width - Max. thickness - Terminal screw - Tightening torque	mm mm Nm	15 25 1 x 26 or 2 x 11 A/F 6 (hexagon socket) 25 40 (221 354 lb.in)	15 38 1 x 46 or 2 x 18 A/F 8 (hexagon socket) 35 50 (266 443 lb.in)
Auxiliary conductors:			
 Solid Finely stranded with end sleeve Pin-end connector to DIN 46231 Solid or stranded Tightening torque 	mm ² mm ² mm ² AWG Nm lb.in	$2 \times (0.5 \dots 1)^{2}/2 \times (1 \dots 2.5)^{2}$ $2 \times (0.5 \dots 1)^{2}/2 \times (0.75 \dots 2.5)^{2}$ $2 \times (1 \dots 1.5)$ $2 \times (18 \dots 12)$ $0.8 \dots 1.4$ $7 \dots 12$	

¹⁾ See "Accessories and Spare Parts", page 3/135.

²⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

Contactor	Туре	3TF68	3TF69
	Size	14	14
® and ® rated data			
Rated insulation voltage	V AC	600	600
Uninterrupted current			
Open and enclosed	А	630	820
Maximum horsepower ratings (and approved values)			
Rated power for three-phase motors at 60 Hz			
- At 200 V	hp	231	290
- At 230 V	hp	266	350
- At 460 V - At 575 V	hp hp	530 664	700 860
NEMA/EEMAC ratings			
SIZE	hp	6	7
Uninterrupted current	·		
- Open	Α	600	820
- Enclosed	Α	540	810
Rated power for three-phase motors at 60 Hz			
- At 200 V	hp	150	
- At 230 V	hp	200	300
- At 460 V	hp	400	600
- At 575 V	hp	400	600
Overload relays	Type	3RB12	
Setting range	Α	200 820	

Short-circuit protection with overload relays, see Chapter 7, "Protection Equipment" \to "Overload Relays".

3TF6 vacuum contactors, 3-pole, 335 ... 450 kW

Selection and ordering data

Contactors for AC control

- Main conductors: Busbar connections
- · Auxiliary and control conductors: Screw terminals
- Electronically controlled solenoid operating mechanism with high EMC¹⁾
- With overvoltage protection of the coil (varistor)



3TF68/69

Operational at 50 Hz and at 50 Hz and at 50 V and to 690 V and to 690 V at 500 V at	Price per PU	
690 V (at 40 C) Y		
A kW kW kW kW A NO NC V		
AC operation 50/60 Hz ¹⁾ Size 14		

A1 TA2	$\frac{1}{4}\frac{1}{6}$	5/L3 13 6/T3 14	21 31	43 53 6° 44 54 62	+\									
630	200	335	434	600		700	4	4		A	3TF6844-0CF7 3TF6844-0CM7	1 1	1 unit 1 unit	41B 41B
630	200	335	434	600	600	700	4	4		C A	3TF6844-8CF7 3TF6844-8CM7	1 1	1 unit 1 unit	41B 41B
820	260	450	600	800		910	4	4	110 132 AC 200 240 AC	A	3TF6944-0CF7 3TF6944-0CM7	1 1	1 unit 1 unit	41B 41B
820	260	450	600	800	800	910	4	4	110 132 AC 200 240 AC	СС	3TF6944-8CF7 3TF6944-8CM7	1 1	1 unit 1 unit	41B 41B

1) For electromagnetic compatibility (EMC), see page 3/130. For use of 3TF6 vacuum contactors in the environment of frequency converters, we recommend ordering a special version: 3TF6...-..-Z A02.

3TF68/3TF69 vacuum contactors in their basic version are supplied with integrated overvoltage damping for the main current paths. The surge suppression circuit is not required for operation in circuits with DC choppers, frequency converters or speed-variable operating mechanisms, for example.

The circuit could be damaged by the voltage peaks and harmonics and thus cause phase-to-phase short circuits. For this reason, the contactors can also be supplied without integrated overvoltage damping. Without additional price.

The article number must be supplemented by "-Z" and the order code "A02".

2) Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

Other voltages, see page 3/134. For accessories, see page 3/135, for spare parts, see page 3/136.

Footnotes for page 3/134:

- 1) Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.
- On these versions, a magnetic system is used in the DC economy circuit. A varistor can be retrofitted. A 3TC4417-4AB4 reversing contactor with preassembled connecting cable (approx. 1 m) and plug is included in the scope of supply of the vacuum contactor.
- ³⁾ On this version, a magnetic system with rectifier is used in the DC economy circuit. Varistor integrated. A 3TC4417-... reversing contactor with preassembled connecting cable (approx. 1 m) is included in the scope of supply of the vacuum contactor.
- ⁴⁾ For electromagnetic compatibility (EMC), see page 3/130. For use of 3TF6 vacuum contactors in the environment of frequency converters, we recommend ordering a special version: 3TF6..-..-Z A02.

3TF68/3TF69 vacuum contactors in their basic version are supplied with integrated overvoltage damping for the main current paths. The surge suppression circuit is not required for operation in circuits with DC choppers, frequency converters or speed-variable operating mechanisms, for example.


The circuit could be damaged by the voltage peaks and harmonics and thus cause phase-to-phase short circuits. For this reason, the contactors can also be supplied without integrated overvoltage damping. Without additional price.

The article number must be supplemented by "-Z" and the order code "A02".

3TF6 vacuum contactors, 3-pole, 335 ... 450 kW

Contactors for DC operation and for AC operation which is subject to strong interference

- Main conductors: Busbar connections
- Auxiliary and control conductors: Screw terminals
- DC solenoid system with 3TC44 reversing contactor for series resistor





$^{-}$		00	\sim	_
ರ	1-6	. づづ-	. ()	. /

Rated dat AC-2 and		p to 55 '	°C)			AC-1	Auxilia	,	Rated control supply voltage $U_{\rm S}$	 Screw terminals		PU (UNIT, SET, M)	PS*	PG
	at 50 F	z and	ee-phas 500 V			Opera- tional current I _e (at 40 °C)	Versio	on - -		Article No.	Price per PU			
A DC array	kW	kW	kW	kW	kW	А	NO	NC	V					

DC operation · DC economy circuit²

Size 14

IA1 IA2	14/	 	\ - \ \	61 71 83 7 - 7 - 1 62 72 84										
630	200	335	434	600		700	3	3	24 DC	С	3TF6833-1DB4	1	1 unit	41B
					600	700	3	3	24 DC	С	3TF6833-8DB4	1	1 unit	41B
820	260	450	600	800		910	3	3	24 DC	С	3TF6933-1DB4	1	1 unit	41B
					800	910	3	3	24 DC	С	3TF6933-8DB4	1	1 unit	41B

AC operation 50/60 Hz with DC economy circuit³⁾⁴⁾ For AC operation which is subject to strong interference

Size 14

O,ZC	, ,													
IA1 IA2	1 / ₁ / ₁	<u>{</u>	\ '- \ '- \	61 71 83 * - * 1 62 ₇₂ ₈₄										
630	200	335	434	600		700	3	3		C A C	3TF6833-1QG7 3TF6833-1QL7 3TF6833-1QV7	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
					600	700	3	3	220 240 AC	С	3TF6833-8QL7	1	1 unit	41B
820	260	450	600	800		910	3	3	110 120 AC 220 240 AC 380 420 AC	C A C	3TF6933-1QG7 3TF6933-1QL7 3TF6933-1QV7	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
					800	910	3	3	110 120 AC 220 240 AC	СС	3TF6933-8QG7 3TF6933-8QL7	1 1	1 unit 1 unit	41B 41B

For footnotes, see page 3/133.

For accessories, see page 3/135, for spare parts, see page 3/136.

Rated control supply voltages (change of the 10th and 11th digits of the Article No.)

Rated control supply voltage $U_{\rm S}$	Contactor type	3TF6844C, 3TF6944C	Rated control supply voltage $U_{\rm S}$	Contactor type	3TF6833D, 3TF6933D
	Size	14		Size	14
AC operation			 DC operation		
Solenoid coils for 50/60) Hz		Solenoid coils for DC e	conomy circuit	
110 132 V AC		F7	24 V DC		B4
200 240 V AC		M7	110 V DC		F4
230 277 V AC		P7	125 V DC		G4
380 460 V AC		Q7	220 V DC		M4
500 600 V AC		S7	230 V DC		P4

3TF6 vacuum contactors, 3-pole, 335 ... 450 kW

Accessories

Accessories									
	Varistors ²⁾	Rated control supply voltage $U_{\rm S}$			Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
		V AC	V DC						
Surge suppressors	s ¹⁾ · Varistors								,
	Varistors ²⁾		24 48	С	3TX7572-3G		1	1 unit	41B
	For DC economy circuit; for lateral snapping		48 127	D	3TX7572-3H		1	1 unit	41B
3TX7572-3.	onto auxiliary switches		127 240	С	3TX7572-3J		1	1 unit	41B

 $^{^{1)}\,}$ The surge suppressor (varistor) is included in the scope of supply of the 3TF68 and 3TF69 contactors with AC operation.

²⁾ Includes the peak value of the alternating voltage on the DC side.

	Version	DT	Screw terminals		PU (UNIT, SET, M)	PS*	PG
			Article No.	Price per PU			
Solid-state compa	atible auxiliary switch blocks with screw terminals						
5TY7561-1.	For operation in dusty atmospheres and in solid-state circuits with rated operational currents $I_{\rm e}$ AC-14 and DC-13 of 1 300 mA at 3 60 V For lateral mounting onto contactors With 1 changeover contact. 2nd auxiliary switch block, left or right (replacement for 3TY6561-1U, 3TY6561-1V) Mounting on the leftMounting on the right $\begin{bmatrix} 51 & 62 & 64 & 62 & 64 \end{bmatrix}$	•	3TY7561-1UA00		1	1 unit	41B
Terminal covers	152 154 162 164						
	For protection against inadvertent contact with exposed busbar connections (for 3TF68 contactor) Can be screwed onto free screw end on middle connecting bar (for 3TF69 contactor). 2 units required per contactor.	ВВ	3TX7686-0A 3TX7696-0A		1 1	1 unit 1 unit	41B 41B
3TX76.6-0A	(1 set = 2 units)						
	ng (star jumpers), 3-pole						
	Link for paralleling without connection terminals ²⁾	С	3TX7680-0D		1	1 unit	41B
	Cover plates for links for paralleling A cover plate must be used in order to protect against inadvertent contact with exposed busbar connections (EN 50274).	С	3TX7680-0E		1	1 unit	41B
Box terminals for	laminated copper bars						
	Without auxiliary conductor connection for 3TF68 (1 set = 3 units) With single covers for protection against inadvertent contact (EN 50274)	D	3TX7570-1E		1	1 unit	41B
	With auxiliary conductor connection for 3TF69 (1 set = 3 units)						
	Conductor cross-sections for auxiliary conductors: • Solid 2 x (0.75 2.5) mm ² • Finely stranded with end sleeve 2 x (0.5 2.5) mm ² • Solid or stranded 2 x (18 12) AWG • Tightening torque 0.8 1.4 Nm (7 12 lb.in)	D	3TX7690-1F		1	1 unit	41B

¹⁾ Technical specifications for coupling links, see "Accessories for 3RT10 Contactors", page 3/113.

²⁾ The link for paralleling can be reduced by one pole.

3TF6 vacuum contactors, 3-pole, 335 ... 450 kW

Spare parts												
	Version	Auxiliary	contac	cts			DT	Screw terminals		PU	PS*	PG
		Version			Connection	ns				(UNIT, SET, M)		
		\I	Ļ	<u> </u>				Article No.	Price per PU			
				1								
Auxiliary switch	blocks	NO N	VC	NC								
, , , ,	For lateral mounti	ng			Left	Right						
TORK- I	1st auxiliary switch (replacement for 3		/-1B)					3TY7561-1AA00		1	1 unit	41B
	()	1 1			13 21	31 43						
10 1					\ \	 						
3TY7561-1.A00	1at auviliary awitab	blook			14 22	l32 l44	•	3TY7561-1EA00		1	1 unit	41B
	1st auxiliary switch	1 -	_	1	13 25	35 43		3117361-1EA00		1	i uiiit	410
					\ /	7-1						
					14 26	36 44						
	2nd auxiliary switch (replacement for 3		/-1L)				С	3TY7561-1KA00		1	1 unit	41B
		1 1	1		53 61	71 83						
					\\\ \f	*1						
	For reconnection	of the soil	with F)C 000n	54 62	l72 l84						
	ror reconnection		- WILLI	1	∘B1 25			3TY7681-1G		1	1 unit	41B
					7							
					∘B2 26							
	Version					For type	DT	Article No.	Price per PU	PU (UNIT,	PS*	PG
									'	SÈT, M)		
Solenoid coils												
-	AC operation ¹⁾											
	The solenoid coils against overvoltage					3TF68 3TF69		3TY7683-0C 3TY7693-0C				
	electronics. DC operation ¹⁾ · D	C econom	v circ	uit				0117000 00				
	The solenoid coils	for size 14	•		thout	3TF68		3TY7683-0D				
	reversing contactor	·.				3TF69		3TY7693-0D				
3TY76.3-0												
Vacuum interrup	ters											
	Set with 3 vacuum In order to ensure r					3TF68 3TF69	B C	3TY7680-0B 3TY7690-0B		1 1	1 unit 1 unit	41B 41B
	only original repla						C	3117030-05		ļ	i uiiit	410
 Rated control support of the article numb 	ly voltages for soleno er must be supplemer	id coils: The	e 10th dina ta	and 11th	n digits 134.							
			. 5	1 - 1 - 1								
	Version				Rated c	ontrol supply	DT	Screw terminals	(1)	PU (UNIT,	PS*	PG
					voltage	O_S				SET, M)		
					V AC			Article No.	Price per PU			
3TC44 reversing												
	Complete with serion cable and plug-in of		1 m co	onnecting	g 110 1 220 2		D D	3TY7684-0QG7 3TY7684-0QL7		1 1	1 unit 1 unit	41B 41B
	For 3TF68Q, 3T				380 4	120	D	3TY7684-0QV7		1	1 unit	41B
Solenoid coils fo	r main contactor, y For 3TF68Q	with recti	fier b	ridge	110 1	20	D	3TY7683-0QG7		1	1 unit	41B
	1 01 011 00Q				220 2	240	D	3TY7683-0QL7		1	1 unit	41B
	For 3TF69Q				380 4 110 1		X D	3TY7683-0QV7 3TY7693-0QG7		1	1 unit 1 unit	41B 41B
					220 2 380 4	240	D D	3TY7693-0QL7 3TY7693-0QV7		1 1	1 unit 1 unit	41B 41B
					, '	-	-					



3TB5 contactors with DC solenoid system, 3-pole, 55 ... 200 kW

Overview

The 3TB5 contactors are suitable for use in any climate.

They are finger-safe according to EN 50274. Terminal covers may have to be fitted onto the connecting bars, depending on the configuration with other devices; see Accessories and Spare Parts on page 3/143.

Auxiliary contacts

The contactors are equipped with two lateral auxiliary switch blocks each with 1 NO + 1 NC contact. Further auxiliary switch blocks cannot be fitted to the DC-operated contactors.

Technical specifications

Contactor	Туре	3TB50		3TB52	3TB56
	Size	6		8 12	
Rated data of the auxiliary contacts		Accordin	ng to IEC 60947-5-1		
Rated insulation voltage <i>U</i> _i (pollution degree 3)	V	690			
Conventional thermal current $I_{\rm th}$ = Rated operational current $I_{\rm e}/{\rm AC}$ -12	А	10			
AC load Rated operational current $I_{\rm e}/{\rm AC-15/AC-14}$ • For rated operational voltage $U_{\rm e}$					
- At 24 V - At 110 V - At 125 V - At 220 V - At 230 V	A A A A	10 10 10 6 5.6			
- At 380 V - At 400 V - At 500 V - At 660 V - At 690 V	A A A A	4 3.6 2.5 2.5			
DC load Rated operational current I_e/DC-12 • For rated operational voltage U _e					
- At 24 V - At 60 V - At 110 V - At 125 V	A A A	10 10 3.2 2.5		10 10 8 6	
- At 220 V - At 440 V - At 600 V	A A A	0.9 0.33 0.22		2 0.6 0.4	
Rated operational current $I_{\rm e}/{\rm DC}$ -13 • For rated operational voltage $U_{\rm e}$			Auxiliary contacts with delayed NC contact:		Auxiliary contacts with delayed NC contact:
- At 24 V - At 60 V - At 110 V - At 125 V	A A A	10 5 1.14 0.98	10 7 3.2 2.5	10 5 2.4 2.1	10 4 1.8 1.6
- At 220 V - At 440 V - At 600 V	A A A	0.48 0.13 0.075	0.9 0.33 0.22	1.1 0.32 0.21	0.9 0.27 0.18
® and ® rated data of the auxiliary contacts					
Rated voltage, max.	V AC	600			
Switching capacity		A 600, P	600		

3TB5 contactors with DC solenoid system, 3-pole, 55 ... 200 kW

Contactor

Contact endurance of the main contacts

The characteristic curves show the contact endurance of the contactors when switching resistive and inductive AC loads (AC-1/AC-3) depending on the breaking current and rated operational voltage. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

The rated operational current I_e complies with utilization category AC-4 (breaking six times the rated operational current) and is intended for a contact endurance of approx. 200 000 operating cycles.

If a shorter contact endurance is sufficient, the rated operational current $I_e/AC-4$ can be

If the contacts are used for mixed operation, i.e. normal switching (breaking the rated operational current according to utilization category AC-3) in combination with intermittent inching (breaking several times the rated operational current according to utilization category AC-4), the contact endurance can be calculated approximately from the following equation:

$$X = \frac{A}{1 + \frac{C}{100} \left(\frac{A}{B} - 1\right)}$$

Characters in the equation:

- Contact endurance for mixed operation in operating cycles
- Contact endurance for normal operation $(I_a = I_e)$ in operating cycles
- B Contact endurance for inching (I_a = multiple of I_e) in operating cycles
- Inching operations as a percentage of total switching operations

3TB5

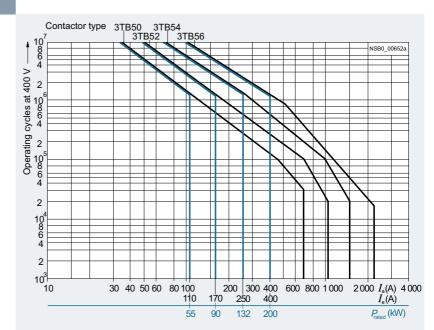


Diagram legend:

 P_{rated} = Rated power for squirrel-cage motors at 400 V I_{a} = Breaking current I_{e} = Rated operational current



General data Permissible mounting position, installation instructions*) The contactors are designed for operation on a vertical mounting surface. Mechanical endurance Electrical endurance Rated insulation voltage U _i V 1000 Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N Mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. Permissible ambient temperature • During operation °C -25 +55 • During storage) x 252 x 282
General data Permissible mounting position, installation instructions 1) The contactors are designed for operation on a vertical mounting surface. Mechanical endurance Operating cycles 10 million Electrical endurance 2) Rated insulation voltage U _i V 1000 Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N Mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. Permissible ambient temperature • During operation °C -25 +55 • During storage °C -50 +80	0 x 252 x 282
Permissible mounting position, installation instructions 1) The contactors are designed for operation on a vertical mounting surface. Mechanical endurance Departing cycles 10 million Electrical endurance Rated insulation voltage U _i V 1000 Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N Mirror contacts A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. Permissible ambient temperature During operation C -25 +55 During storage C -50 +80	
Installation instructions 1) The contactors are designed for operation on a vertical mounting surface. Mechanical endurance Electrical endurance Electrical endurance Rated insulation voltage U _i Protective separation between the coil and the main contacts vertical endurance Protective separation between the coil and the main contacts vertical endurance vertical endurance vertical endurance Rated insulation voltage U _i V 1000 Protective separation between the coil and the main contacts vertical endurance vertic	
Mechanical endurance Operating cycles 10 million Electrical endurance Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N Mirror contacts A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. Permissible ambient temperature During operation C -25 +55 During storage Operating cycles 10 million Poperation Y 1000 Yes, acc. to IEC 60947-4-1, Appendix F Yes, acc. to IEC 60947-4-1, Appendix F C -25 +55	
Electrical endurance Rated insulation voltage U _i V 1000 Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N Mirror contacts A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. Permissible ambient temperature • During operation C -25 +55 • During storage 2) Key 1000 C 990 C -25 +55 C -50 +80	
Rated insulation voltage U _i Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N Mirror contacts A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. Permissible ambient temperature • During operation C -25 +55 • During storage V 1000 Yes, acc. to IEC 60947-4-1, Appendix F Yes, acc. to IEC 60947-4-1, Appendix F C -25 +55	
Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N Mirror contacts A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. Permissible ambient temperature • During operation C -25 +55 • During storage • During storage	
acc. to IEC 60947-1, Appendix N Mirror contacts A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. Permissible ambient temperature • During operation C -25 +55 • During storage C -50 +80	
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact. Permissible ambient temperature • During operation °C -25 +55 • During storage °C -50 +80	
simultaneously with an NO main contact. Permissible ambient temperature • During operation °C -25 +55 • During storage °C -50 +80	
• During operation °C -25 +55 • During storage °C -50 +80	
• During storage °C -50 +80	
- 3	
Degree of protection acc. to IEC 60947-1, Appendix C IP00/open (where applicable, use additional terminal covers)	
Touch protection acc. to EN 50274 Finger-safe only for vertical contact from the front	
Shock resistance (rectangular pulse) g/ms 5/10 5.9/10 5.9/10 5.9/10	10
Short-circuit protection	
Main circuit Fuse links, gG operational class: LV HRC, type 3NA; DIAZED, type 5SB	
• Type of coordination "1" A 250 315 400 630)
• Type of coordination "2" A 224 250 315 500)
Auxiliary circuit	
Short-circuit test	
• with fuse links of operational class gG: A LV HRC, type 3NA; DIAZED, type 5SB with short-circuit current $I_{\rm k}$ = 1 kA according to IEC 60947-5-1	
• with miniature circuit breakers with C characteristic A 10 with short-circuit current $I_{\rm k}$ = 400 A	
Control	
Solenoid coil operating range $0.8 \dots 1.1 \times U_s$	
Power consumption of the solenoid coils (for cold coil and 1.0 x U_s)	
• Closing = Closed W 25 30 60 86	
Operating times for 0.8 1.1 x U _s (The values apply up to and including 20 % undervoltage, Total break time = Opening delay + Arcing time 10 % overvoltage, as well as when the coil is cold and warm)	
 Closing delay Opening delay³ Arcing time Instruction of the property of	
Operating times for 1.0 x $U_{\rm S}$	
) 250 95

For reversing duty, deviations from the vertical axis are not permitted.
 See "Contact endurance of the main contacts", page 3/138.

³⁾ The opening delay times can increase if the contactor coils are damped against voltage peaks.

Contactor	Type	3TB50	3TB52	3TB54	3TB56
Main circuit	Size	6	8	10	12
Load rating with AC					
Utilization category AC-1,					
Switching resistive loads					
Rated operational current I _e					
- At 40 °C up to 690 V - At 55 °C up to 690 V	A A	170 160	230 200	325 300	425 400
Rated power for AC loads ¹⁾ with p.f. = 0.95 (at 55 °C)					
- At 230 V	kW	61	76	114	152
- At 400 V - At 500 V	kW kW	105 138	132 173	195 260	262 345
- At 690 V	kW	183	228	340	455
$ullet$ Minimum conductor cross-sections for loads with $I_{ m e}$	mm²	70	95	185	240
Utilization categories AC-2 and AC-3		2)			
Utilization category AC-4 (for $I_a = 6 \times I_e$) The following applies to a contact endurance of about 200 00	M operating cycles:				
 Rated operational current I_e 	A A	52	72	103	120
Rated power for squirrel-cage motors with 50 Hz and 60 Hz		02		.00	.20
- At 230 V	kW	15.6	21	31	37.5
- At 400 V - At 500 V	kW kW	27 35	37 48	55 72	65 85.5
- At 690 V	kW	45	64	92	106
 Max. permisible operational current I_e/AC-4 At 400 V 	А	110	170	250	400
Load rating with DC					
Utilization category DC-1, switching resistive loads ($L/R \le 1$ ms)					
Rated operational currents I _e (at 55 °C)		400	000		400
- 1 conducting path	Up to 24 V A 60 V A	160 80	200 80	300 300	400 330
	110 V A	18	18	33	33
	220 V A 440 V A	3.4 0.8	3.4 0.8	3.8 0.9	3.8 0.9
	600 V A	0.5	0.5	0.6	0.6
- 2 conducting paths in series	Up to 24 V A 60 V A	160 160	200 200	300 300	400 400
	110 V A	160	200	300	400
	220 V A	20	20	300	400
	440 V A 600 V A	3.2 1.6	3.2 1.6	4 2	4 2
- 3 conducting paths in series	Up to 24 V A	160	200	300	400
	60 V A 110 V A	160 160	200 200	300 300	400 400
	220 V A	160	200	300	400
	440 V A 600 V A	11.5 4	11.5 4	11 5.2	11 5.2
Utilization category DC-3/DC-5,	000 V A	7	7	U.L	U.L
shunt-wound and series-wound motors ($L/R \le 15$ ms)					
 Rated operational currents I_e (at 55 °C) 1 conducting path 	Up to 24 V A	16	16	35	35
- i conducting patri	60 V A	7.5	7.5	11	11
	110 V A	2.5	2.5	3	3
	220 V A 440 V A	0.6 0.17	0.6 0.17	0.6 0.18	0.6 0.18
	600 V A	0.12	0.12	0.125	0.125
- 2 conducting paths in series	Up to 24 V A 60 V A	160 160	200 200	300 300	400 400
	110 V A	160	200	300	400
	220 V A	2.5	2.5	2.5 0.65	2.5
	440 V A 600 V A	0.65 0.37	0.65 0.37	0.65	0.65 0.37
- 3 conducting paths in series	Up to 24 V A	160	200	300	400
	60 V A 110 V A	160 160	200 200	300 300	400 400
	220 V A	160	200	300	400
	440 V A 600 V A	1.4 0.75	1.4 0.75	1.4 0.75	1.4 0.75
4)	000 V / (2) 0 10 1	0.70	0.70	0.70

¹⁾ Industrial furnaces and electric heaters with resistance heating, etc. (increased power consumption on heating up has been taken into account).

²⁾ See "Selection and Ordering Data", page 3/142.



Contactor	Type	3TB50	3TB52	3TB54	3TB56
Contactor	Size	6	8	10	12
Main circuit					
Switching frequency					
Switching frequency z in operating cycles/hour					
 Contactors without overload relays 					
- AC-1	h ⁻¹	1 000			
- AC-2 - AC-3	h ⁻¹ h ⁻¹	500 500			
- AC-4	n-1	250			
 Contactors with overload relays (mean value) 	h ⁻¹	15			
Conductor cross-sections					
Main conductors:		Screw to	erminals		
Finely stranded with cable lug	mm ²	16 70	35 95	50 240	50 240
Stranded with cable lug	mm ²	25 70	50 120	70 240	70 240
Busbars Terminal screw	mm	15 x 3 M6	20 x 3 M8	25 x 5 M10	2 x (25 x 3) M10
Auxiliary conductors:					0
• Solid	mm ²	1 2.5			
• Finely stranded with end sleeve	mm ² mm ²	0.75 1.5 2 x 1 2.5			
Pin-end connector (DIN 46231) Protective conductors:	111111	2 X T 2.5			
Stranded with cable lug	mm ²		25 70	35 70	50 120
® and ® rated data					
® rated data					
Uninterrupted current					
- Open	A	150	170	240	300
- Enclosed	А	135	153	215	270
 Rated power for three-phase motors at 60 Hz (enclosed) 					
- 115 V - 230 V	hp hp	25 50	30 60	40 75	50 100
- 460 V	hp	100	120	150	200
- 575 V	hp	125	160	200	250
Overload relays	Type	3RB2056	3RB2056	3RB2066	3RB2066
- Setting range	А	50 200	50 200	50 250	200 540
NEMA/EEMAC size					E
ContactorsStarters (= contactors + overload relay, enclosed)		4	4 4	4 4	5 5
(1) rated data					
Uninterrupted current					
- Open - In enclosure	A A	150 135	150 135	240 215	390 350
Rated power for three-phase motors at 60 Hz	A	100	100	213	330
- 115 V	hp	25	25	30	
- 230 V	hp	50	50	75	125
- 460 V - 575 V	hp hp	100 125	100 125	150 200	250 300 ¹⁾
Overload relays	Type	3RB2056	3RB2056	3RB2066	3RB2066
- Setting range	A	50 200	50 200	50 250	200 540
NEMA/EEMAC size					
- Contactors		4	4	4	5
- Starters (= contactors + overload relay, enclosed)		3	4	4	5
Short-circuit protection devices CLASS RK5 fuses	٨	400	400	450	600
CLASS HAS fuses Circuit breakers acc. to UL 489	A A	400 175	400 175	450 250	600 600
On oan products doo. to OL 400	^	170	110	200	000

¹⁾ At 575/600 V AC max. rated motor current 325 A and motor starting current 3 250 A.

3TB5 contactors with DC solenoid system, 3-pole, 55 ... 200 kW

Selection and ordering data

Main conductors: Busbar connections Auxiliary and control conductors: Screw terminals



											31000				
Size	Rated dat AC-2 and	2 and AC-3 (up to 55 °C) AC era- Ratings ¹⁾ of Op	AC-1	Auxili		Rated control supply voltage $U_{\rm s}$	DT	Screw terminals	+	PU (UNIT, SET, M)	PS*	PG			
	Operational current I_e up to	three-p	ohase m	otors		Operational current I _e (at 40 °C)	Versi	on			Article No.	Price per PU			
	690 V	230 V	400 V	500 V	690 V			I,							
							\	7							
	Α	kW	kW	kW	kW	Α	NO	NC	V DC						
DC o	peration														
A1 A2	1/L1 3/L2 2/T1 4/T2	₹ -	- }- }-\												
6	110	37	55	75	90	170	2	2	24	Α	3TB5017-0BB4		1	1 unit	41B
8	170	55	90	110	132	230	2	2	24	Α	3TB5217-0BB4		1	1 unit	41B
10	250	75	132	160	200	325	2	2	24	С	3TB5417-0BB4		1	1 unit	41B
12	400	115	200	255	355	425	2	2	24	С	3TB5617-0BB4		1	1 unit	41B
1) Cui	do volvo for	. 1 polo	otondor	d motor	o at EO L	1- 400 V AC	Thora	otual	For acces	oori	22 222 222 2/1/2				

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

For accessories, see page 3/143. For spare parts, see page 3/144.

Options

Rated control supply voltages (change of the 10th and 11th digits of the Article No.)

Rated control supply voltage $U_{\rm S}$	 3TB50, 3TB52, 3TB54 6, 8, 10	3TB56 12		
DC operation				
24 V DC	B4	B4		
110 V DC	F4			
220 V DC	M4	M4		



Accessories											
Accessories	For contactors		Version	Rated control supply DT voltage $U_{\rm S}$			Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Size	Туре		V AC	V DC						
Surge suppressor			0								
3TX7462-3.	6	3TB50	Varistors ¹⁾ for sticking onto the contactor base or for mounting separately	24 48 48 127 127 240 240 400 400 600		B A B B	3TX7462-3G 3TX7462-3H 3TX7462-3J 3TX7462-3K 3TX7462-3L		1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
3TX7522-3.	8 12	3TB52 3TB56	Varistors 1) for separate screw fixing or snapping onto TH 35 standard mounting rail	 	24 70 70 150 150 250	В	3TX7522-3G 3TX7522-3H 3TX7522-3J		1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B
Surge suppressors											
3TX7522-3.	6	3TB50	RC elements For lateral snapping onto auxiliary switch or TH 35 standard mounting rail	24 48 48 127 127 240 240 400 400 600	 	B B B B	3TX7522-3R 3TX7522-3S 3TX7522-3T 3TX7522-3U 3TX7522-3V		1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B
Surge suppressors	s · Diod	es									
3TX7462-3.	6 12	3TB50 3TB56	Diode assemblies ²⁾ (diode and Zener diode) for DC solenoid system, for sticking onto the contactor base or for mounting separately	<u></u>	24 250	A	3TX7462-3D		1	1 unit	41B

 $^{^{1)}\,}$ Includes the peak value of the alternating voltage on the DC side.

²⁾ Not for DC economy circuit.

	For cont	tactors	Version	DT	Screw terminals	(1)	PU (UNIT, SET, M)	PS*	PG	
	Size	Туре				Article No.	Price per PU			
Terminal covers										
	6	3TB50	For protection against inadvertent contact	M6	В	3TX6506-3B		1	1 unit	41B
	8	3TB52	with exposed busbar connections	M8	В	3TX6526-3B		1	1 unit	41B
	10 and 12	3TB54, 3TB56	Can be screwed on free screw end For covering one busbar connection (1 set = 6 units)	M10	В	3TX6546-3B		1	1 unit	41B
3TX6526-3B										

3TB5 contacto	ors with I	DC solenc	old sy	stem,	3-pole	e, 55 200) kW						
Spare parts													
	For contactors Auxiliary contacts						DT	Screw terminals		PU (UNIT,	PS*	PG	
			Versio	n		Connections					SET, M)		
			\I	<u> </u>	<u> </u>				Article No.	Price per PU			
	Size	Туре	I NO	I NC	I NC								
Auxiliary switch													
4.5	For latera	al mounting 3TB50	(renla	cement	for 3TV6	Left 5501-1A/-1B)	Right						
	Ü	31230	1	1		13 21 	31 43	•	3TY6501-1AA00		1	1 unit	41B
3TY6561-1A	8 12	3TB52 3TB56	1	1		13 21 14 22		•	3TY6561-1A		1	1 unit	41B
			1	1			31 43 	•	3TY6561-1B		1	1 unit	41B
			1		1		35 43 	•	3TY6561-1E		1	1 unit	41B
	For contact	ctors	Versio	n				DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Size	Туре											
Contacts with f	In order to only origi	ts o ensure relia nal replacem	ent co	ntacts s	hould be	e used.							
3TY6520-0A	6 8 10 12	3TB50 3TB52 3TB54 3TB56	(1 set eleme		ving and	6 fixed switc	hing	B B B	3TY6500-0A 3TY6520-0A 3TY6540-0A 3TY6560-0A		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
Arc chutes	6 8 10 12	3TB50 3TB52 3TB54 3TB56	1 arc	chute, 3	-pole			* * * *	3TY6502-0A 3TY6522-0A 3TY6542-0A 3TY6562-0A		1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
3TY6502-0A Solenoid coils	DC opera												
3TY65.	6 8 10 12	3TB50 3TB52 3TB54 3TB56							3TY6503-0B 3TY6523-0B 3TY6543-0B 3TY6563-0B		On reque On reque On reque On reque	st st	

¹⁾ Rated control supply voltages for solenoid coils: The 10th and 11th digit of the article number must be supplemented according to page 3/142.

3TF2 contactors, 3-pole, 2.2 ... 4 kW

Overview

Standards

IEC 60947-1, EN 60947-1, IEC 60947-4-1, EN 60947-4-1,

IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The contactors are suitable for use in any climate.

The contactors with screw terminals are finger-safe acc. to EN 50274.

Connection methods

The contactors are available in versions with screw terminals, 6.3 mm plug-in terminals and solder pin connections for soldering in printed circuit boards.

Technical specifications

3TF2 Contactor Туре


Endurance of the auxiliary contacts

The contact endurance for utilization category AC-12 or AC-15/AC-14 depends mainly on the breaking current. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

Diagram legend:

 $I_a = Breaking current$

 $\vec{I_e}$ = Rated operational current

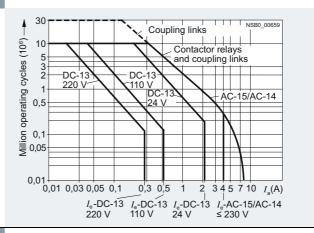

Contact endurance of the main contacts

The characteristic curves show the contact endurance of the contactors when switching inductive AC loads (AC-3) depending on the breaking current and rated operational voltage. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

The rated operational current I_e complies with utilization category AC-4 (breaking six times the rated operational current) and is intended for a contact endurance of approx. 200 000 operating cycles. If a shorter contact endurance is sufficient, the rated operational current $I_e/AC-4$ can be increased

If the contacts are used for mixed operation, i.e. normal switching (breaking the rated operational current according to utilization category AC-3) in combination with intermittent inching (breaking several times the rated operational current according to utilization category AC-4). the contact endurance can be calculated approximately from the following equation:

$$X = \frac{A}{1 + \frac{C}{100} \left(\frac{A}{B} - 1\right)}$$

Characters in the equation:

X =Contact endurance for mixed operation in operating cycles

A = Contact endurance for normal operation

 $(I_a = I_e)$ in operating cycles B = Contact endurance for inching

 $(I_a = \text{multiple of } I_e)$ in operating cycles C = Inching operations as a percentage of total

switching operations

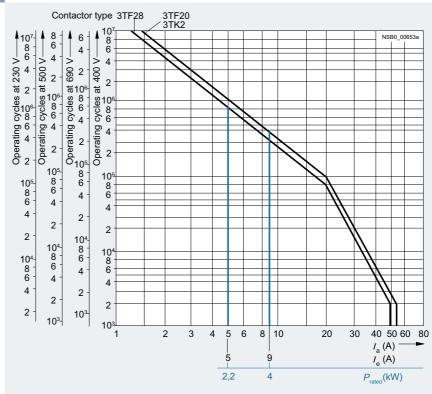


Diagram legend:

 P_{rated} = Rated power for squirrel-cage motors at 400 V

= Breaking current

= Rated operational current

Туре			3TF20, 3TF28	3TF22, 3TF29
Size			00	00
Dimensions (W x H x D)		mm	45 x 48 x 63	
With mounted auxiliary switch block	W.	mm	45 x 48 x 91	45 x 48 x 91
With 3TX4490 surge suppressor	- 	mm	45 x 48 x 88	45 x 48 x 116
General data				
Permissible mounting position			Any	
Mechanical endurance			7 tily	
AC operation	Operatir	ng cycles	10 million	
DC operation	Operatir	ng cycles	30 million	
Auxiliary switch block	Operatir	ng cycles	10 million	
Rated insulation voltage U _i				
(pollution degree 3) • Screw terminals		V	690	690 ¹⁾
Flat connectors 6.3 mm x 0.8 mm		V	500	
Solder pin connections		V	500	
Rated impulse withstand voltage U _{imp}				
(pollution degree 3) • Screw terminals		kV	6	6
Flat connectors 6.3 mm x 0.8 mm		kV kV	6	
Solder pin connections		kV	6	
Protective separation between coil and main contacts		V	Up to 300	
(according to IEC 60947-1, Appendix N)				
Mirror contacts	<u></u>			
A mirror contact is an auxiliary NC contact that cannot be	closed simulta-		Yes, this applies to both the basic	Yes, acc. to IEC 60947-4-1,
neously with an NO main contact.			unit as well as to between the basic	Appendix F and SUVA
			unit and the mounted auxiliary switch block acc. to IEC 60947-4-1,	
			Appendix F	
Permissible ambient temperature ²⁾				
During operation		°C	-25 +55	
During storage		°C	-55 +80	
Degree of protection acc. to IEC 60947-1 Appendix C			IP00/open	
Connection range for screw terminals			IP20	
Touch protection acc. to EN 50274			Finger-safe for screw terminals	
Shock resistance				
Without 3TX44 auxiliary switch block				
- Rectangular pulse	AC operation	g/ms	8.3/5 and 5.2/10	
	DC operation	<i>g</i> /ms	11.3/5 and 9.2/10	
- Sine pulse	AC operation		13/5 and 8/10	
	DC operation	<i>g</i> /ms	17.4/5 and 12.9/10	
 With 3TX44 auxiliary switch block 				
- Rectangular pulse	AC operation		5/5 and 3.6/10	5/5 and 3.6/10
	DC operation	•	9/5 and 6.9/10	9/5 and 7.3/10
- Sine pulse	AC operation		7.8/5 and 5.6/10	7.8/5 and 5.6/10
	DC operation	<i>g</i> /ms	13.9/5 and 10.1/10 3)	14/5 and 11/10
Conductor cross-sections			3)	
Short-circuit protection for contactors without	overload rela	ays		
Main circuit ⁴⁾				
Fuse links, operational class gG:				
LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5 according to IEC 60947-4-1	SE			
- Type of coordination "1"		Α	25	
- Type of coordination "2" ⁵⁾		Α	10	
- Weld-free		А	10	
Miniature circuit breaker with C characteristic		Α	10	
Auxiliary circuit				
Short-circuit test				
• with fuse links of operational class gG:		Α	6	
DIAZED, type 5SB; NEOZED, type 5SE	4			
with short-circuit current $I_{\rm k}$ = 1 kA acc. to IEC 60947-5-	I			
1) Auxiliary contacts 500 V.		4	According to excerpt from IEC 6094	7-4-1
²⁾ Applies to 50/60 Hz coil:			Type of coordination "1":	avarland ralay is permissible
At 50 Hz, 1.1 x U_s , , side-by-side mounting and 100 % max. ambient temperature is +40 °C.	UN period the		Destruction of the contactor and the The contactor and/or overload relay	
3) See "Conductor cross-sections" on page 3/149.			Type of coordination "2":	
occ conductor cross-sections on page 3/149.			The overload relay must not suffer a	
		į	contactor is permissible, however, if A short-circuit current of $I_q \le 6 \text{ kA}$ as	the contacts can be easily separated
		`	\cdot A short-circuit current of $I_q \le 6$ KA at	opiies to type of coordination 2.

Contactor		Туре	3TF2
Contactor		Size	00
Control			
Solenoid coil operating range	1)		0.8 1.1 x U _S
Power consumption of the sol	enoid coils (for cold coil and 1.0 x	U _s)	
Standard version:			
 AC operation, 50 Hz 	Closing P.f.	VA	15 0.41
	Closed P.f.	VA	0.41 0.42
• AC operation, 60 Hz	Closing P.f.	VA	14.4 0.36
	Closed P.f.	VA	6.1 0.46
AC operation, 50/60 Hz ¹⁾	Closing P.f.	VA	16.5/13.2 0.43/0.38
	Closed P.f.	VA	8.0/5.4 0.48/0.42
For USA and Canada:			
• AC operation, 50 Hz	Closing P.f.	VA	14.6 0.38
	Closed P.f.	VA	6.5 0.40
• AC operation, 60 Hz	Closing P.f.	VA	14.4 0.30
	Closed P.f.	VA	6.0 0.44
• DC operation	Closing = Closed	W	3
Permissible residual current o	of the electronic circuit $^{2)}$ (with 0 sig		
	AC operationDC operation	mA mA	$\leq 3 \times (230 \text{ V}/U_s)$ $\leq 1 \times (230 \text{ V}/U_s)$
Operating times for 0.8 1.1 or Total break time = Opening dela			. 0
Values apply with coil in cold sta operating range	ate and at operating temperature for	r	
AC operation	Closing delay Opening delay	ms ms	5 19 2 22
- Dead interval	opening delay	1113	To use the 3TF2 AC-operated contactor in reversing an additional dead interval of 50 ms is required along with an NC contact interlock.
DC operation	Closing delay Opening delay	ms ms	16 65 2 5
Arcing time		ms	10 15
Operating times for 1.0 x $U_s^{(3)}$			
AC operation	Closing delay Opening delay	ms ms	5 18 3 21
- Dead interval			To use the 3TF2 AC-operated contactor in reversing an additional dead interval of 50 ms is required along with an NC contact interlock.
DC operation	Closing delay Opening delay	ms ms	19 31 3 4
Arcing time		ms	10 15

Applies to 50/60 Hz coil: At 50 Hz, 1.1 x $U_{\rm S}$, side-by-side mounting and 100 % ON period the max. ambient temperature is +40 °C.

The 3TX4490-1J additional load module is recommended for higher residual currents; see Accessories, page 3/154.

³⁾ The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assembly 2 to 6 times, varistor +2 to 5 ms).

0.1.1			07500	OTEGS A	OTF00 C
Contactor	Туре		3TF28, 3TF29	3TF200, 3TF220	3TF203, 3TF206, 3TF207
BB-1	Size		00	00	00
Main circuit					
Load rating with AC					
Utilization category AC-1 Switching resistive loads					
• Rated operational current $I_{\rm e}$ (at 40 °C)	Up to 400/380 V 690/660 V	A A	18 18	18 18	18
• Rated operational current $I_{\rm e}$ (at 55 °C)	400/380 V 690/660 V	A A	16 16	16 16	16
• Rated power of AC loads P.f. = 1	At 230/220 V 400/380 V 500 V 690/660 V	kW kW kW	6.0 10 13 17	6.0 10 13 17	6.0 10 13
$ullet$ Minimum conductor cross-section for loads with $I_{ m e}$	555,555	mm ²	2.5	2.5	2.5
Utilization categories AC-2 and AC-3					
$ullet$ Rated operational current $I_{ m e}$	Up to 220 V 230 V 380 V 400 V 500 V 660 V	A A A A A	5.1 5.1 5.1 5.1 4.8 4.8	9.0 9.0 9.0 8.4 6.5 5.2	9.0 9.0 9.0 8.4 6.5
Rated power for motors with slipring or squirrel cage at 50 and 60 Hz and	690 V At 110 V 115 V 120 V	A kW kW kW	4.8 0.7 0.7 0.7	5.2 1.2 1.2 1.3	 1.2 1.2 1.3
	127 V 200 V 220 V	kW kW kW	0.7 0.8 1.2 1.3	1.4 2.2 2.4	1.4 2.2 2.4
	230 V 240 V 380 V	kW kW kW	1.4 1.5 2.2	2.5 2.6 4.0	2.5 2.6 4.0
	400 V 415 V 440 V	kW kW kW	2.2 2.5 2.5	4.0 4.0 4.0	4.0 4.0 4.0
	460 V 500 V 575 V	kW kW kW	2.7 2.9 3.2	4.0 4.0 4.0	4.0 4.0
	660 V 690 V	kW kW	3.8 4.0	4.0 4.0	
Utilization category AC-4					
(contact endurance approx. 200 000 operating cycles at	u 0.		4.0	0.0	0.0
• Rated operational current $I_e^{\ 1)}$	Up to 400 V 690 V	A A	1.9 1.4	2.6 1.8	2.6
Rated power for motors with squirrel cage at 50 and 60 Hz and	At 110 V 115 V 120 V	kW kW kW	0.23 0.24 0.26	0.32 0.33 0.35	0.32 0.33 0.35
	127 V 200 V 220 V	kW kW kW	0.27 0.42 0.47	0.37 0.58 0.64	0.37 0.58 0.64
	230 V 240 V 380 V	kW kW kW	0.49 0.51 0.81	0.67 0.70 1.10	0.67 0.70 1.10
	400 V 415 V 440 V	kW kW kW	0.85 0.93 1.0	1.15 1.20 1.27	1.15 1.20 1.27
	460 V 500 V 575 V	kW kW kW	1.0 1.1 1.0	1.33 1.45 1.30	1.33 1.45
	660 V 690 V	kW kW	0.86 0.89	1.10 1.15	
Thermal load capacity	10 s current	А	70		
Power loss per conducting path	At I _e /AC-3	W	0.3		

¹⁾ The following applies: Max. permissible rated operational current $I_e/AC-4 \cong I_e/AC-3$ up to 500 V, for reduced contact endurance and reduced switching frequency



					, 5-pole, 2.2 + kw
Contactor	Туре		3TF28, 3TF29	3TF200, 3TF220	3TF203, 3TF206, 3TF207
	Size		00	00	00
Main circuit					
Load rating with DC					
Utilization category DC-1, switching resistive loads ($L/R \le 1$ ms)					
 Rated operational currents I_e (at 55 °C) 					
- 1 conducting path	Up to 24 V 60 V 110 V	A A A	10 4 1.5	16 6 2	16 6 2
	220/240 V	A	0.6	1	1
- 2 conducting paths in series	Up to 24 V 60 V	A A	10 10	16 16	16 16
	110 V 220/240 V	A A	4 1.5	6 2	6 2
- 3 conducting paths in series	Up to 24 V	Α	10	16	16
e samual panta in conso	60 V 110 V	A A	10 10	16 16	16 16
Hallingston, and many DO 0/DO 5	220/240 V	Α	4	6	6
Utilization category DC-3/DC-5, shunt-wound and series-wound motors ($L/R \le 1$	5 ms)				
• Rated operational currents I_e (at 55 °C)	,				
- 1 conducting path	Up to 24 V	Α	4	6	6
	60 V 110 V	A A	1.8 0.3	3 0.5	3 0.5
	220/240 V	Ä		0.1	0.1
- 2 conducting paths in series	Up to 24 V	Α	6	10	10
	60 V 110 V	A A	3 1.5	5 2	5 2
	220/240 V	A	0.3	0.5	0.5
- 3 conducting paths in series	Up to 24 V	Α	10	16	16
	60 V 110 V	A A	10	16 16	16 16
	220/240 V	A	1.5	2	2
Switching frequency					
Switching frequency z in operating cycles/hour					
 Contactors without overload relays for rated operation¹⁾ 	No-load switching frequency	h ⁻¹	10000		
for rated operation /	AC-1 AC-2	h ⁻¹ h ⁻¹	1000 500		
	AC-3	h ⁻¹	1000		
• Contactors with overload relays (mean value)		h ⁻¹	15		
Conductor cross-sections					
Main and auxiliary conductors			Screw term	inals	
• Solid		mm ²	2 x (0.5 2.5), 1 2 x (20 14) AW	x 4 G, 1 x 12 AWG	
Finely stranded with end sleeve		mm^2	2 x (0.5 1.5), 1	x 2.5	
Pin-end connector (DIN 46231) Torminal corour.		mm ²	1 x 1 2.5		
Terminal screwPrescribed tightening torque for terminal screws		Nm	M3 0.8 1.3		
		lb.in	7 11	toro	
		^	• Flat connec	luis	
 When using a plug-in sleeve 6.3 – 1 Finely stranded with 6.3–2.5 		mm ² mm ²	0.5 1 1 2.5		
			Solder pin (only for pr	connections inted circuit boards)	
Solder pin cross-section		mm^2	0.8 x 1.2		
Solder pin cross-section, plug-in base		$\rm mm^2$	0.32 x 1.0		
4/					

¹⁾ Dependence of the switching frequency z' on the operational current I' and operational voltage U: $z' = z \times (I_0 I') \times (400 \text{ V/U}')^{1.5} \times 1/\text{h}$

O-ot-stor	T		27522 2	27520 2
Contactor	Туре		3TF200	3TF203, 3TF206, 3TF207
	Size		00	00
and rated data of the 3TF20 contactor	s			
Rated insulation voltage <i>U</i> _i		V AC	600	300
Uninterrupted current	Open and enclosed	Α	16	16 (10 for solder pin connection)
Maximum horsepower ratings (s and s approved values)				
Rated power for three-phase motors at 60 Hz				
- Single-phase	At 115 V	hp	0.5	
- 3 · k	200 V	hp	1	1
	230 V 460/575 V	hp hp	1.5	1
- 3-phase	At 115 V	hp		
- printer	200 V	hp	3	3 (1 for 3TF206)
	230 V 460/575 V	hp hp	3 5	3 (1 for 3TF206)
Overload relays	400/010 V	пр	0	
• Type			3UA7	
Setting range		Α	8 10	
Contestor	т.		2752	
Contactor	Type Size		3TF2	
Rated data of the auxiliary contacts accord			00	
Rated insulation voltage U_i	inig to iEO 00347-1	V	690	
(pollution degree 3)		•	030	
Conventional thermal current I_{th} = Rated operational current I_e /AC-12		А	10	
AC load				
Rated operational current I_e /AC-15/AC-14 • For rated operational voltage U_e	24 V	Α	4	
Torrated operational voltage O_{θ}	110 V	Ä	4	
	125 V	Α	4	
	220 V 230 V	A	4	
	380 V	A A	3	
	400 V	Α	3	
	500 V	A	2	
	660 V 690 V	A A	1	
DC load				
Rated operational current I _e /DC-12				
 For rated operational voltage U_e 	24 V 48 V	A A	4 2.2	
	110 V	Ā	1.1	
	125 V	Α	1.1	
	220 V	A	0.5	
	440 V 600 V	A A		
Rated operational current I _e /DC-13				
$ullet$ For rated operational voltage $U_{ m e}$	24 V	Α	2.1	
	48 V 110 V	A A	1.1 0.52	
	125 V	Α	0.52	
	220 V	Α	0.27	
	440 V 600 V	A A		
⑤, ⑤ and ► rated data of the auxiliary cor		, ·		
Rated voltage, max.		V AC	600	
Auxiliary switch blocks, max.		V AC	300	
Switching capacity			A 600, Q 300	
Uninterrupted current at 240 V AC		Α	10	



3TF2 contactors, 3-pole, 2.2 ... 4 kW

Selection and ordering data

Size 00

AC-1: Operational current I_e = 16 A (at 55 °C) Screw terminals

Rated data Utilization of		es AC-2	and AC-	3	Auxiliary co	ntacts		DT	Screw terminals		PU (UNIT, SET, M)	PS*	PG
Operational current I _e	Ratings at 50 H		e-phase	motors	Ident. No.	Version	on		Article No.	Price per PU			
At 400/ 380 V	230/ 220 V	400/ 380 V	500 V	690/ 660 V		\	 						
А	kW	kW	kW	kW		NO NO	NC						

Ident. No. 01

)—A1(+) d1/L1 d3/L2 d5/L3 21)—A2(-) 2/T1 d4/T2 6/T2 20

Contactors with screw terminals ·
For screw fixing and snap-on mounting onto TH 35 standard mounting rail



3TF28..-0...

	1(+) \displaystyle{1/L1} \displaystyle{2(-)} \displaystyle{2/T1}		
AC o	peration		
-	1.0	2.2	

9

→ A2(-	-) _{2/T1}	_{4/T2} _{6/T}	3 14	
AC ope	eration			
5	1.3	2.2	2.9	
9	2.4	4	4	

9	2.4	4	4	4	10 01	1	 1
DC op	eration						
5	1.3	2.2	2.9	3.8	10 01	1	 1

10

01

11 22

11

22

2

1

2

2

3.8

В

Α

Α

D


Ď

D

D

С

СС



1 unit

41B

41B

41B

41B

41B

41B

41B

41B

41B 41B

With permanently mounted auxiliary switch blocks

Terminal designations of the auxiliary contacts according to EN 50012 Ident. No. 11

2.9


4

2.9

3.8

4

3.8



2.2

2.2

1.3

AC operation

Ident. No. 2	22						
)_A1(+)	J1/L1	3/L2	5/L3	13	21 •	31 • \	43
A2(-)	\— — ¬	(Τ-	-	



3TF220, 3TF290

र्गिक जिल्ल	Ü	1.0
me	9	2.4
Story .	DC o	peration
	5	1.3
-00 0		

	9	2.4	4	4	4	11 22
 Guide value for starting and rawhen selecting 	ted data of the					

For accessories, see pages 3/153 and 3/154.

3TF2911-0AP0 3TF2922-0AP0

3TF2211-0AP0

3TF2222-0AP0

3TF2911-0BB4

3TF2922-0BB4

3TF2211-0BB4 3TF2222-0BB4

3TF2 contactors, 3-pole, 2.2 ... 4 kW

Size 00

AC-1: Operational current $I_{\rm e}$ = 16 A (at 55 °C) Flat connectors and solder pin connections

		, p c	0111100										
	Rated data Utilization		es AC-2	and AC	-3	Auxiliary co	ontacts		DT	Article No. Price per PU		PS*	PG
	Operational current I _e	Ratings at 50 H	s ¹⁾ of thre Iz and	ee-phas	e motors	Ident. No.	Version	on			, ,		
	At 400/ 380 V	230/ 220 V	400/ 380 V	500 V	690/ 660 V		\ \	 					
	Α	kW	kW	kW	kW		NO	NC					
	Ident. No.									Ident. No. 01			
	A1(+), A2(-)	1/L1 3/ 	/L2 5/L3 /T2 6/T3	13						A1(+) 1/L1 3/L2 5/L3 21 A2(-) 2/T1 4/T2 6/T3 22			
Contactors with 6 For screw fixing a						ındard mo	untin	g rail					
	AC opera	ation								Flat connectors			
00000	9	2.4	4	4		10 01	1	 1	D D	3TF2010-3AP0 3TF2001-3AP0	1 1	1 unit 1 unit	41B 41B
66666	DC opera	ation 2.4		4		10			0	3TF2010-3BB4		4	440
3TF203	9	2.4	4	4		01	1	1	C D	3TF2010-3BB4	1	1 unit 1 unit	41B 41B
Contactors with 6		.8 mm	flat co	nnecto	rs ·								
	AC opera	ation								ı			
TOTOTAL	9	2.4	4	4		10 01	1	1	C D	3TF2010-7AP0 3TF2001-7AP0	1 1	1 unit 1 unit	41B 41B
	DC opera												
11000	9	2.4	4	4		10 01	1	 1	C C	3TF2010-7BB4 3TF2001-7BB4	1 1	1 unit 1 unit	41B 41B
3TF207													
Contactors with s For screw fixing (connec	ctions	for prir	ited cir	cuit board	s·				_		
	AC opera	ation								Solder pin connections			
CHERT! 0	9	2.4	4	4		10 01	1	1	D D	3TF2010-6AP0 3TF2001-6AP0	1 1	1 unit 1 unit	41B 41B
He Colored Brown	DC opera	ation									_		
3TF206	9	2.4	4	4		10 01	1	1	C C	3TF2010-6BB4 3TF2001-6BB4	1 1	1 unit 1 unit	41B 41B

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

For accessories, see pages 3/153 and 3/154.

Rated control supply voltages (change of the 10th and 11th digits of the Article No.)

ratea come or cap	p.,	- (o	
Rated control supply voltage $U_{\rm S}$		Contactor type Size	•
AC operation			
Solenoid coils for AC	50 and 60 Hz		
50 Hz	60 Hz		
24 V AC 110 V AC 230/220 V AC	29 V AC 132 V AC 276 V AC		B0 F0 P0 ¹⁾
AC operation			
Solenoid coils for AC	50/60 Hz		
230 V AC			L2
DC operation			
24 V DC			B4

Rated control supply	/	Contactor type	3TF22, 3TF29
voltage $U_{\rm S}$		Size	00
AC operation			
Solenoid coils for A	AC 50 and 60 Hz		
50 Hz	60 Hz		
230/220 V AC	276 V AC		P0 ¹⁾
DC operation		•	
24 V DC			B4
4)			

 $^{^{1)}}$ Operating range at 220 V: 0.85 to 1.15 \times $U_{\rm S}$; lower operating range limit according to IEC 60947.

Please inquire about further voltages.



3TF2 contactors, 3-pole, 2.2 ... 4 kW

													•	,,	
Accessories															
	current	operatio 5/AC-14		Auxiliary of Ident. No.					Connections	DT	Screw terminals	+	PU (UNIT, SET, M)	PS*	PG
	230/ 220 V	400/ 380 V	500 V	ident. No.	\ \	 	1	}	Connections		Article No.	Price per PU			
0	Α	A	A		NO	NC	NO	NC							
Snap-on auxilia	•			r E aunilian	o o o o o	o o to o	00040	ina ta	EN 50010						
100 mm				r 5 auxiliary o. 10 (with a					EN 30012						
0000	4	3	2	11 22 23 32	 1 1 2	1 2 3 2	 	 		* * *	3TX4401-1A 3TX4412-1A 3TX4413-1A 3TX4422-1A		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41A 41A 41A 41A
3TX44A	For exp	ansion	to 3 or 5	auxiliary co					1 50005		31X4422-1A		1	Tuill	41A
	4	3	2	20	2				53 63 	•	3TX4420-2A		1	1 unit	41A
				11	1	1			53 61 54 62	•	3TX4411-2A		1	1 unit	41A
				02		2			51 61 	•	3TX4402-2A		1	1 unit	41A
				11; U			1	1	57 65 	D	3TX4411-2G		1	1 unit	41A
	4	3	2	40	4				53 63 73 83 	>	3TX4440-2A		1	1 unit	41A
				31	3	1			53 61 73 83 	•	3TX4431-2A		1	1 unit	41A
				22	2	2			53 61 71 83 54 62 72 84	•	3TX4422-2A		1	1 unit	41A
				22; 2 U			2	2	57 67 75 85 	В	3TX4422-2G		1	1 unit	41A
	For cor	ntactors		Rated convoltage $U_{\rm s}$		apply	Time (min	e settir nimum	ng range times)	DT	Screw terminals		PU (UNIT, SET, M)	PS*	PG
	Туре			V DC			s				Article No.	Price per PU			
OFF-delay device				. 50								porto			
2270	For DC short-ti		er failure	ctors for br es up to 0.8 24		g	0.25	5 or 0.5	5	Α	3TX4490-1H		1	1 unit	41B

3TX4490-1H

	For contactors	Rated control s voltage $U_{\rm S}$	supply	Power consumption of LED at $U_{\rm S}$	DT		Price per PU	PU (UNIT, SET, M)	PS*	PG
	Туре	V AC	V DC	mW				- , ,		
Surge suppressor for plugging onto		h and withou	t auxiliary sv	witch blocks						
-501	Version witho	ut LED								
3TX4490-3A	3TF20, 3TF21	24 48 48 127 127 240 240 400	24 70 70 150 150 250		B B B	3TX4490-3R 3TX4490-3S 3TX4490-3T 3TX4490-3U		1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
		400 600			В	3TX4490-3V		1	1 unit	41B
	Varistors									
	3TF20, 3TF21	≤ 48 48 127 127 240	24 70 70 150 150 250	 	B B	3TX4490-3G 3TX4490-3H 3TX4490-3J		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
		240 400 400 600	 	 	B B	3TX4490-3K 3TX4490-3L		1 1	10 units 10 units	41B 41B
	Noise suppress	ion diodes								
	3TF20, 3TF21		12 250		•	3TX4490-3A		1	1 unit	41B
	Diode assemblie For DC operation									
	3TF20, 3TF21		24 250		В	3TX4490-3B		1	1 unit	41B
	Version with L	.ED								
3TX4490-4G	Varistors 3TF20, 3TF21	24 48 48 127 127 240	12 24 24 70 70 150 150 250	10 120 20 470 50 700	B B D	3TX4490-4G 3TX4490-4H 3TX4490-4J 3TX4490-4K		1 1 1 1	1 unit 1 unit 1 unit	41B 41B 41B 41B
	Noise suppress		150 250	160 950	U	31A4450-4K		- 1	1 unit	410
	3TF20, 3TF21	 	24 70 70 150 150 250	20 470 50 700 160 950	B B B	3TX4490-4A 3TX4490-4B 3TX4490-4C		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
Additional load m for plugging onto		h and withou	t auxiliarv sv	witch blocks ¹⁾						
, 03 3				and for limiting the						
_	3TF20A, 3TF21A	230/220, 50 Hz 230, 60 Hz 230, 50/60 Hz Operating rang		 <i>U</i> _s	D	3TX4490-1J		1	1 unit	41B
Plug-in bases with width 45 mm	h solder pin co	nnections for	printed circ	uit boards,						
	Rated insulation rated impulse wit rated operational and stated of the rated of the	thstand voltage I_{e} : 6 A;	<i>U</i> _{imp} : 6 kV;	degree 3);						
OTV4404 0A	3TF203, 3TF207	For contactors	with flat conne	ectors 6.3 mm x 0.8 mm	D	3TX4491-2A		1	5 units	41A
3TX4491-2A Release tools										
Release tools	3TF27	For releasing of 3TX4491-2A pl			D	3TX4491-2K		1	1 unit	41A

 $^{^{\}rm 1)}$ Dimensions as for 3TX4490-3 surge suppressor.



SIRIUS 3RT20 coupling contactors (interface), 3-pole, up to 15 kW

Overview

DC operation

IEC 60947-1, EN 60947-1, IEC 60947-4-1, EN 60947-4-1,

IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The 3RT20 coupling contactors for switching motors are tailored to the special requirements of working with electronic controls.

The coupling contactors cannot be extended with auxiliary switch blocks.

Coupling contactors have a low power consumption and an extended solenoid coil operating range.

Depending on the version, the solenoid coils are supplied either without overvoltage damping (3RT201.-1HB4. and 3RT201.-.MB4.-0KT0) or with a diode, suppressor diode or varistor connected as standard.

Technical specifications

All technical specifications not mentioned in the table below are identical to those of the 3RT20 contactors for switching motors; see pages 3/19 and 3/24.

Contactor		ype Size	3RT201HB4. S00	3RT2 S00	01JB4.	3RT201KI S00	34.	3RT202KB4. S0
General data								
Mechanical endurance	Opera	ating cycles	30 million					10 million
Protective separation between the acc. to IEC 60947-1, Appendix N			400					
Control								
Solenoid coil operating range			0.7 1.25 x <i>U</i> _s					
Power consumption of the	At U _s 1	7 V W	1.6					2.3
solenoid coil (for cold coil)	2	4 V W	2.8					4.5
Closing = Closed	3	0 V W	4.4					7
Permissible residual current of the electronics (with 0 signal)			< 6 mA x (24 V/U _s)				< 10 mA x (24 V/U
Overvoltage configuration of the	solenoid coil		No overvoltage damping	With	diode	With suppres	sor	With varistor
			₽ O	+		- DK -		- 5 ∕2− <i>U</i>
Operating times								
Closing								
- At 17 V	ON-delay NO OFF-delay NC	ms ms	40 130 30 80					70 270 60 250
- At 24 V	ON-delay NO OFF-delay NC	ms ms	35 60 25 40					65 90 55 80
- At 30 V	ON-delay NO OFF-delay NC	ms ms	25 50 15 30					52 65 43 57
Closing at 17 30 V	OFF-delay NO ON-delay NC	ms ms	7 20 20 30	38 55		7 20 20 30		19 21 25 31
Contactor	Туре		3RT2011MB4	OKTO	3RT2011	VB4.	3RT2	2011SB4.
	Size		S00		S00		S00	
	Width	mm	45		45		45	
General data								
Mechanical endurance	Opera	ating cycles	30 million					
Protective separation between the acc. to IEC 60947-1, Appendix N	e coil and the main contacts	s V	400					
Control								
Solenoid coil operating range			0.85 1.85 x <i>U</i> _s					
Power consumption of the solenoid coil (for cold coil) Closing = Closed	At $U_{\rm S}$ 2	24 V W	1.6					
Permissible residual current, upright mounting position			On request					
Overvoltage configuration of the	solenoid coil		No overvoltage da	amping	With diode		With :	suppressor diode

SIRIUS 3RT20 coupling contactors (interface), 3-pole, up to 15 kW

Contactor		Туре	3RT2011MB40KT0	3RT2011VB4.	3RT2011SB4.
		Size	S00	S00	S00
Control					
Operating times					
 Closing 					
- At 20.5 V	ON-delay NO OFF-delay NC	ms ms	30 120 20 110		
- At 24 V	ON-delay NO OFF-delay NC	ms ms	25 90 15 80		
- At 44 V	ON-delay NO OFF-delay NC	ms ms	15 60 10 50		
Opening	OFF-delay NO ON-delay NC	ms ms	5 20 10 30	20 80 30 90	5 20 10 30

Selection and ordering data

DC operation Low power consumption Extended operating range of the solenoid coil PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B





3RT201.-1.B4.

Rated data AC-2 and AC-3 T _u : Up to 60 °C		Auxiliary co	ntacts		DT
Operational	Rating ¹⁾ of	Ident. No.	Version		
current I _e up to	three-phase motors at 50 Hz and		\I	L	
400 V	400 V)	(
Δ	kW		NO	NC	

Configurator

Article No.

Corew terminals

Price per PU

DT Spring

Config

Article No.

DT Spring-type terminals

Configurator

Article No.

Price per PU

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S00

Diode, varistor or RC element, attachable

(no auxiliary switch blocks can be mounted)

• 1 NO, Ident. No. 10

• 1 NC, Ident. No. 01

Rated control supply voltage $U_{\rm S}$ = 24 V DC, coil operating range **0.7 to 1.25** x $U_{\rm S}$ Power consumption of the solenoid coils **2.8 W** at 24 V

7	3	10 01	1	1	B B	3RT2015-1HB41 3RT2015-1HB42	B B	3RT2015-2HB41 3RT2015-2HB42
9	4	10 01	1	 1	B B	3RT2016-1HB41 3RT2016-1HB42	B B	3RT2016-2HB41 3RT2016-2HB42
12	5.5	10 01	1	 1	B ▶	3RT2017-1HB41 3RT2017-1HB42	B B	3RT2017-2HB41 3RT2017-2HB42

Rated control supply voltage $U_{\rm S}$ = 24 V DC, operating range **0.85 to 1.85 x** $U_{\rm S}$ Power consumption of the solenoid coils **1.6 W** at 24 V

7	3	10	1		B	3RT2015-1MB41-0KT0	R	3RT2015-2MB41-0KT0
1	3	01		1	В	3RT2015-1MB42-0KT0	В	3RT2015-2MB42-0KT0
9	4	10	1		В	3RT2016-1MB41-0KT0	В	3RT2016-2MB41-0KT0
		01		1	В	3RT2016-1MB42-0KT0	В	3RT2016-2MB42-0KT0
12	5.5	10 01	1		В	3RT2017-1MB41-0KT0 3RT2017-1MB42-0KT0	B B	3RT2017-2MB41-0KT0 3RT2017-2MB42-0KT0

Tor online configurator, see www.siemens.com/sirius/configurators.

For surge suppressors, see page 3/71.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.



SIRIUS 3RT20 coupling contactors (interface), 3-pole, up to 15 kW

DC operation Low power consumption Extended operating range of the solenoid coil Integrated coil circuit

PU (UNIT, SET, M) = 1 PS* = 1 unit = 41B





3RT201.-1.B4

3RT201.-2.B4.

400 V	at 50 Hz and 400 V kW		\) NC	
Operational current I_e up to	Rating ¹⁾ of three-phase motors	Ident. No.	Version	1	
Rated data AC-2 and AC-3 T _u : Up to 60 °C	1)	Auxiliary co			DT

⊕ DT **Screw terminals** Configurator £0,5 Price Article No. per PU

Γ	Spring-type terminals	<u> </u>
	Configurator	£
	Article No.	Price per PU

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S00

With integrated coil circuit (diode)

(no auxiliary switch blocks can be mounted)

• 1 NO, Ident. No. 10

• 1 NC, Ident. No. 01

Rated control supply voltage $U_{\rm S}$ = 24 V DC, coil operating range **0.7 to 1.25** x $U_{\rm S}$ Power consumption of the solenoid coils **2.8 W** at 24 V

. 0	moumphon or the colone							
7	3	10	1		В	3RT2015-1JB41	В	3RT2015-2JB41
		01		1	В	3RT2015-1JB42	В	3RT2015-2JB42
9	4	10	1			3RT2016-1JB41	В	3RT2016-2JB41
		01		1	Α	3RT2016-1JB42	В	3RT2016-2JB42
12	5.5	10	1		В	3RT2017-1JB41	В	3RT2017-2JB41
		01		- 1	B	2DT2017 1 ID42	R	2DT2047 2 ID42

Rated control supply voltage $U_{\rm S}$ = 24 V DC, operating range **0.85 to 1.85 x** $U_{\rm S}$ Power consumption of the solenoid coils **1.6 W** at 24 V

7	3	10 01	1	 1	B B	3RT2015-1VB41 3RT2015-1VB42	B B	3RT2015-2VB41 3RT2015-2VB42
9	4	10 01	1	 1	B B	3RT2016-1VB41 3RT2016-1VB42	B B	3RT2016-2VB41 3RT2016-2VB42
12	5.5	10 01	1	 1	B B	3RT2017-1VB41 3RT2017-1VB42	B B	3RT2017-2VB41 3RT2017-2VB42

For online configurator, see www.siemens.com/sirius/configurators.

 $^{^{\}rm 1)}$ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

SIRIUS 3RT20 coupling contactors (interface), 3-pole, up to 15 kW

DC operation Low power consumption Extended operating range of the solenoid coil Integrated coil circuit

PU (UNIT, SET, M) = 1 PS* = 1 unit = 41B





Spring-type terminals

Price

per PU

3RT201,-1,B4 Screw terminals

Configurator

Article No

3RT201.-2.B4 ⊕ DT

Configurator

Article No.

505

Price

per PU

Rated data AC-2 and AC-3 T _u : Up to 60 °C		Auxiliary co	ntacts		DT
Operational current I_e up to	Rating ¹⁾ of three-phase motors at 50 Hz and	Ident. No.	Version \I	Ļ	
400 V	400 V)	1	
А	kW		NO	NC	

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S00

With integrated coil circuit (suppressor diode)

(no auxiliary switch blocks can be mounted)

• 1 NO, Ident. No. 10

• 1 NC, Ident. No. 01

Rated control supply voltage $U_{\rm S}$ = 24 V DC, coil operating range **0.7 to 1.25** × $\pmb{U}_{\rm S}$ Power consumption of the solenoid coils **2.8 W** at 24 V

7	3	10 01	1	B 1 B	3RT2015-1KB41 3RT2015-1KB42	B ▶	3RT2015-2KB41 3RT2015-2KB42
9	4	10 01	1 	A 1 B	3RT2016-1KB41 3RT2016-1KB42	B B	3RT2016-2KB41 3RT2016-2KB42
12	5.5	10 01	1	B 1 B	3RT2017-1KB41 3RT2017-1KB42	A	3RT2017-2KB41 3RT2017-2KB42

Rated control supply voltage $U_{\rm S}$ = 24 V DC, operating range **0.85 to 1.85 x** $U_{\rm S}$ Power consumption of the solenoid coils **1.6 W** at 24 V

7	2	10	1		В	3RT2015-1SB41	В	3RT2015-2SB41
,	3	01	'		В	3RT2015-13B41	В	3RT2015-2SB41
		UT		ı	Ь	3R12015-15D42	D	3K12U13-23D42
9	4	10	1		В	3RT2016-1SB41	В	3RT2016-2SB41
		01		1	В	3RT2016-1SB42	В	3RT2016-2SB42
12	5.5	10	1		В	3RT2017-1SB41	В	3RT2017-2SB41
		01		1	B	3RT2017-1SB42	В	3RT2017-2SB42

 $[\]ensuremath{\mathfrak{D}}$ For online configurator, see www.siemens.com/sirius/configurators.

 $^{^{\}rm 1)}$ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.



SIRIUS 3RT20 coupling contactors (interface), 3-pole, up to 15 kW

DC operation Low power consumption Extended operating range of the solenoid coil Integrated coil circuit PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B





3RT202.-1KB40

3RT202.-2KB40

<u>A</u>	kW		NO	NC	
400 V	400 V)	1	
current I _e up to	three-phase motors at 50 Hz and		١	4	
Operational	Rating ¹⁾ of	Ident. No.	Version		
Rated data AC-2 and AC-3 T _u : Up to 60 °C		Auxiliary co	ntacts		DT

DT	Screw terminals	1	D٦
	Configurator	É	
	Article No.	Price per PU	

T	Spring-type terminals	<u> </u>
	Configurator	£
	Article No.	Price per PU

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Size S0

32

With integrated coil circuit (varistor)

(no auxiliary switch blocks can be mounted)

1 NO + 1 NC, Ident. No. 11

15

Rated control supply voltage $U_{\rm S}$ = 24 V DC, coil operating range **0.7 to 1.25 x** $U_{\rm S}$ Power consumption of the solenoid coils **4.5 W** at 24 V

11

 9
 4
 11
 1

 12
 5.5
 11
 1

 17
 7.5
 11
 1

 25
 11
 11
 1

3RT2023-1KB40	>	3RT2023-2KB40
3RT2024-1KB40	В	3RT2024-2KB40
3RT2025-1KB40	В	3RT2025-2KB40
3RT2026-1KB40	В	3RT2026-2KB40
3RT2027-1KB40	В	3RT2027-2KB40

 $[\]ensuremath{\mathfrak{D}}$ For online configurator, see www.siemens.com/sirius/configurators.

For accessories, see page 3/67.

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA23 reversing contactor assemblies

Overview

The 3RA23 contactor assemblies for reversing can be ordered as follows:

Sizes S00 to S2

- Fully wired and tested, with mechanical and electrical interlock
- · As individual parts for customer assembly

There is also a range of accessories (auxiliary switch blocks, surge suppressors, etc.) that must be ordered separately.

Overload relays for motor protection, see Chapter 7 "Protection Equipment" → "Overload Relays".

The 3RA23 contactor assemblies have screw or spring-type terminals (main and control circuits) and are suitable For screw fixing and snap-on mounting onto TH 35 standard mounting rails

Complete reversing contactor assemblies

The fully wired reversing contactor assemblies are suitable for use in any climate. They are finger-safe according to EN 50274.

The contactor assemblies size S00 to S2 each consist of two contactors with the same power, with one NC contact (S00) or one NO contact and one NC contact (S0, S2) in the basic unit.

The contactors are mechanically and electrically interlocked (NC contact interlock).

For motor protection, either 3RU2 or 3RB3 overload relays for direct mounting or stand-alone installation, or 3RN1 thermistor motor protection releases must be ordered separately.

Reversing contactor assemblies with voltage tap-off

The reversing contactor assemblies with voltage tap-off are required for mounting the function modules for connection to the controller via the IO-Link or AS-Interface communication systems. The 3RA27 function modules must be ordered separately.

For more information on IO-Link and AS-Interface, see Chapter 2 "Industrial Communication".

Components for customer assembly

Assembly kits for all sizes are available for customer assembly of reversing contactor assemblies.

Contactors, overload relays and – for momentary-contact operation of size S00 – auxiliary switches (NO contacts) for self-locking must be ordered separately. (With S0 and S2, the NO contacts integrated into the basic unit can be used.)

Rated data AC-2 for 50 Hz 400 V		Size	Article No.		
Rating kW	Operational current I	9	Contactor	Assembly kit	Fully wired and tested contactor assemblies
RVV	Λ		Screw terminals	Screw terminals	Screw terminals
3 4 5.5 7.5	7 9 12 16	S00	3RT2015-12 3RT2016-12 3RT2017-12 3RT2018-12	3RA2913-2AA1 ¹⁾	3RA2315-8XB30-1 3RA2316-8XB30-1 3RA2317-8XB30-1 3RA2318-8XB30-1
5.5 7.5 11	12 16 25	SO	3RT2024-10 3RT2025-10 3RT2026-10	3RA2923-2AA1 ¹⁾	3RA2324-8XB30-1 3RA2325-8XB30-1 3RA2326-8XB30-1
15 18.5	32 38		3RT2027-10 3RT2028-10		3RA2327-8XB30-1 3RA2328-8XB30-1
18.5 22	40 55	S2	3RT2035-10 3RT2036-10	3RA2933-2AA1 ²⁾	3RA2335-8XB30-1 3RA2336-8XB30-1
30 37	65 80		3RT2037-10 3RT2038-10		3RA2337-8XB30-1 3RA2338-8XB30-1
					Spring-type terminals
3 4 5.5 7.5	7 9 12 16	S00	3RT2015-22 3RT2016-22 3RT2017-22 3RT2018-22	3RA2913-2AA2 ¹⁾	3RA2315-8XB30-2 3RA2316-8XB30-2 3RA2317-8XB30-2 3RA2318-8XB30-2
5.5 7.5 11	12 16 25	SO	3RT2024-20 3RT2025-20 3RT2026-20	3RA2923-2AA2 ³⁾	3RA2324-8XB30-2 3RA2325-8XB30-2 3RA2326-8XB30-2
15 18.5	32 38		3RT2027-20 3RT2028-20		3RA2327-8XB30-2 3RA2328-8XB30-2

¹⁾ The assembly kit contains: Mechanical interlock; connecting clips for 2 contactors, wiring modules on the top and bottom (for main, auxiliary and control circuits).

²⁾ The assembly kit contains: Connecting pins for 2 contactors, wiring modules on the top and bottom (for main, control and auxiliary circuits).

³⁾ The assembly kit contains: Mechanical interlock; connecting clips for 2 contactors, wiring modules on the top and bottom (for main circuits).



3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA23 reversing contactor assemblies

Operating times

The operating times of the individual 3RT20 contactors are rated in such a way that no overlapping of the contact making and the arcing time between two contactors can occur on reversing, providing they are interlocked by way of their auxiliary switches (NC contact interlock) and the mechanical interlock.

For assemblies with AC operation and 50/60 Hz, a dead interval of 50 ms must be provided when used with voltages ≥ 500 V;

a dead interval of 30 ms is recommended for use with voltages \geq 400 V. These dead times do not apply to assemblies with DC operation.

The operating times of the individual contactors are not affected by the mechanical interlock.

Article No. scheme

Digit of the Article No.	1st - 3rd	4th	5th	6th	7th		8th	9th	10th	11th	12th		13th	14th	15th	16th
						_						_				
SIRIUS contactor assemblies	3 R A															
2nd generation		2														
Device type (e.g. 3 = reversing contactor assembly)			3													
Contactor size (1 = S00, 2 = S0, 3 = S2)																
Power dependent on size (e.g. 7 = 15 kW for S0)																
Type of overload relay (8X = without)																
Assembly (B = ready-assembled, E = ready-assembled with comm	unication)															
Interlock (3 = mechanical and electrical)																
Free auxiliary switches (e.g. S00: 0 = none; S0, S2: 0 = 2 NO total)																
Connection type (1 = screw, 2 = spring)																
Operating range / solenoid coil circuit (e.g. A = AC standard / with	out)															
Rated control supply voltage (e.g. L2 = 230 V, 50/60 Hz)																
Example	3 R A	2	3	2	7	-	8	X	В	3	0	-	1	Α	L	2

Note:

The article number scheme is presented here merely for information purposes and for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the catalog in the Selection and ordering data.

Benefits

Using wiring kits for reversing starters has the following advantages:

- Notable reduction of wiring in the control circuit
- Integrated mechanical interlocking
- Prevention of wiring errors in the main circuit

Connecting combs for screw terminals also result in:

- · Prevention of wiring errors in the control circuit
- · Reduction of testing costs
- Ready-jumpered actuation of the auxiliary switches and the frame (A2)
- · Integrated electrical interlocking

Accessories

Selecting the auxiliary switches

The following points should be noted:

Size S00

- For maintained-contact operation: Use contactors with an NC contact in the basic unit for the electrical interlock.
- For momentary-contact operation:
 Use contactors with an NC contact in the basic unit for the electrical interlock; in addition, an auxiliary switch block with at least one NO contact for latching is required per contactor.

Sizes S0 and S2

- For maintained-contact operation:
 The contactors have two integrated auxiliary contacts (1 NO + 1 NC); the NC contact can be used for electrical interlocking.
- For momentary-contact operation: Electrical interlock as for maintained-contact operation; the NO contact in the basic unit can be used for the latching.

Surge suppression

Sizes S00 to S2

All contactor assemblies can be fitted with RC elements or varistors for damping opening surges in the coil.

As with the individual contactors, the surge suppressors can either be plugged onto the top of the contactors (S00) or be plugged into the front of the contactors (S0 and S2).


3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA23 reversing contactor assemblies

Selection and ordering data

Fully wired and tested contactor assemblies \cdot Size S00 \cdot up to 7.5 kW

The figure shows the version with screw terminals

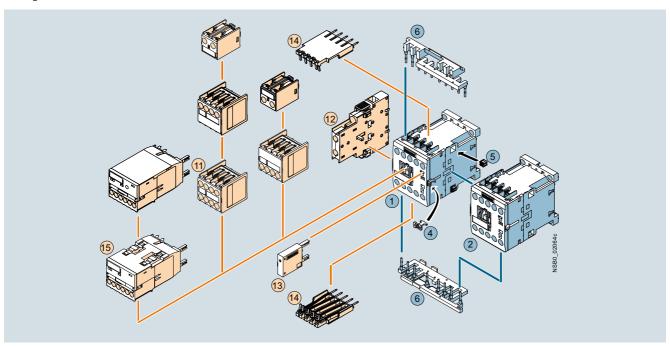

Мо	ountable accessories (optional)		
То	be ordered separately	Article No.	Page
1	Auxiliary switch block, front ¹⁾	3RH2911-1	3/64
12	Auxiliary switch block, lateral	3RH2921-1DA	3/66
13	Surge suppressors	3RT2916-1	3/71
14	Solder pin adapters	3RT1916-4KA1	3/75
15	Function module for connection to the control system	3RA2711BA00	3/169

Complete contactor assemblies									
Individu	al parts	Article No.	Article No.						
		Q11	Q12						
12	Contactor, 3 kW	3RT2015	3RT2015	3/35, 3/42					
12	Contactor, 4 kW	3RT2016	3RT2016	3/35, 3/42					
12	Contactor, 5.5 kW	3RT2017	3RT2017	3/35, 3/42					
12	Contactor, 7.5 kW	3RT2018	3RT208	3/35, 3/42					
456	Assembly kit comprising:	3RA2913-2	AA1	3/168					
	4 Mechanical interlo	ck ²⁾		3/168					
	5 2 connecting clips	for 2 contact	ors ²⁾	3/168					
	Wiring modules or connecting the ma interlock included (NC contact interlo	3/168							

¹⁾ Auxiliary switch block according to EN 50005 must be used.

²⁾ The parts 4 and 5 can only be ordered together as 3RA2912-2H mechanical connectors.

^{3) 3}RT201. contactors with one NC contact in the basic unit are required for the electrical interlock. An additional NO contact is required for momentary-contact operation.


3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA23 reversing contactor assemblies

Fully wired and tested contactor assemblies ^2) \cdot Size S00 \cdot up to 7.5 kW

 $\begin{array}{ll} PU \text{ (UNIT, SET, M)} = 1 \\ PS^* & = 1 \text{ unit} \\ PG & = 41B \end{array}$











3RA231.-8XB30-2A.0

Rated data AC-2	and AC-3			Rated control	DT	Screw terminals	(+)	DT	Spring-type terminals	<u> </u>
Operational		of three-phase	e motors	supply voltage U_s^{1}		A 11 1 A1			A.C. L. M.	
current I _e up to	at 50 Hz			O _S		Article No.	Price per PU		Article No.	Price per PU
400 V	230 V	400 V	690 V				perio			perio
Α	kW	kW	kW	V						
AC operation,	50/60 Hz									
7	2.2	3	4	24 AC	В	3RA2315-8XB30-1AB0		В	3RA2315-8XB30-2AB0	
				110 AC	В	3RA2315-8XB30-1AF0		В	3RA2315-8XB30-2AF0	
				230 AC	Α	3RA2315-8XB30-1AP0		Α	3RA2315-8XB30-2AP0	
9	3	4	5.5	24 AC	В	3RA2316-8XB30-1AB0		В	3RA2316-8XB30-2AB0	
				110 AC 230 AC	В	3RA2316-8XB30-1AF0 3RA2316-8XB30-1AP0		В	3RA2316-8XB30-2AF0 3RA2316-8XB30-2AP0	
					A	***************************************		<u>A</u>		
12	3	5.5	5.5	24 AC 110 AC	B B	3RA2317-8XB30-1AB0 3RA2317-8XB30-1AF0		B B	3RA2317-8XB30-2AB0 3RA2317-8XB30-2AF0	
				230 AC	A	3RA2317-8XB30-1AP0		А	3RA2317-8XB30-2AP0	
16	4	7.5	7.5	24 AC	В	3RA2318-8XB30-1AB0		В	3RA2318-8XB30-2AB0	
10	-	7.0	7.0	110 AC	В	3RA2318-8XB30-1AF0		В	3RA2318-8XB30-2AF0	
				230 AC	Ā	3RA2318-8XB30-1AP0		Ā	3RA2318-8XB30-2AP0	
DC operation										
7	2.2	3	4	24 DC	Α	3RA2315-8XB30-1BB4		Α	3RA2315-8XB30-2BB4	
9	3	4	5.5	24 DC	Α	3RA2316-8XB30-1BB4		Α	3RA2316-8XB30-2BB4	
12	3	5.5	5.5	24 DC	Α	3RA2317-8XB30-1BB4		Α	3RA2317-8XB30-2BB4	
16	4	7.5	7.5	24 DC	Α	3RA2318-8XB30-1BB4		Α	3RA2318-8XB30-2BB4	
With voltage t	ap-off									
7	2.2	3	4	24 DC	Α	3RA2315-8XE30-1BB4		В	3RA2315-8XE30-2BB4	
9	3	4	5.5	24 DC	Α	3RA2316-8XE30-1BB4		В	3RA2316-8XE30-2BB4	
12	3	5.5	5.5	24 DC	Α	3RA2317-8XE30-1BB4		Α	3RA2317-8XE30-2BB4	
16	4	7.5	7.5	24 DC	Α	3RA2318-8XE30-1BB4		Α	3RA2318-8XE30-2BB4	

¹⁾ Coil operating range at 50 Hz: 0.8 ... 1.1 x U_s; at 60 Hz: 0.85 ... 1.1 x U_s.


²⁾ The contactors integrated in the contactor assemblies have no unassigned auxiliary contacts. When used with a voltage tap-off and function module, the auxiliary contacts are unassigned.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA23 reversing contactor assemblies

Fully wired and tested contactor assemblies \cdot Size S0 \cdot up to 18.5 kW

The figure shows the version with screw terminals

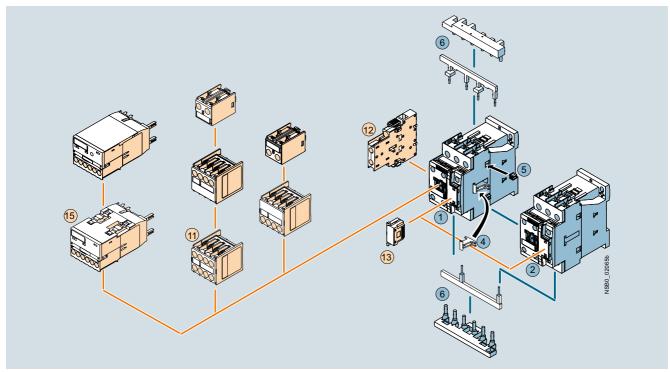

Mc	ountable accessories (optional)		
То	be ordered separately	Article No.	Page
1	Auxiliary switch block, front	3RH2921-1	3/64
12	Auxiliary switch block, lateral	3RH2921-1DA	3/66
13	Surge suppressor	3RT2936-1	3/71
15	Function module for connection to the control system	3RA2711BA00	3/169

1)	The parts 🕖	and 🙉	can only be ordered together as 3RA2922-2H
,	mechanical co	onnector	S.

Comple	Complete contactor assemblies									
Individu	al p	arts	Article No.		Page					
			Q11	Q12						
12	Co	ntactor, 5.5 kW	3RT2024	3RT2024	3/37, 3/44					
12	Co	ntactor, 7.5 kW	3RT2025	3RT2025	3/37, 3/44					
12	Co	ntactor, 11 kW	3RT2026	3RT2026	3/37, 3/44					
12	Co	ntactor, 15 kW	3RT2027	3RT2027	3/37, 3/44					
12	Co	ntactor, 18.5 kW	3RT2028	3RT2028	3/37, 3/44					
456		sembly kit nprising:	3RA2923-2A	3/168						
	4	Mechanical interloc	ck ¹⁾		3/168					
	(5)	2 connecting clips	3/168							
	6	connecting the ma	Wiring modules on the top and bottom for connecting the main current paths, electrical interlock included (NC contact interlock)							

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA23 reversing contactor assemblies

Fully wired and tested contactor assemblies · Size S0 · up to 18.5 kW

PU (UNIT, SET, M) = 1 PS* = 1 PG = 4 = 1 unit = 41B



3RA2324-8XE30-1BB4







3RA232.-8XB30-2A.2

Rated data AC-2	and AC-3			Rated control	DT	Screw terminals	(1)	DT	Spring-type terminals	00
Operational		of three-phase	e motors	supply voltage $U_s^{1)}$		A 11 1 A1	$\overline{}$		A.C. I. M.	
current I _e up to	at 50 Hz		2021/	08		Article No.	Price per PU		Article No.	Price per PU
400 V	230 V	400 V	690 V				por r o			porro
<u>A</u>	kW	kW	kW	V						
AC operation,	50/60 Hz									
12	3	5.5	7.5	24 AC	В	3RA2324-8XB30-1AC2		В	3RA2324-8XB30-2AC2	
				110 AC 230 AC	B B	3RA2324-8XB30-1AG2 3RA2324-8XB30-1AL2		B B	3RA2324-8XB30-2AG2 3RA2324-8XB30-2AL2	
17	4	7.5	11	24 AC	В	3RA2325-8XB30-1AC2		В	3RA2325-8XB30-2AC2	
17	4	7.5	11	110 AC	В	3RA2325-8XB30-1AG2		В	3RA2325-8XB30-2AG2	
				230 AC	В	3RA2325-8XB30-1AL2		В	3RA2325-8XB30-2AL2	
25	5.5	11	11	24 AC	В	3RA2326-8XB30-1AC2		В	3RA2326-8XB30-2AC2	
				110 AC 230 AC	B B	3RA2326-8XB30-1AG2 3RA2326-8XB30-1AL2		B B	3RA2326-8XB30-2AG2 3RA2326-8XB30-2AL2	
00	7.5	45	10.5							
32	7.5	15	18.5	24 AC 110 AC	B B	3RA2327-8XB30-1AC2 3RA2327-8XB30-1AG2		B B	3RA2327-8XB30-2AC2 3RA2327-8XB30-2AG2	
				230 AC	В	3RA2327-8XB30-1AL2		В	3RA2327-8XB30-2AL2	
38	11	18.5	18.5	24 AC	В	3RA2328-8XB30-1AC2		В	3RA2328-8XB30-2AC2	
				110 AC	В	3RA2328-8XB30-1AG2		В	3RA2328-8XB30-2AG2	
DO				230 AC	В	3RA2328-8XB30-1AL2		В	3RA2328-8XB30-2AL2	
DC operation										
12	3	5.5	7.5	24 DC	Α	3RA2324-8XB30-1BB4		Α	3RA2324-8XB30-2BB4	
17	4	7.5	11	24 DC	Α	3RA2325-8XB30-1BB4		Α	3RA2325-8XB30-2BB4	
25	5.5	11	11	24 DC	Α	3RA2326-8XB30-1BB4		Α	3RA2326-8XB30-2BB4	
32	7.5	15	18.5	24 DC	Α	3RA2327-8XB30-1BB4		Α	3RA2327-8XB30-2BB4	
38	11	18.5	18.5	24 DC	Α	3RA2328-8XB30-1BB4		Α	3RA2328-8XB30-2BB4	
With voltage to	ap-off									
12	3	5.5	7.5	24 DC	Α	3RA2324-8XE30-1BB4		Α	3RA2324-8XE30-2BB4	
17	4	7.5	11	24 DC	Α	3RA2325-8XE30-1BB4		В	3RA2325-8XE30-2BB4	
25	5.5	11	11	24 DC	Α	3RA2326-8XE30-1BB4		Α	3RA2326-8XE30-2BB4	
32	7.5	15	18.5	24 DC	В	3RA2327-8XE30-1BB4		Α	3RA2327-8XE30-2BB4	
38	11	18.5	18.5	24 DC	Α	3RA2328-8XE30-1BB4		Α	3RA2328-8XE30-2BB4	


¹⁾ Coil operating range at 50 Hz: $0.8 ... 1.1 \times U_{\rm S}$; at 60 Hz: $0.85 ... 1.1 \times U_{\rm S}$.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA23 reversing contactor assemblies

Fully wired and tested contactor assemblies \cdot Size S2 \cdot up to 37 kW

The figure shows the version with screw terminals

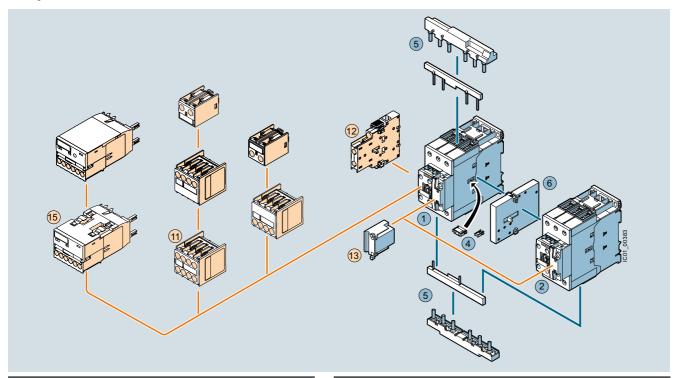

Мо	Mountable accessories (optional)									
То	be ordered separately	Article No.	Page							
1	Auxiliary switch block, front	3RH2921-1	3/64							
12	Auxiliary switch block, lateral	3RH2921-1DA	3/66							
13	Surge suppressor	3RT2936-1	3/71							
15	Function module for connection to the control system	3RA2711BA00	3/169							

Comple	Complete contactor assemblies									
Individ	ual parts	Article No.		Page						
		Q11	Q12							
12	Contactor, 18.5 kW	3RT2035	3RT2035	3/40, 3/48						
12	Contactor, 22 kW	3RT2036	3RT2036	3/40, 3/48						
12	Contactor, 30 kW	3RT2037	3RT2037	3/40, 3/48						
12	Contactor, 37 kW	3RT2038	3RT2038	3/40, 3/48						
45	Assembly kit comprising:	3RA2933-2/	3/168							
	4 2 connecting pins	for 2 contacto	ors	3/168						
	3/168									
6	Mechanical interlock	3RA2934-2I	3	3/168						

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA23 reversing contactor assemblies

Fully wired and tested contactor assemblies · Size S2 · up to 37 kW

 $\begin{array}{ll} PU \text{ (UNIT, SET, M)} = 1 \\ PS^* & = 1 \text{ unit} \\ PG & = 41B \end{array}$







3RA233.-8XB30-1A.2

Rated data AC-2 a		of three-phase	motoro	Rated control supply voltage	DT	Screw terminals	⊕ D1	Spring-type terminals	
current I_e up to	at 50 Hz		11101015	$U_{\rm s}^{(1)}$		Article No.	Price	Article No.	Price
400 V	230 V	400 V	690 V				per PU		per PU
Α	kW	kW	kW	V					
AC operation,	50/60 Hz								
40	11	18.5	22	110 AC 230 AC	A A	3RA2335-8XB30-1AG2 3RA2335-8XB30-1AL2		-	
50	15	22	22	110 AC 230 AC	B A	3RA2336-8XB30-1AG2 3RA2336-8XB30-1AL2			
65	18.5	30	45	110 AC 230 AC	B A	3RA2337-8XB30-1AG2 3RA2337-8XB30-1AL2		-	
80	22	37	55	110 AC 230 AC	B A	3RA2338-8XB30-1AG2 3RA2338-8XB30-1AL2		Ξ	
AC/DC operation	on ²⁾								
40	11	18.5	22	20 33 AC/DC	Α	3RA2335-8XB30-1NB3			
50	15	22	22	20 33 AC/DC	Α	3RA2336-8XB30-1NB3			
65	18.5	30	45	20 33 AC/DC	Α	3RA2337-8XB30-1NB3			
80	22	37	55	20 33 AC/DC	Α	3RA2338-8XB30-1NB3			
With voltage ta	p-off								
40	11	18.5	22	20 33 AC/DC	В	3RA2335-8XE30-1NB3		-	
50	15	22	22	20 33 AC/DC	В	3RA2336-8XE30-1NB3			
65	18.5	30	45	20 33 AC/DC	В	3RA2337-8XE30-1NB3			
80	22	37	55	20 33 AC/DC	В	3RA2338-8XE30-1NB3			

 $^{^{1)}}$ AC coil operating range at 50 Hz: 0.8 ... 1.1 × $U_{\rm S}$ at 60 Hz: 0.85 ... 1.1 × $\dot{U}_{\rm S}$

AC/DC coil operating range 0.8 ... $1.1 \times U_s$.

²⁾ With integrated coil switch (varistor)

For

Contactor Assemblies

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA23 reversing contactor assemblies

Components for customer assembly

PU (UNIT, SET, M) = 1

PS* PG = 1 unit (unless otherwise specified)

= 41B





DT Spring-type

contactor	S						terminals	
Туре				Article No.	Price per PU		Article No.	Price per PU
Assemb	oly kits for	making 3-pole contactor assemblies						
3RT201	S00-S00	The assembly kit contains: Mechanical interlock, 2 connecting clips for 2 contactors, wiring modules on the top and bottom						
		 For main, auxiliary and control circuits 	>	3RA2913-2AA1			3RA2913-2AA2	
3RT202	S0-S0	The assembly kit contains: Mechanical interlock, 2 connecting clips for 2 contactors, wiring modules on the top and bottom						
		 For main, auxiliary and control circuits¹⁾ 	>	3RA2923-2AA1				
		 Only for main circuit²⁾ 				>	3RA2923-2AA2	
3RT203	S2-S2	The assembly kit contains:						
	NEW	2 connecting pins for 2 contactors; wiring modules on the top and bottom						
		 For main and auxiliary circuits 	>	3RA2933-2AA1				
		 Only for main circuit³⁾ 			E	В	3RA2933-2AA2	

Individual components for making 3 and 4-pole contactor assemblies

nodules						
S00-S00	Top (in-phase)	PS = 5 units	В	3RA2913-3DA1	В	3RA2913-3DA2
	Bottom (with phase reversal)	PS = 5 units	В	3RA2913-3EA1	В	3RA2913-3EA2
S0-S0	Top (in-phase)	PS = 5 units	В	3RA2923-3DA1	В	3RA2923-3DA2
	Bottom (with phase reversal)	PS = 5 units	В	3RA2923-3EA1	В	3RA2923-3EA2
S2-S2	Top (in-phase)	PS = 5 units		3RA1933-3D		3RA1933-3D
NEW	Bottom (with phase reversal)	PS = 5 units	▶	3RA1933-3E	▶	3RA1933-3E
ical conne	ectors					
S00-S00	For lateral interlock, without contactor clearance	PS = 10 units	В	3RA2912-2H	В	3RA2912-2H
	The connectors consist of a mechanical interlock and two connecting clips					
S0-S0	For lateral interlock, without contactor clearance	PS = 10 units	В	3RA2922-2H	В	3RA2922-2H
	The connectors consist of a mechanical interlock and two connecting clips					
S2-S2	For lateral interlock, without contactor clearance	PS = 20 units	•	3RA2932-2C	•	3RA2932-2C
	For lateral interlock, with 10 mm contactor clearance	PS = 20 units	•	3RA2932-2D	Þ	3RA2932-2D
S2-S2	For lateral interlock,	PS = 20 units	A	3RA2932-2G	Α	3RA2932-2G
NEW	with 10 mm contactor clearance					
	\$00-\$00 \$0-\$0 \$2-\$2 N=W cal conne \$00-\$00 \$0-\$0	S00-S00 Top (in-phase) Bottom (with phase reversal) S0-S0 Top (in-phase) Bottom (with phase reversal) S2-S2 Top (in-phase) Bottom (with phase reversal) Salest Romectors S00-S00 For lateral interlock, without contactor clearance The connectors consist of a mechanical interlock and two connecting clips S0-S0 For lateral interlock, without contactor clearance The connectors consist of a mechanical interlock and two connecting clips S0-S0 For lateral interlock, without contactor clearance The connectors consist of a mechanical interlock and two connecting clips S2-S2 For lateral interlock, without contactor clearance For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance	S00-S00 Top (in-phase) Bottom (with phase reversal) S0-S0 Top (in-phase) Bottom (with phase reversal) S2-S2 Top (in-phase) Bottom (with phase reversal) Bottom (with phase reversal) Bottom (with phase reversal) PS = 5 units S2-S2 Top (in-phase) Bottom (with phase reversal) PS = 5 units PS = 5 units PS = 5 units PS = 5 units For lateral interlock, without contactor clearance The connectors consist of a mechanical interlock and two connecting clips S0-S0 For lateral interlock, without contactor clearance The connectors consist of a mechanical interlock and two connecting clips S2-S2 For lateral interlock, without contactor clearance For lateral interlock, with 10 mm contactor clearance For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance PS = 20 units	S00-S00 Top (in-phase) Bottom (with phase reversal) S0-S0 Top (in-phase) Bottom (with phase reversal) S2-S2 For lateral interlock, without contactor clearance The connectors consist of a mechanical interlock, and two connecting clips S0-S0 For lateral interlock, without contactor clearance The connectors consist of a mechanical interlock and two connecting clips S2-S2 For lateral interlock, without contactor clearance For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance	S00-S00 Top (in-phase) Bottom (with phase reversal) S0-S0 Top (in-phase) Bottom (with phase reversal) S0-S0 Top (in-phase) Bottom (with phase reversal) S2-S2 For lateral interlock, without contactor clearance The connectors consist of a mechanical interlock and two connecting clips S0-S0 For lateral interlock, without contactor clearance The connectors consist of a mechanical interlock and two connecting clips S2-S2 For lateral interlock, with 10 mm contactor clearance For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance S2-S2 For lateral interlock, with 10 mm contactor clearance	S00-S00 Top (in-phase) PS = 5 units B 3RA2913-3DA1 B Bottom (with phase reversal) PS = 5 units B 3RA2913-3EA1 B Bottom (with phase reversal) PS = 5 units B 3RA2923-3DA1 B Bottom (with phase reversal) PS = 5 units B 3RA2923-3EA1 B Bottom (with phase reversal) PS = 5 units B 3RA2923-3EA1 B B S2-S2 Top (in-phase) PS = 5 units PS = 5 u

Machanical interlocks

nccman.	cui iiiciii	ocno				
3RT203	S2-S2	For size S2, the mechanical locking	▶	3RA2934-2B	>	3RA2934-2B
	NEW	device must be ordered separately				

Use of the 3RA2923-2AA1 assembly kit in conjunction with the 3RT202.-....-3MA0 contactors is limited because the auxiliary switches in the basic unit are not allowed to be used on account of the permanently mounted auxiliary switch block.

²⁾ Version in size S0 with spring-type terminals:
Only the wiring modules for the main circuit are included. No connectors are included for the auxiliary and control circuit.

³⁾ Version in size S2 with spring-type terminals in the auxiliary and control circuits: Only the wiring modules for the main circuit are included. A cable set is included for the auxiliary circuit.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA23 reversing contactor assemblies

Components for customer assembly

PU (UNIT, SET, M) = 1 PS* = 1 PG = 4 = 1 unit (unless otherwise specified)

= 41B





-	
- marginal action	C. C.
3RA2711-1BA0	0

3RA2711-2BA00

For contactors	Size	Version	DT	Screw terminals	⊕ DT	Spring-type terminals	<u> </u>
Туре				Article No.	Price per PU	Article No.	Price per PU
Functio	n module	es for connection to the control system					
3RT201, 3RT202, 3RT203	S00, S0, S2	IO-Link connection, comprising one basic and one coupling module and an additional module connector for assembling an IO-Link group	А	3RA2711-1BA00	А	3RA2711-2BA00	
3RT201, 3RT202, 3RT203	S00, S0, S2	AS-Interface connection, comprising one basic and one coupling module	А	3RA2712-1BA00	A	3RA2712-2BA00	
Accesso	ories for 3	3RA27 function modules					
3RT201, 3RT202, 3RT203	S00, S0, S2	 Module connector set, comprising: 2 module connectors, 14-pole, short 2 interface covers 	NEW A	3RA2711-0EE10	A	3RA2711-0EE10	
		Module connectors					
3RT201, 3RT202, 3RT203	S00, S0, S2	• 14-pole, 9 cm For size jump + 1 space	<i>NEW</i> A	3RA2711-0EE06	A	3RA2711-0EE06	
3RT201, 3RT202, 3RT203	S00, S0, S2	14-pole, 26 cm For various space combinations	NEW A	3RA2711-0EE07	А	3RA2711-0EE07	
3RT201, 3RT202, 3RT203	S00, S0, S2	14-pole, 33.5 cm For various space combinations	NEW A	3RA2711-0EE08	A	3RA2711-0EE08	
3RT201, 3RT202, 3RT203	S00, S0, S2	10-pole, 9 cm For separate control signal infeed within an IO-Link group	NEW A	3RA2711-0EE16	А	3RA2711-0EE16	
3RT201, 3RT202, 3RT203	S00, S0, S2	Sealable covers	PS = 5 units A	3RA2910-0	А	3RA2910-0	

Operator panels for IO-Link, see page 3/202.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA13 reversing contactor assemblies

Overview

The 3RA13 reversing contactor assemblies can be ordered as follows:

Size S3

- Fully wired and tested, with mechanical and electrical interlock
- · As individual parts for customer assembly

Sizes S6 to S12

· As individual parts for customer assembly

There is also a range of accessories (auxiliary switch blocks, surge suppressors, etc.) that must be ordered separately.

Overload relays for motor protection, see Chapter 7 "Protection Equipment" → "Overload Relays".

The 3RA13 contactor assemblies have screw terminals. Size S3 is suitable For screw fixing and snap-on mounting onto TH 35 standard mounting rails.

Complete units

The fully wired reversing contactor assemblies are suitable for use in any climate. They are finger-safe according to EN 50274.

The contactor assemblies consist of two contactors with the same power, with one NC contact in the basic unit. The contactors are mechanically and electrically interlocked (NC contact interlock).

For motor protection, either 3RU11 or 3RB2 overload relays for direct mounting or stand-alone installation or 3RN1 thermistor motor protection releases must be ordered separately.

Components for customer assembly

Assembly kits for all sizes are available for customer assembly of reversing contactor assemblies.

Contactors, overload relays and the mechanical interlock and – for momentary-contact operation – auxiliary switches (NO contacts) for latching must be ordered separately.

Rated data AC- 50 Hz 400 V AC		Size	Article No.					
Rating	Operational current I_e		Contactor	Mechanical interlock ¹⁾	Mechanical interlock ²⁾	Mechanical interlock ³⁾	Assembly kit	Fully wired and tested contactor assemblies
kW	А							
30	65	S3	3RT1044	3RA1924-1A	3RA1924-2B		3RA1943-2A ⁴⁾	3RA1344-8XB30-1
37	80		3RT1045					3RA1345-8XB30-1
45	95		3RT1046					3RA1346-8XB30-1
55	115	S6	3RT1054			3RA1954-2A	3RA1953-2M ⁵⁾	
75	150		3RT1055					
90	185		3RT1056					
110	225	S10	3RT1064			3RA1954-2A	3RA1963-2A ⁵⁾	
132	265		3RT1065					
160	300		3RT1066					
200	400	S12	3RT1075			3RA1954-2A	3RA1973-2A ⁵⁾	
250	500		3RT1076					

¹⁾ Can be mounted onto the front.

Operating times

The operating times of the individual 3RT10 contactors are rated in such a way that no overlapping of the contact making and the arcing time between two contactors can occur on reversing, provided they are interlocked by way of their auxiliary switches (NC contact interlock) and the mechanical interlock.

For assemblies with AC operation and 50/60 Hz, a dead interval of 50 ms must be provided when used with voltages \geq 500 V; a dead interval of 30 ms is recommended for use with voltages \geq 400 V. These dead times do not apply to assemblies with DC operation.

The operating times of the individual contactors are not affected by the mechanical interlock.

²⁾ Laterally mountable with one auxiliary contact.

³⁾ Laterally mountable without auxiliary contact.

⁴⁾ The assembly kit contains: two connecting clips for contactors as well as wiring modules on the top and bottom.


⁵⁾ The assembly kit contains wiring modules on the top and bottom.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA13 reversing contactor assemblies

Selection and ordering data

Fully wired and tested contactor assemblies \cdot Size S3 \cdot up to 45 kW

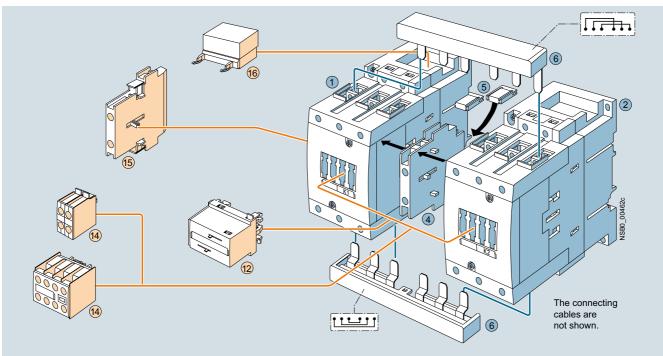

Mou	ntable accessories (optional)	
To be	ordered separately	Article No.	Page
(12) (14) (15) (16)	Mech. interlock, front Auxiliary switch block, front Auxiliary switch block, lateral Surge suppressor	3RA1924-1A 3RH1921-1CA 3RH1921-1EA 3RT1926-1 3RT1936-1	3/172 3/114 3/116 3/119

Compl	ete contactor assemblies			
Individ	ual parts	Article No.		Page
	•	Q1	Q2	_
12	Contactor, 30 kW	3RT1044	3RT1044	3/97
12	Contactor, 37 kW	3RT1045	3RT1045	3/97
12	Contactor, 45 kW	3RT1046	3RT1046	3/97
4	Mech. interlock, lateral	3RA1924-2B		3/172
56	Assembly kit	3RA1943-2A		3/173
	The assembly kit contains	3:		

main current paths

2 connecting clips for two contactors with 10 mm distanceWiring modules on the top and bottom for connecting the

	Rated data Operational current I _e up to	Ratings	of nase moto	ors		Rated control supply voltage $U_s^{(1)}$	DT	Screw terminals Article No.	Price	PU (UNIT, SET, M)	PS*	PG
	500 V	230 V	400 V	500 V	690 V				per PU			
	Α	kW	kW	kW	kW	V						
Grand Control	AC opera	tion at !	50/60 Hz	Z								
200 000	65	18.5	30	37	45	24 AC 110 AC 230 AC	B B B	3RA1344-8XB30-1AC2 3RA1344-8XB30-1AG2 3RA1344-8XB30-1AL2		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
	80	22	37	45	55	24 AC 110 AC 230 AC	B B B	3RA1345-8XB30-1AC2 3RA1345-8XB30-1AG2 3RA1345-8XB30-1AL2		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
4	95	22	45	55	55	24 AC 110 AC 230 AC	B B B	3RA1346-8XB30-1AC2 3RA1346-8XB30-1AG2 3RA1346-8XB30-1AL2		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
3RA1348XB30-1	DC opera	tion										
	65 80 95	18.5 22 22	30 37 45	37 45 55	45 55 55	24 DC 24 DC 24 DC	B B B	3RA1344-8XB30-1BB4 3RA1345-8XB30-1BB4 3RA1346-8XB30-1BB4		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B

 $^{^{1)}}$ Coil operating range at 50 Hz: 0.8 ... 1.1 x $U_{\rm S}$; at 60 Hz: 0.85 ... 1.1 x $U_{\rm S}$

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA13 reversing contactor assemblies

Components for customer assembly

Components for cus	tomer ass	embly						
	For contactors	Size	Version	DT	Article No. Price per PU		PS*	PG
	Туре							
Mechanical interlocks			1)					
	3RT104 3RT134 3RT144	S3	Laterally mountable ¹⁾ Each with one auxiliary contact (1 NC contact) per contactor (can only be used to connect contactors which are not more than 1 size larger or smaller. The mounting depth of the smaller contactor has to be adapted.)	•	3RA1924-2B	1	1 unit	41B
3RA1924-1A mounted onto 2 contactors	3RT104	S3	Can be mounted onto the front ²⁾ Onto contactor sizes S2 and S3 (for contactors of the same size) Note: Use 3RA1932-2C mechanical connectors.	•	3RA1924-1A	1	1 unit	41B
3RA1954-2A	3RT1.5 3RT1.6 3RT1.7	S6 S10 S12	Laterally mountable, without auxiliary contacts Contactor sizes S6, S10 and S12 can be interlocked with each other as required; no adaptation of mounting depth is necessary. Contactor clearance 10 mm.	•	3RA1954-2A	1	1 unit	41B
3RA1954-2C	3RT104A with 3RT105	S3 with S6	Adapter, laterally mountable, for mechanical interlocking of contactor S3 (only for AC operation) with contactor S6 using 3RA1954-2A locking device (must be ordered separately) incl. connecting clips	Α	3RA1954-2C	1	1 unit	41B
Coil repeat terminals								
3RA1923-3B	3RT104	S3	For the coil terminals A1 and A2 for reversing starters with contactors of size S3. 2 x A1 and 1 x A2 are required per assembly. (One set contains 10 x A1 and 5 x A2)	В	3RA1923-3B	1	1 unit	41B
Base plates								
	3RT105 3RT1.6	S6 S10	For customer assembly of reversing contactor assemblies	B B	3RA1952-2A 3RA1962-2A	1 1	1 unit 1 unit	41B 41B
	3RT1.7	S12		В	3RA1972-2A	1	1 unit	41B
Assembly kits for ma	king 3-pole	e contacto	r assemblies					
	3RT104	S3	The assembly kit contains: 2 connecting clips for two contactors, wiring modules on the top and bottom	•	3RA1943-2A	1	1 unit	41B
3RA1943-2A								
43						-		

 $^{^{\}rm 1)}$ Can also be used for 4-pole contactors with sizes S2 and S3.

²⁾ Can also be used for size S0 4-pole contactors.



Contactor Assemblies 3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA13 reversing contactor assemblies

	For	Size	Version	1		DT	Article No.	Price		PS*	PG
	contactors	6						per PU	(UNIT, SET, M)		
	Type								0=1, 11.		
Assembly kits for ma	king 3-po	le conta	ctor assen	nblies							_
	3RT105	S6		sembly kit conta		Α	3RA1953-2A		1	1 unit	41B
				modules on the nection with bo							
			(101 001	inection with bo.	x terriiriar)						
4											
VSB0_0172.											
NSBO											
3RA1953-2A											
e e e e e e e e e e e e e e e e e e e	3RT105	S6	The as	sembly kit conta modules on the	ins:	Α	3RA1953-2M		1	1 unit	41B
	3RT1.6	S10		nection without		Α	3RA1963-2A		1	1 unit	41B
	3RT1.7	S12				Α	3RA1973-2A		1	1 unit	41B
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0											
3RA1953-2M											
	_	0:	0			DT	A 12 1 N	D :	DU	DO*	DO
	For contactors	Size	Contactor clearance	version		וט	Article No.	Price per PU		PS*	PG
									SÈT, M)		
	Туре		mm								
Wiring modules, sing											
	3RT104	S3-S3	10	Top (in-phase)	1)		3RA1943-3D		1	1 unit	41B
	2DT105	S6-S6	10	Bottom (with ph		^	3RA1943-3E		1	1 unit	41B 41B
4	3RT105	36-36	10	box terminal)	for connection with	А	3RA1953-3D		'	1 unit	418
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0											
3RA1953-3D											
				Top (with phase	e reversal, for	Α	3RA1953-3P		1	1 unit	41B
				connection with	nout box terminal)						
NSBO_01835											
S S S S S S S S S S S S S S S S S S S											
3RA1953-3P											
311A 1930-31									l		
	For	Size		Interlocking	Version	DT	Article No.	Price		PS*	PG
	contactors		clearance					per PU	(UNIT, SET, M)		
	Type		mm						, ,		
Mechanical connecto											
ATTE	3RT1.4	S3-S3	0	On front	For 3-pole	▶	3RA1932-2C		1	10 units	41B
					contactors						
e					(1 unit corre- sponds to 2 parts						
3RA1932-2C					for 1 assembly)						
A STATE OF THE STA	3RT1.4	S3-S3	10	Lateral	For 3-pole		3RA1932-2D		1	10 units	41B
8	3RT1.5	S6-S6			contactors						
3RA1932-2D					(1 unit corre- sponds to 2 parts						
					for 1 assembly)						
	3RT1.4	S3-S3	10	Lateral	For 4-pole contactors	В	3RA1942-2G		1	10 units	41B
The state of the s					(1 unit corre-						
200					sponds to 2 parts						
3RA1942-2G					for 1 assembly)						

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Overview

These 3RA24 contactor assemblies for wye-delta starting are designed for standard applications.

Note:

Contactor assemblies for wye-delta starting in special applications such as very heavy starting 1) or wye-delta starting of special motors must be customized. Help with designing such special applications is available from Technical Assistance.

The 3RA24 contactor assemblies for wye-delta starting can be ordered as follows:

Sizes S00 to S2

- · Fully wired and tested, with electrical and mechanical interlock
- · As individual parts for customer assembly

A dead interval of 50 ms on reversing is already integrated in the function module for wye-delta starting.

The 3RA24 contactor assemblies have screw or spring-type terminals and are suitable for screwing or snapping onto TH 35 standard mounting rails. A base plate is also available for the size S2 assembly.

With the fully wired and tested 3RA24 contactor assemblies, the auxiliary contacts included in the basic devices are unassigned.

There is also a range of accessories (lateral auxiliary switch blocks, etc.) that must be ordered separately.

- 1) For effective support from Technical Assistance you must provide the following details:
 - Rated motor voltage

 - Rated motor current
 - Service factor, operating values
 - Motor starting current factor
 - Starting time
 - Ambient temperature

Rated data			Size	Article No.		
at 50 Hz 400 V	AC		0120	7111010 140.		
Rating	Operational current I_e	Motor current		Line/delta contactor	Star contactor	Complete assemblies
kW	А	А				
				Screw terminals	Screw terminals	Screw terminals
5.5	12	9.5 13.8	S00-S00-S00	3RT2015-1	3RT2015-1	3RA2415-8XF31-1
7.5	16	12.1 17		3RT2017-1	3RT2015-1	3RA2416-8XF31-1
11	25	19 25		3RT2018-1	3RT2016-1	3RA2417-8XF31-1
11	25	19 25	S0-S0-S0	3RT2024-10	3RT2024-10	3RA2423-8XF32-1
15	32	24.1 34		3RT2026-10	3RT2024-10	3RA2425-8XF32-1
18.5	40	34.5 40		3RT2026-10	3RT2024-10	3RA2425-8XF32-1
22	50	31 43		3RT2027-10	3RT2026-10	3RA2426-8XF32-1
22/30	50	31 43	S2-S2-S0	3RT2035-10	3RT2026-10	3RA2434-8XF32-1
37	80	62.1 77.8		3RT2035-10	3RT2027-10	3RA2435-8XF32-1
45	86	69 86		3RT2036-10	3RT2028-10	3RA2436-8XF32-1
55	115	77.6 108.6	S2-S2-S2	3RT2037-10	3RT2035-10	3RA2437-8XF32-1
				Spring-type contains terminals		Spring-type terminals
5.5	12	9.5 13.8	S00-S00-S00	3RT2015-2	3RT2015-2	3RA2415-8XF31-2
7.5	16	12.1 17		3RT2017-2	3RT2015-2	3RA2416-8XF31-2
11	25	19 25		3RT2018-2	3RT2016-2	3RA2417-8XF31-2
11	25	19 25	S0-S0-S0	3RT2024-20	3RT2024-20	3RA2423-8XF32-2
15	32	24.1 34		3RT2026-20	3RT2024-20	3RA2425-8XF32-2
18.5	40	34.5 40		3RT2026-20	3RT2024-20	3RA2425-8XF32-2
22	50	31 43		3RT2027-20	3RT2026-20	3RA2426-8XF32-2

Note:

The selection of contactor types refers to fused designs.

Function modules for wye-delta starting

The 3RA2816-0EW20 wye-delta function module (see page 3/187) replaces the complete wiring in the control circuit and can be used in the voltage range from 24 to 240 V AC/DC. It is snapped onto the front of the contactor assembly size S00, S0 or S2.

One function module comprises a complete module kit:

- 3RA2912-0 basic module with integrated control logic and time setting
- Two 3RA2911-0 coupling modules with corresponding connecting cables

The scope of supply thus comprises a complete module kit for one contactor assembly for wye-delta starting size S00, S0 or S2, regardless of the connection method.

Data of the control circuit

- Wide voltage range 24 to 240 V AC/DC
- Time setting range 0.5 to 60 s (3 selectable settings)
- Dead interval of 50 ms, non-adjustable

Surge suppression

Surge suppression (varistor) is included in the function modules for wye-delta starting

Contactor Assemblies 3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Motor protection

As overload protection, the 3RU21 or 3RB3 overload relays (see table below) or 3RN1 thermistor motor protection releases can be used.

The overload relay can be either mounted onto the line contactor or separately fitted. It must be set to 0.58 times the rated motor current.

Overload relays for motor protection, see Chapter 7 "Protection Equipment" → "Overload Relays" → "SIRIUS 3RB3 Electronic Overload Relays".

Components for customer assembly

Assembly kits with wiring modules and mechanical connectors are available for contactor assemblies for wye-delta starting. Contactors, overload relays, function modules for wye-delta starting or wye-delta timing relays, auxiliary switches for electrical interlock – if required also infeed terminals and base plates – must be ordered separately.

The wiring kits for sizes S00 to S2 contain the top and bottom main conducting path connections between the line and delta contactors (top) and between the delta and star contactors (bottom).

Assemblies 3RT20	Accessories for customer assembly		Overload relay, therma (CLASS 10 trip class)	al	Overload relay, electro (CLASS 10E trip class	
Rating	Function modules for wye-delta starting	Assembly kit B, for single infeed	Setting range	Article No.	Setting range	Article No.
kW	,	Ü	Α		А	
	Without external connection	Screw terminals	Screw terminals	(Screw terminals	(
5.5	3RA2816-0EW20	3RA2913-2BB1 ¹⁾	5.5 8	3RU2116-1HB0	4 16	3RB3016-1TB0
7.5			7 10	3RU2116-1JB0		
11			11 16	3RU2116-4AB0		
11	3RA2816-0EW20	3RA2923-2BB1 ¹⁾	11 16	3RU2126-4AB0	6 25	3RB3026-1QB0
15			14 20	3RU2126-4BB0		
18.5			20 25	3RU2126-4DB0		
22			20 25	3RU2126-4DB0		
22/30	3RA2816-0EW20	3RA2933-2C ³⁾	18 25	3RU2136-4DB0	12 50	3RB3036-1UB0
37		3RA2933-2C	40 50	3RU2136-4HB0	20 80	3RB3036-1WB0
45		3RA2933-2C	40 50	3RU2136-4HB0		
55		3RA2933-2BB1 ⁴⁾	54 65	3RU2136-4JB0		
	Without external connection	Spring-type contained terminals	Spring-type terminals		Spring-type terminals	0
5.5	3RA2816-0EW20	3RA2913-2BB2 ¹⁾	5.5 8	3RU2116-1HC0	4 16	3RB3016-1TE0
7.5			7 10	3RU2116-1JC0		
11			11 16	3RU2116-4AC0		
11	3RA2816-0EW20	3RA2923-2BB2 ²⁾	11 16	3RU2126-4AC0	6 25	3RB3026-1QE0
15			14 20	3RU2126-4BC0		
18.5			20 25	3RU2126-4DC0		
22			20 25	3RU2126-4DC0		
22/30	3RA2816-0EW20	3RA2933-2C ³⁾	18 25	3RU2136-4DC0	12 50	3RB3036-1UD0
37		3RA2933-2C	40 50	3RU2136-4HC0	20 80	3RB3036-1WD0
45		3RA2933-2C	40 50	3RU2136-4HC0		
55		3RA2933-2BB2 ⁵⁾	54 65	3RU2136-4JC0		

- 1) The assembly kit contains: mechanical interlock, 4 connecting clips; wiring modules on the top (connection between line and delta contactor) and on the bottom (connection between delta and star contactor); star jumper and auxiliary circuit wiring.
- 2) The assembly kit contains: mechanical interlock, 4 connecting clips; wiring modules on the top (connection between line and delta contactor) and on the bottom (connection between delta and star contactor); star jumper.
- 3) The assembly kit contains: 2 connecting pins, wiring modules on the top and bottom (S2 - S0) for the main circuit, a S0 star jumper, a spacer and a cable set for the auxiliary circuit, and a cable for connecting the A2 coil contact from the line contactor to the A2 coil contact of the delta contactor.
- 4) The assembly kit contains: 4 connecting pins, wiring modules on the top and bottom for the main circuit and the auxiliary circuit, an S2 star jumper and a cable for connecting the A2 coil contact from the line contactor to the A2 coil contact of the delta contactor.
- 5) The assembly kit contains: 4 connecting pins, wiring modules on the top and bottom for the main circuit, an S2 star jumper, a cable set for the auxiliary circuit and a cable for connecting the A2 coil contact from the line contactor to the A2 coil contact of the delta contactor.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Article No. scheme

Digit of the Article No.	1st - 3rd	4th	5th	6th	7th		8th	9th	10th	11th	12th		13th	14th	15th	16th
						-						-				
SIRIUS contactor assemblies	3 R A															
2nd generation		2														
Device type (e.g. 4 = contactor assembly for wye-delta starting)			4													
Contactor size (1 = S00, 2 = S0, 3 = S2)																
Power dependent on size (e.g. 5 = 15 kW for S0)																
Type of overload relay (8X = without)																
Assembly (B = ready-assembled, E, H = ready-assembled with commun	ication)															
Interlock (3 = mechanical and electrical)																
Free auxiliary switches (e.g. S00: 1 = 3 NO total, S0: 2 = 3 NO + 3 NC total	al)															
Connection type (1 = screw, 2 = spring)																
Operating range / solenoid coil circuit (e.g. A = AC standard / without	t)															
Rated control supply voltage (e.g. L2 = 230 V, 50/60 Hz)																
Example	3 R A	2	4	2	5	_	8	Х	F	3	2	-	1	Α	L	2

Note:

The article number scheme is presented here merely for information purposes and for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the catalog in the Selection and ordering data.



3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Technical specifications

All technical specifications not mentioned in the table below are identical to those of the individual 3RT2 contactors and 3RU2 overload relays

Type Sizes SS			3RA2415 00-00-00	3RA2416 00-00-00	3RA2417 00-00-00	3RA2423 0-0-0	3RA2425 0-0-0	3RA242 0-0-0
Dimensions (W x H x D) with function module								
• AC operation ¹⁾		mm	135 x 68 x	145 / 135 x 8	4 x 145	135 x 101 x	x 171 / 135 x	114 x 171
	W -	mm		145 / 135 x 8			x 181 / 135 x	
General data								
Individual contactors								
Q11 line contactor Q13 delta contactor Q12 star contactor		Type Type Type	3RT2015 3RT2015 3RT2015	3RT2017 3RT2017 3RT2015	3RT2018 3RT2018 3RT2016	3RT2024 3RT2024 3RT2024	3RT2026 3RT2026 3RT2024	3RT202 3RT202 3RT202
Mechanical endurance	Operatii	71	3 million					
Unassigned auxiliary contacts of the individual contacto	rs		2)					
Short-circuit protection								
Main circuit without overload relays ³⁾								
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE with single or double infeed								
Highest rated current of the fuse according to IEC 60947-4-1								
Type of coordination "1"		Α	35	35	63	63	100	125
Type of coordination "2"		Α	20	20	25	25	35	63
Control circuit								
Short-circuit test								
 with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current I_k = 1 kA acc. to IEC 60947-5-1 		A A	10 6 ⁴⁾ , if the a in the conta	uxiliary conta	ct of the ove	rload relay is	connected	
• with miniature circuit breakers with C characteristic with short-circuit current $I_{\rm k}$ = 400 A		A A	10 6 ⁴⁾ , if the auxiliary contact of the overload relay is connected in the contactor coil circuit.					
Main circuit								
Current-carrying capacity with reversing time up to 10 s								
• Rated operational current I _e	At 400 V 690 V	A A	12 6.9	17 9	25 20.8	25 20.8	40 22.5	55 35
 Rated power for three-phase motors 	At 230 V 400 V	kW kW	3.3 5.8	4.7 8.2	7.2 12.5	7.2 12.5	12 21	00
with 50 Hz and 60 Hz	690 V	kW	5.8	7.5	18	18	20.4	16.6 30.1 33
		kW h ⁻¹		7.5 15	18 15	18 15		16.6 30.1
with 50 Hz and 60 Hz			5.8				20.4	16.6 30.1 33
with 50 Hz and 60 Hz • Switching frequency with overload relay			5.8				20.4	16.6 30.1 33
with 50 Hz and 60 Hz • Switching frequency with overload relay Current-carrying capacity with reversing time up to 15 s	690 V At 400 V	h ⁻¹	5.8 15	15 17	15 25	15 25	20.4 15 31	16.6 30.1 33 15
with 50 Hz and 60 Hz • Switching frequency with overload relay Current-carrying capacity with reversing time up to 15 s • Rated operational current I _e • Rated power for three-phase motors	690 V At 400 V 690 V At 230 V 400 V	h-1 A A kW kW	5.8 15 12 6.9 3.3 5.8	15 17 9 4.7 8.2	25 20.8 7.2 12.5	25 20.8 7.2 12.5	20.4 15 31 22.5 9.4 16.3	16.6 30.1 33 15 44 35 13.8 24
with 50 Hz and 60 Hz Switching frequency with overload relay Current-carrying capacity with reversing time up to 15 s Rated operational current I _e Rated power for three-phase motors with 50 Hz and 60 Hz	690 V At 400 V 690 V At 230 V 400 V	h-1 A A kW kW kW	5.8 15 12 6.9 3.3 5.8 5.8	17 9 4.7 8.2 7.5	25 20.8 7.2 12.5 18	25 20.8 7.2 12.5 18	20.4 15 31 22.5 9.4 16.3 20.4	16.6 30.1 33 15 44 35 13.8 24 33
with 50 Hz and 60 Hz Switching frequency with overload relay Current-carrying capacity with reversing time up to 15 s Rated operational current I _e Rated power for three-phase motors with 50 Hz and 60 Hz Switching frequency with overload relay	690 V At 400 V 690 V At 230 V 400 V	h-1 A A kW kW kW	5.8 15 12 6.9 3.3 5.8 5.8	17 9 4.7 8.2 7.5	25 20.8 7.2 12.5 18	25 20.8 7.2 12.5 18	20.4 15 31 22.5 9.4 16.3 20.4	16.6 30.1 33 15 44 35 13.8 24 33
with 50 Hz and 60 Hz Switching frequency with overload relay Current-carrying capacity with reversing time up to 15 s Rated operational current I _e Rated power for three-phase motors with 50 Hz and 60 Hz Switching frequency with overload relay Current-carrying capacity with reversing time up to 20 s	At 400 V 690 V At 230 V 400 V 690 V	h-1 A A kW kW kW h-1	5.8 15 12 6.9 3.3 5.8 5.8 15	15 17 9 4.7 8.2 7.5 15	25 20.8 7.2 12.5 18 15	25 20.8 7.2 12.5 18 15	20.4 15 31 22.5 9.4 16.3 20.4 15	16.6 30.1 33 15 44 35 13.8 24 33 15

¹⁾ Dimensions for devices with screw terminals / spring-type terminals.

²⁾ For circuit diagrams of the control circuit, see "Operating Instructions", http://support.automation.siemens.com/WW/view/en/34291016.

³⁾ For short-circuit protection with overload relays, see the Configuration Manual "Configuring SIRIUS Innovations – Selection Data for Fuseless and Fused Load Feeders", http://support.automation.siemens.com/WW/view/en/39714188.

⁴⁾ Up to $I_{\rm k}$ < 0.5 kA; \leq 260 V.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Type Sizes SSS			3RA2434 2-2-0	3RA2435 2-2-0	3RA2436 2-2-0	3RA2437 2-2-2
Dimensions (W x H x D) with function module						
• Sorow terminals	W	mm	177.5 x 142	2 x 223		
General data						
Individual contactors						
Q11 line contactor		Type	3RT2035	3RT2035	3RT2036	3RT2037
Q13 delta contactor		Type	3RT2035	3RT2035	3RT2036	3RT2037
Q12 star contactor	0 "	Туре	3RT2026	3RT2027	3RT2028	3RT2035
Mechanical endurance	· · · · · · · · · · · · · · · · · · ·	ng cycles	3 million			
Unassigned auxiliary contacts of the individual contactor	ors		1)			
Short-circuit protection						
Main circuit without overload relays ²⁾						
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE with single or double infeed						
Highest rated current of the fuse according to IEC 60947-4-1						
Type of coordination "1"		Α	160	200	250	250
Type of coordination "2"		Α	80	80	125	160
Control circuit						
Short-circuit test						
 with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current I_k = 1 kA acc. to IEC 60947-5-1 		A A	10 6 ³⁾ , if the ar	uxiliary conta actor coil circ	act of the ove cuit.	rload relay is connected
with miniature circuit breakers with C characteristic with short-circuit current $I_{\rm k}=400~{\rm A}$		A A	10 6 ³⁾ , if the ar	uxiliary conta	act of the ove	rload relay is connected
Main circuit						
Current-carrying capacity with reversing time up to 10 s						
$ullet$ Rated operational current $I_{ m e}$	At 400 V 690 V	A A	On request			
Rated power for three-phase motors	At 230 V	kW	On request			
with 50 Hz and 60 Hz	400 V	kW	On request			
Cuitabina franconou vitto consile et selecc	690 V	kW h ⁻¹	On request			
Switching frequency with overload relay		u.	15			
Current-carrying capacity with reversing time up to 15 s						
Rated operational current I _e	At 400 V 690 V	A A	On request			
 Rated power for three-phase motors with 50 Hz and 60 Hz 	At 230 V 400 V 690 V	kW kW kW	On request On request On request			
Switching frequency with overload relay		h ⁻¹	15			
Current-carrying capacity with reversing time up to 20 s						
Rated operational current I _e	At 400 V 690 V	A A	On request On request			
 Rated power for three-phase motors with 50 Hz and 60 Hz 	At 230 V 400 V 690 V	kW kW kW	On request On request On request			
Switching frequency with overload relay		h ⁻¹	15			
For circuit diagrams of the control circuit, see "Operating"	Inetructions"					

¹⁾ For circuit diagrams of the control circuit, see "Operating Instructions", http://support.automation.siemens.com/WW/view/en/34291016.

²⁾ For short-circuit protection with overload relays, see the Configuration Manual "Configuring SIRIUS Innovations – Selection Data for Fuseless and Fused Load Feeders", http://support.automation.siemens.com/WW/view/en/39714188.

³⁾ Up to $I_{\rm K}$ < 0.5 kA; \leq 260 V.




3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Selection and ordering data

Fully wired and tested contactor assemblies \cdot Size S00-S00-S00 \cdot up to 11 kW

The figure shows the version with screw terminals

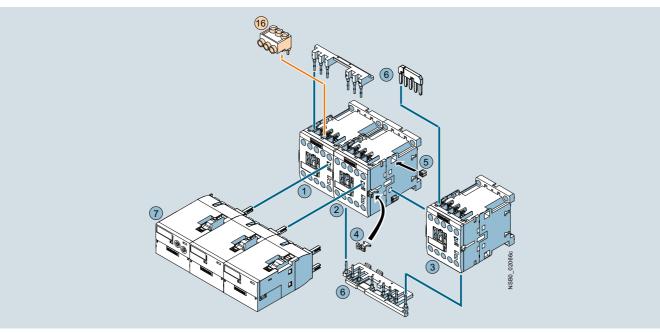

Mountable accessories (optional)							
To be ordered separately	Article No.	Page					
16 Three-phase infeed terminal ²⁾	3RA2913-3K	3/186					

Complete contactor assemblies									
Individua	l parts	Article No.		Page					
		Q11 ¹⁾	Q13	Q12					
123	Contactor, 5.5 kW	3RT2015	3RT2015	3RT2015	3/35, 3/42				
123	Contactor, 7.5 kW	3RT2017	3RT2017	3RT2015	3/35, 3/42				
123	Contactor, 11 kW	3RT2018	3RT2018	3RT2016	3/35, 3/42				
456	Assembly kit comprising	3RA2913-2		3/185					
	4 Mechanical interloc	k							
	5 4 connecting clips								
	6 Wiring modules on for connecting the								
7	Function modules for wye-delta starting	3RA2816-0		3/187					

 $^{^{1)}\,}$ The version with 1 NO is required for momentary-contact operation.

Note:

When using the function modules for contactor assemblies for wye-delta starting, no other auxiliary switches are allowed to be connected to the basic units.

²⁾ Part (6) can only be mounted with contactors with screw terminal.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Fully wired and tested contactor assemblies · Size S00-S00-S00 · up to 11 kW

 $\begin{array}{ll} PU \text{ (UNIT, SET, M)} = 1 \\ PS^* & = 1 \text{ unit} \\ PG & = 41B \end{array}$







3RA2418XF31-1A.0	3RA2418XF31-2A.0

311A2410AL31-1BB4				311A2410A131-1A.0			311A2410A131-2A.0			
Rated data AC-3 Operational		of three-phase	e motors	Rated control supply voltage U_s^{-1}	DT	Screw terminals	(1)	DT	Spring-type terminals	
current I _e up to	at 50 Hz			O _S		Article No.	Price		Article No.	Price
400 V	230 V	400 V	690 V				per PU			per PU
Α	kW	kW	kW	V						
AC operation,	50/60 Hz									
12	3.3	5.5	9.2	24 AC 110 AC 230 AC	A A A	3RA2415-8XF31-1AB0 3RA2415-8XF31-1AF0 3RA2415-8XF31-1AP0	1	A B A	3RA2415-8XF31-2AB0 3RA2415-8XF31-2AF0 3RA2415-8XF31-2AP0	
16	4.7	7.5	9.2	24 AC 110 AC 230 AC	A A A	3RA2416-8XF31-1AB0 3RA2416-8XF31-1AF0 3RA2416-8XF31-1AP0	1	B B A	3RA2416-8XF31-2AB0 3RA2416-8XF31-2AF0 3RA2416-8XF31-2AP0	
25	5.5	11	11	24 AC 110 AC 230 AC	A A A	3RA2417-8XF31-1AB0 3RA2417-8XF31-1AF0 3RA2417-8XF31-1AP0	1	B B A	3RA2417-8XF31-2AB0 3RA2417-8XF31-2AF0 3RA2417-8XF31-2AP0	
DC operation										
12	3.3	5.5	9.2	24 DC	Α	3RA2415-8XF31-1BB4	,	Α	3RA2415-8XF31-2BB4	
16	4.7	7.5	9.2	24 DC	Α	3RA2416-8XF31-1BB4		Α	3RA2416-8XF31-2BB4	
25	5.5	11	11	24 DC	Α	3RA2417-8XF31-1BB4		Α	3RA2417-8XF31-2BB4	
For IO-Link con	nnection									
12	3.3	5.5	9.2	24 DC	Α	3RA2415-8XE31-1BB4	,	Α	3RA2415-8XE31-2BB4	
16	4.7	7.5	9.2	24 DC	Α	3RA2416-8XE31-1BB4		Α	3RA2416-8XE31-2BB4	
25	5.5	11	11	24 DC	Α	3RA2417-8XE31-1BB4	,	Α	3RA2417-8XE31-2BB4	
For AS-Interfac	ce conne	ction								
12	3.3	5.5	9.2	24 DC	В	3RA2415-8XH31-1BB4	,	Α	3RA2415-8XH31-2BB4	
16	4.7	7.5	9.2	24 DC	Α	3RA2416-8XH31-1BB4	1	В	3RA2416-8XH31-2BB4	
25	5.5	11	11	24 DC	Α	3RA2417-8XH31-1BB4		Α	3RA2417-8XH31-2BB4	

 $^{^{1)}}$ Coil operating range at 50 Hz: 0.8 ... 1.1 x $U_{\rm S}$; at 60 Hz: 0.85 ... 1.1 x $U_{\rm S}$




3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Fully wired and tested contactor assemblies · Size S0-S0-S0 · up to 22 kW

The figure shows the version with screw terminals

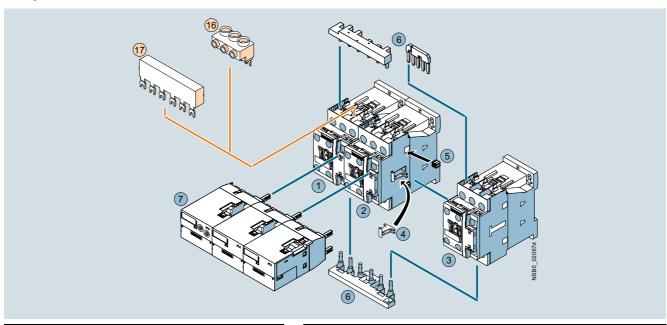

Modificable accessories (option	iai <i>)</i>	
To be ordered separately	Article No.	Page
 Three-phase infeed terminal¹⁾ Three-phase busbar¹⁾ 	3RV2925-5AB 3RV1915-1AB	3/186 3/186

Complete contactor assemblies										
е										
, 3/44										
, 3/44										
, 3/44										
5										
7										

3RA2816-0EW20

Function modules

for wye-delta starting

Note:

When using the function modules for contactor assemblies for wye-delta starting, no other auxiliary switches are allowed to be connected to the basic units.

3/187

¹⁾ The parts 6 and 7 can only be mounted with contactors with screw terminal.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies


SIRIUS 3RA24 contactor assemblies for wye-delta starting

Fully wired and tested contactor assemblies · Size S0-S0-S0 · up to 22 kW

PU (UNIT, SET, M) = 1 PS* PG = 1 unit = 41B







3RA2428XE32-1BB4	3RA2428XF32-1A.2	3RA2428XF32-2A.2

Rated data AC-3				Rated control	DT	Screw terminals	(1)	DT	Spring-type terminals	8
Operational current I_e up to	Ratings of at 50 Hz	of three-phase and	supply voltage U_s^{-1}		Article No.	Price		Article No.	Price	
400 V	230 V	400 V	690 V				per PU			per PU
Α	kW	kW	kW	V						
AC operation,	50/60 Hz									
25	7.1	11	19	24 AC 110 AC 230 AC	A A B	3RA2423-8XF32-1AC2 3RA2423-8XF32-1AG2 3RA2423-8XF32-1AL2		A B B	3RA2423-8XF32-2AC2 3RA2423-8XF32-2AG2 3RA2423-8XF32-2AL2	
32 / 40	11.4	15 / 18.5	19	24 AC 110 AC 230 AC	A A B	3RA2425-8XF32-1AC2 3RA2425-8XF32-1AG2 3RA2425-8XF32-1AL2		A B B	3RA2425-8XF32-2AC2 3RA2425-8XF32-2AG2 3RA2425-8XF32-2AL2	
50		22	19	24 AC 110 AC 230 AC	A A B	3RA2426-8XF32-1AC2 3RA2426-8XF32-1AG2 3RA2426-8XF32-1AL2		B B B	3RA2426-8XF32-2AC2 3RA2426-8XF32-2AG2 3RA2426-8XF32-2AL2	
DC operation										
25	7.1	11	19	24 DC	Α	3RA2423-8XF32-1BB4		Α	3RA2423-8XF32-2BB4	
32 / 40	11.4	15 / 18.5	19	24 DC	Α	3RA2425-8XF32-1BB4		Α	3RA2425-8XF32-2BB4	
50		22	19	24 DC	Α	3RA2426-8XF32-1BB4		Α	3RA2426-8XF32-2BB4	
For IO-Link co.	nnection									
25	7.1	11	19	24 DC	Α	3RA2423-8XE32-1BB4		В	3RA2423-8XE32-2BB4	
32 / 40	11.4	15 / 18.5	19	24 DC	Α	3RA2425-8XE32-1BB4		В	3RA2425-8XE32-2BB4	
50		22	19	24 DC	Α	3RA2426-8XE32-1BB4		В	3RA2426-8XE32-2BB4	
For AS-Interfac	ce connec	tion								
25	7.1	11	19	24 DC	В	3RA2423-8XH32-1BB4		Α	3RA2423-8XH32-2BB4	
32 / 40	11.4	15 / 18.5	19	24 DC	В	3RA2425-8XH32-1BB4		В	3RA2425-8XH32-2BB4	
50		22	19	24 DC	Α	3RA2426-8XH32-1BB4		В	3RA2426-8XH32-2BB4	

¹⁾ Coil operating range - at 50 Hz: 0.8 ... 1.1 x U_s; - at 60 Hz: 0.85 ... 1.1 x U_s.




3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Fully wired and tested contactor assemblies · Size S2-S2-S0 · up to 45 kW and S2-S2-S2 · 55 kW

The figure shows the version with screw terminals in S2-S2-S2

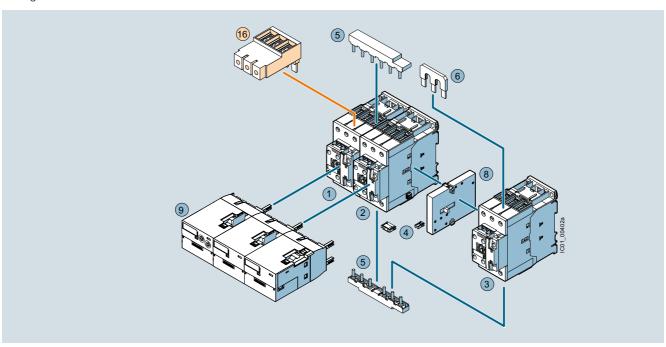

Mountable accessories (option	nal)	
To be ordered separately	Article No.	Page
Three-phase infeed terminal ¹⁾	3RV2935-5A	3/186

Complete contactor assemblies										
Individua	al pa	rts	Article No	•		Page				
			Q11	Q13	Q12					
123	Cor	ntactor, 22/30 kW	3RT2035	3RT2035	3RT2026	3/40, 3/48				
123	Cor	ntactor, 37 kW	3RT2035	3RT2035	3RT2027	3/40, 3/48				
123	Cor	ntactor, 45 kW	3RT2036	3RT2036	3RT2028	3/40, 3/48				
123	Cor	ntactor, 55 kW	3RT2037	3RT2037	3RT2035	3/40, 3/48				
4 7	Ass	embly kit S2-S2-S2	3RA2933-2	2BB1		3/185				
	The	assembly kit conta	ins:							
	4	4 connecting pins	s for 3 conta	ctors						
	(5)	Wiring modules on the top and bottom for connecting the main and auxiliary circuits								
	6 1 star jumper S2									
	7	1 cable for connect contactor to the A2								

3RA2816-0EW20

Mechanical interlock 3RA2934-2B

Function modules for wye-delta starting

3/186

3/187

¹⁾ Three-phase infeed terminal 6 can only be mounted with contactors with screw terminal.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Fully wired and tested contactor assemblies · Size S2-S2-S0 · up to 45 kW and S2-S2-S2 · 55 kW ₩⊒₩

PU (UNIT, SET, M) = 1 PS* PG = 1 unit = 41B





3RA243.-8XE32-1NB3

3RA2437-8XF32-1A.2

SINZ40OALOZ- INDO						311A2437-0A1 32-1A . 2					
Rated data AC-3 Operational	Detings	of three whee	a matara	Rated control supply voltage Us		Screw terminals	(+)	DT	Spring-type terminals	8	
current I_e up to	at 50 Hz	of three-phase and	e motors			Article No.	Price		Article No.	Price	
400 V	230 V	400 V	690 V				per PU			per PU	
A	kW	kW	kW	V							
AC operation,	50/60 Hz										
50/65	19.6	22/30	34	24 AC ¹⁾	В	3RA2434-8XF32-1AC2					
				110 AC ²⁾	В	3RA2434-8XF32-1AG2					
00	0.5	07	00	230 AC ²⁾ 24 AC ¹⁾	^	3RA2434-8XF32-1AL2					
80	25	37	63	110 AC ²⁾	A A	3RA2435-8XF32-1AC2 3RA2435-8XF32-1AG2					
				230 AC ²⁾	\blacktriangleright	3RA2435-8XF32-1AL2					
86	27	45	63	24 AC ¹⁾	Α	3RA2436-8XF32-1AC2					
				110 AC ²⁾ 230 AC ²⁾	A	3RA2436-8XF32-1AG2 3RA2436-8XF32-1AL2					
115	37	55	93	24 AC ¹⁾	В	3RA2437-8XF32-1AC2					
	0.	••	00	110 AC ²⁾	В	3RA2437-8XF32-1AG2					
				230 AC ²⁾	<u> </u>	3RA2437-8XF32-1AL2			-		
AC/DC operati				1)							
50/65	19.6	22/30	34	20 33 AC/DC ¹⁾		3RA2434-8XF32-1NB3					
80	25	37	63	20 33 AC/DC ¹⁾		3RA2435-8XF32-1NB3					
86	27	45	63	20 33 AC/DC ¹⁾		3RA2436-8XF32-1NB3					
115	37	55	93	20 33 AC/DC ¹⁾	В	3RA2437-8XF32-1NB3					
DC operation						l					
For IO-Link co											
50/65	19.6	22/30	34	24 DC ¹⁾	В	3RA2434-8XE32-1NB3					
80	25	37	63	24 DC ¹⁾	В	3RA2435-8XE32-1NB3					
86	27	45	63	24 DC ¹⁾	В	3RA2436-8XE32-1NB3					
115	37	55	93	24 DC ¹⁾	В	3RA2437-8XE32-1NB3					
For AS-Interfac	ce conne	ction									
50/65	19.6	22/30	34	24 DC ¹⁾	В	3RA2434-8XH32-1NB3					
80	25	37	63	24 DC ¹⁾	В	3RA2435-8XH32-1NB3					
86	27	45	63	24 DC ¹⁾	В	3RA2436-8XH32-1NB3			-		
115	37	55	93	24 DC ¹⁾	В	3RA2437-8XH32-1NB3					
43											

¹⁾ Operating range:
- AC coil: 0.85 ... 1.1 x U_s
- AC/DC coil: 0.8 ... 1.1 x U_s
- DC coil: 0.8 ... 1.1 x U_s

²⁾ AC coil operating range - at 50 Hz: 0,8 ... 1,1 x U_s; - at 60 Hz: 0,85 ... 1,1 x U_s.



3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Components for customer assembly

PU (UNIT, SET, M) = 1

PS* PG = 1 unit (unless otherwise specified)







2933-2BB1	3RA2923
12900-2001	JIMZJZJ

For contactors	Size	Version
Type		

DT Screw terminals **(1)** Spring-type terminals

3RA2923-2BB2

Type				Article No.	Price per PU	Article No.	Price per PU
Assemb	oly kits ¹⁾ fo	r making 3-pole contactor assemblies					
3RT201	S00-S00- S00	The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactors; a star jumper, wiring modules on the top and bottom					
		 For main, auxiliary and control circuits 	>	3RA2913-2BB1		3RA2913-2BB2	
3RT202	S0-S0-S0	The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactors, a star jumper, wiring modules on the top and bottom					
		For main, auxiliary and control circuits	>	3RA2923-2BB1			
		Only for main circuit ²⁾				3RA2923-2BB2	
3RT202	S0-S0-S0	The assembly kit contains: mechanical interlock; 4 connecting clips for 3 contactors, wiring modules on the top and bottom, 3-phase infeed terminals					
		 For main, auxiliary and control circuits 	В	3RA2924-2BB1			
3RT203	S2-S2-S0 NEW	4 connecting pins for 3 contactors an S0 star jumper, a spacer, wiring modules on the top and bottom (S2-S0) for the main circuit, a cable set for the auxiliary circuit, a cable for connecting the A2 coil contact from the line contactor to the A2 coil contact of the delta contactor	•	3RA2933-2C	>	3RA2933-2C	
3RT203	S2-S2-S2 NEW	The assembly kit contains: 4 connecting pins for 3 contactors; an S2 star jumper and					
		 wiring modules on the top and bottom for the main circuit and the auxiliary circuit, a cable for connecting the A2 coil contact from the line contactor to the A2 coil contact of the delta contactor. 	>	3RA2933-2BB1			
		Wiring modules on the top and bottom for the main circuit, a cable set for the auxiliary circuit and a cable for connecting the A2 coil contact from the line contester to the A2 coil.		-	В	3RA2933-2BB2	

¹⁾ When using the function modules for wye-delta starting, the wiring modules for the auxiliary current are not required.

from the line contactor to the A2 coil contact of the delta contactor.

²⁾ Version in size S0 with spring-type terminals:
Only the wiring modules for the main circuit are included. No connectors are included for the auxiliary and control circuit.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

PU (UNIT, SET, M) = 1 PS* = 1 unit (unless otherwise specified) PG = 41B











3RT1936-4BA31 3RV1915-1AB

For contactors	Size	Version		DT	Screw terminals	(1)	TC	Spring-type terminals	<u></u>
Туре					Article No.	Price per PU		Article No.	Price per PU
Three-ph	ase infee	d terminals							
		Infeed terminal blocks for the line contactor for large conductor cross-sections							
3RT201	S00	 Conductor cross-section 6 mm² 	PS = 10 units	Α	3RA2913-3K				
3RT202	S0	 Conductor cross-section 16 mm² 		•	3RV2925-5AB				
3RT203	S2 NEW	 Conductor cross-section max. 70 mm² 		Α	3RV2935-5A				
				Α	3RV2935-5E				
Three-ph	ase busb	ars							
3RT202	S0	Bridging phase-by-phase of all input terminals of the line contactor (Q11) and the delta contactor (Q13)		•	3RV1915-1AB				
Links for	parallelir	ng, 3-pole (star jumpers)							
3RT201	S00	Without connection terminal		>	3RT1916-4BA31	A	Д	3RT2916-4BA32	
3RT202	S0	the links for paralleling can be reduced by one pole)		>	3RT1926-4BA31	P	4	3RT2926-4BA32	
3RT203	S2 NEW	- one pole)		>	3RT1936-4BA31	>	>	3RT1936-4BA31	



3RA2932-2F

Mechan	ical interlocks				
3RT203	S2-S2-S0, For size S2, the mechanical locking S2-S2-S2 device must be ordered separately	•	3RA2934-2B	•	3RA2934-2B
Base pla	ates				
3RT203	S2-S2-S0, For configuring contactor assemblies for S2-S2-S2 wye-delta starting	В	3RA2932-2F	В	3RA2932-2F

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA24 contactor assemblies for wye-delta starting

Components for customer assembly

PU (UNIT, SET, M) = 1

PS* PG = 1 unit (unless otherwise specified)

= 41B







Spring-type terminals

For contactors	Size	Version	DT	Article No.	Price per PU		Article No.	Price per PU
Type								
Function	modules	s for wye-delta starting						
3RT201, 3RT202,	S00, S0,	Comprising one basic module and two coupling modules	А	3RA2816-0EW20		Α	3RA2816-0EW20	
3RT203	S2	Rated control supply voltage 24 240 V AC/DC						
		Time setting range 0.5 60 s (10, 30, 60 s selectable)						

Accessories for 3RA28 function modules

3RT201,	S00,	Sealable covers	PS = 5 units	Α	3RA2910-0	Α	3RA2910-0
3RT202,	S0,						
3RT203	S2						

Screw terminals

3RA2910-0

Function modules for wye-delta starting for connection to the control system

3RT201, 3RT202, 3RT203	S00, S0, S2	IO-Link connection, comprising one basic module and two coupling modules, plus an additional module connector for assembling an IO-Link group	А	3RA2711-1CA00	A	3RA2711-2CA00
3RT201, 3RT202, 3RT203	S00, S0, S2	AS-Interface connection, comprising one basic module and two coupling modules	А	3RA2712-1CA00	А	3RA2712-2CA00
Accesso	ories for	3RA27 function modules				
3RT201, 3RT202, 3RT203	S00, S0, S2	 Module connector set, comprising: 2 module connectors, 14-pole, short 2 interface covers 	А	3RA2711-0EE10	A	3RA2711-0EE10
		Module connectors				
3RT201, 3RT202, 3RT203	S00, S0, S2	• 14-pole, 9 cm For size jump S00-S0 + 1 space	А	3RA2711-0EE06	А	3RA2711-0EE06
3RT201, 3RT202, 3RT203	S00, S0, S2	14-pole, 26 cm For various space combinations	А	3RA2711-0EE07	A	3RA2711-0EE07
3RT201, 3RT202, 3RT203	S00, S0, S2	14-pole, 33.5 cm For various space combinations	А	3RA2711-0EE08	А	3RA2711-0EE08
3RT201, 3RT202,	S00, S0,	 10-pole, 9 cm For separate control signal infeed 	А	3RA2711-0EE16	А	3RA2711-0EE16

PS = 5 units

Operator panels for IO-Link, see page 3/202.

Note:

3RT203

3RT201,

3RT202, 3RT203

S2

S00,

When using the function modules for contactor assemblies for wye-delta starting, no other auxiliary switches are allowed to be connected to the basic units.

within an IO-Link group

Sealable covers

3RA2910-0

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA14 contactor assemblies for wye-delta starting

Overview

The 3RA14 contactor assemblies for wye-delta starting are designed for standard applications.

Note:

Contactor assemblies for wye-delta starting in special applications such as very heavy starting ¹⁾ or wye-delta starting of special motors must be customized. Help with designing such special applications is available from Technical Assistance.

The 3RA14 contactor assemblies for wye-delta starting can be ordered as follows:

Size S3

- Fully wired and tested, with electrical interlock, reversing time up to 10 s
- · As individual parts for customer assembly

Sizes S6 to S12

· Only as individual parts for customer assembly

There is also a range of accessories (auxiliary switch blocks, surge suppressors, etc.) that must be ordered separately.

Overload relays for motor protection, see Chapter 7, "Protection Equipment" → "Overload Relays" → "SIRIUS 3RB2 Electronic Overload Relays".

The 3RA14 contactor assemblies have screw terminals. Sizes S2 to S3 are suitable for screw fixing and snap-on mounting onto TH 35 standard mounting rails.

Complete units

Fully wired and tested 3RA14 contactor assemblies have one unassigned NO contact which is mounted onto the front of the Q3 delta contactor.

With the preassembled contactor assembly sizes S2 and S3, 22 to 75 kW, a timing relay is laterally mounted. A dead interval of 50 ms on reversing is already integrated in the time relay function.

- 1) For effective support from Technical Assistance you must provide the following details:
 - Rated motor voltage
- Rated motor current
- Service factor, operating values
- Motor starting current factor
- Starting time
- Ambient temperature

Rated data at 50 Hz 400 V A	AC		Size			
Rating P	Operational current I_e	Motor current		Line/delta contactor	Star contactor	Article No. complete assembly
kW	Α	Α				
55	115	77.6 108.6	S3-S3-S2	3RT1044	3RT1035	3RA1444-8XC21-1
75	150	120.7 150		3RT1045	3RT1036	3RA1445-8XC21-1
90	160	86 160	S6-S6-S3	3RT1054	3RT1044	-
110	195	86 195				
132	230	86 230		3RT1055	3RT1045	
160	280	86 280		3RT1056	3RT1046	
200	350	95 350	S10-S10-S6	3RT1064	3RT1054	-
250	430	95 430		3RT1065	3RT1055	
315	540	277 540	S12-S12-S10	3RT1075	3RT1064	
355	610	277 610				
400	690	277 690			3RT1065	
500	850	277 850		3RT1076	3RT1066	

Surge suppression

Size S3

All contactor assemblies can be fitted with RC elements, varistors or diode assemblies for damping opening surges in the coil. As with the individual contactors, the surge suppressors can either be plugged onto the top or bottom coil terminals.

Sizes S6 to S12

The contactors are fitted with varistors as standard.

Motor protection

As overload protection, the 3RU11 or 3RB2 overload relays (see table on the next page) or 3RN1 thermistor motor protection releases can be used.

The overload relay can be either mounted onto the line contactor or separately fitted. It must be set to 0.58 times the rated motor current.

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA14 contactor assemblies for wye-delta starting

Components for customer assembly

Assembly kits with wiring modules and, if necessary, mechanical connectors are available for contactor assemblies for wye-delta starting. Contactors, overload relays, wye-delta timing relays, auxiliary switches for electrical interlock – if required also infeed terminals, mechanical interlocks and base plates – must be ordered separately.

In the case of sizes S2 to S12 only the bottom main conducting path connection between the delta and star contactors is included in the wiring module, owing to the larger conductor cross-section at the infeed.

Note:

The selection of contactor types refers to fused design.

	Accessories for customer assemb	Accessories for customer assembly						ay, thermal rip class)		oad relay SS 10 trip	, electronic class)
P	Timing relays	Assembly kit A, for double infeed			Base plates	Sett	0	Article No.	Settin	_	Article No.
kW						Α			А		
55	3RP1574-1N.30	3RA1943-2C ¹⁾		3RT1936-4BA31	3RA1942-2E	45	63	3RU1146-4JB0	25	100	3RB2046-1EB0
75						70	90	3RU1146-4LB0			
90	3RP1574-1N.30		3RA1953-3D ²⁾	3RT1946-4BA31	3RA1952-2E				50	200	3RB2056-1FC2
110											
132											
160											
200	3RP1574-1N.30			3RT1956-4BA31	3RA1962-2E				55	250	3RB2066-1GC2
250									160	630	3RB2066-1MC2
315	3RP1574-1N.30			3RT1966-4BA31	3RA1972-2E				160	630	3RB2066-1MC2
355											
400											
500											

¹⁾ Assembly kit contains wiring module on the bottom (connection between delta and star contactor) and star jumper.

²⁾ Wiring module on top from reversing contactor assembly (note conductor cross-sections)

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA14 contactor assemblies for wye-delta starting

Technical specifications

All technical specifications not mentioned in the table below are identical to those of the individual 3RT1 contactors and 3RU1 overload relays.

Type /			3RA1444	3RA1445
Size			S3-S3-S2	S3-S3-S2
Dimensions (W x H x D) with base plate				
• DC operation	/	mm	218 x 180 x 207	
• AC operation	<u>·</u> → /	mm	218 x 180 x 194	
General data				
Individual contactors				
Q1 line contactor		Type	3RT1044	3RT1045
Q3 delta contactorQ2 star contactor		Type Type	3RT1044 3RT1035	3RT1045 3RT1036
Mechanical endurance	Operat	ing cycles		0.11.1000
Unassigned auxiliary contacts of the individual contact		3 - ,	1)	
Short-circuit protection				
Main circuit without overload relays ²⁾				
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE with single or double infeed				
Highest rated current of the fuse acc. to IEC 60947-4-1/EN 60947-4-1				
Type of coordination "1" Type of coordination "2"		A A	250 125	250 160
Control circuit				
Short-circuit test				
 with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current I_k = 1 kA acc. to IEC 60947-5-1 		A A	10 6 ³⁾ , if the auxiliary cor in the contactor coil c	ntact of the overload relay is connected ircuit
• with miniature circuit breakers with C characteristic with short-circuit current $I_{\rm k}$ = 400 A		A A	10 6 ³⁾ , if the auxiliary cor in the contactor coil c	ntact of the overload relay is connected
Main circuit			In the contactor con c	nout.
Current-carrying capacity with reversing time up to 10 s	3			
• Rated operational current I _e	At 400 V	Α	115	150
·	500 V 690 V	A A	112.6 98.7	138.6 138.6
Rated power for three-phase motors	At 230 V	kW	37	49
at 50 Hz and 60 Hz and	400 V	kW	65	85
	500 V 690 V	kW kW	80 97	98 136
	1 000 V	kW		
Switching frequency with overload relay		h ⁻¹	15	15
Current-carrying capacity with reversing time up to 15 s	3			
 Rated operational current I_e 	At 400 V	A	97	106
	500 V 690 V	A A	97 97	106 106
Rated power for three-phase motors	At 230 V	kW	32	35
at 50 Hz and 60 Hz and	400 V	kW	55	60
	500 V 690 V	kW kW	69 95	75 104
	1 000 V	kW		
Switching frequency with overload relay		h ⁻¹	15	15
Current-carrying capacity with reversing time up to 20 s	6			
 Rated operational current I_e 	At 400 V	A	85	92
	500 V 690 V	A A	85 85	92 92
Rated power for three-phase motors	At 230 V	kW	28	30
at 50 Hz and 60 Hz and	400 V 500 V	kW kW	48 60	52 65
	690 V	kW kW	83	90
	1 000 V	kW		
Switching frequency with overload relay		h ⁻¹	15	15
1) = 1				

¹⁾ For circuit diagrams for the control circuit, see Reference Manual "Switching Devices – Contactors and Contactor Assemblies", http://support.automation.siemens.com/WW/view/en/35554359.

²⁾ For short-circuit protection with overload relay, see the Configuration Manual "Configuring SIRIUS – Selection Data for Fuseless Load Feeders", http://support.automation.siemens.com/WW/view/en/40625241.

³⁾ Up to $I_{\rm k}$ < 0.5 kA; \leq 260 V.




3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA14 contactor assemblies for wye-delta starting

Selection and ordering data

Fully wired and tested contactor assemblies · Size S3-S3-S2 · up to 75 kW

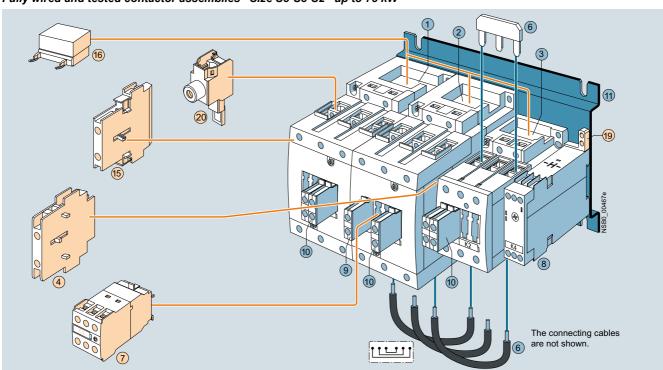

Мо	Mountable accessories (optional)								
To I	be ordered separately	Article No.	Page						
4	Mech. interlock, lateral, depth compensation required Q3: 0 mm; Q2: 27.5 mm ¹⁾	3RA1924-2B	3/172						
715161920	Solid-state time-delay auxiliary switch block, front ²⁾ Auxiliary switch block, lateral Surge suppressor Push-in lug for timing relay screw mounting Single-phase infeed terminals	3RT1926-2G 3RH1921-1EA 3RT19.6-1 3RP1903 3RA1943-3L	3/118 3/116 3/119 3) 3/192						

Complet	te contactor assemblies				
Individu	al parts	Article No Q1	Page		
123 123	Contactor, 55 kW Contactor, 75 kW	3RT1044 3RT1045	3RT1044 3RT1045	3RT1035 3RT1036	3/97 3/98
8 9	Timing relay, lateral Auxiliary switch block with 1 unassigned NO	3RP1574-	1N.30		3)
10	contact Auxiliary switch block for local control	3RH1921-	1CA10		3/114
	2 units 3 units	3RH1921- 3RH1921-			3/114
11 6	Base plate Assembly kit	3RA1942-2 3RA1943-2			3/192 3/192

The assembly kit contains the star jumper on the top and the wiring

mounted onto the side.												
	Rated data AC-3					Rated control	DT	Screw terminals	(1)	PU	PS*	PG
	Operational current I _e up to	Ratings three-p	s of shase m	otors		supply voltage U_s^{-1}				(UNIT, SET, M)		
	0 .	at 50 F	Hz and				Article No.	Price				
	400 V	230 V	400 V	500 V	690 V				per PU			
	Α	kW	kW	kW	kW	V						
	AC operation,	50/60	Hz									
10-12-15-15	115	37	55	81	93	24 AC	В	3RA1444-8XC21-1AC2		1	1 unit	41B
11/14 19						110 AC	В	3RA1444-8XC21-1AG2		1	1 unit	41B
ALC: NO.						230 AC		3RA1444-8XC21-1AL2		1	1 unit	41B
B05	150	47	75	103	110	24 AC	В	3RA1445-8XC21-1AC2		1	1 unit	41B
THE PERSON !						110 AC	В	3RA1445-8XC21-1AG2		1	1 unit	41B
						230 AC		3RA1445-8XC21-1AL2		1	1 unit	41B
L SU	DC operation											
3RA1448XC21-1	115	37	55	81	93	24 DC	В	3RA1444-8XC21-1BB4		1	1 unit	41B
	150	47	75	103	110	24 DC	В	3RA1445-8XC21-1BB4		1	1 unit	41B
1)												

¹⁾ Coil operating range at 50 Hz: 0.8 ... 1.1 x $U_{\rm S}$; at 60 Hz: 0.85 ... 1.1 x $U_{\rm S}$.

¹⁾ Use the 3RA1942-2B base plate for this design.

 $^{^{2)}}$ Generally possible. If a solid-state time-delay auxiliary switch block is mounted onto the front of Q3, an auxiliary switch block can only be mounted onto the side

module on the bottom for connecting the main current paths. 3) See Chapter 10 "Monitoring and Control Devices" → "3RP, 7PV Timing Relays" → "3RP15 Timing Relays in Industrial Enclosure, 22.5 mm".

3RA23, 3RA13, 3RA24, 3RA14 Contactor Assemblies

SIRIUS 3RA14 contactor assemblies for wye-delta starting

Components for customer assembly

	Version	Size	TC	Article No. Price		PS*	PG
				per PU	(UNIT, SET, M)		
Assembly kits							
	The assembly kit contains:	S3-S3-S2	>	3RA1943-2C	1	1 unit	41B
	star jumper, wiring module on the bottom	S3-S3-S3		3RA1943-2B	1	1 unit	41B
	(Wiring module on the top is not included in the	S6-S6-S6 A		3RA1953-2B	1	1 unit	41B
		S6-S6-S6 A S10-S10-S10 A		3RA1953-2N 3RA1963-2B	1	1 unit 1 unit	41B 41B
and the second s	A double infeed between the line contactor and the delta contactor is recommended.)			3RA1973-2B	1	1 unit	41B
4/ 2	t de la companya de						
3RA1953-2B							
3RA1953-2N, 3RA1963-2B, 3RA1973-2B							
Single-phase feede	r terminals						
	Conductor cross-section: 95 mm ²	S3	Д	3RA1943-3L	1	1 unit	41B
I inks for paralleling	g, 3-pole (star jumpers)						
Emilia for parametring	Without connection terminal	S3 >	-	3RT1946-4BA31	1	1 unit	41B
	(the links for paralleling can be reduced by	S6 ¹⁾²⁾		3RT1956-4BA31	1	1 unit	41B
	one pole)	S10, S12 ¹⁾²⁾	-	3RT1966-4BA31			
					1	1 unit	41B
Manual		,			1	1 unit	41B
3RT1936-4BA31		<i>,</i>			1	1 unit	41B
3RT1936-4BA31 Base plates	For austamar accombly of anatostay accomblish	, 				1 unit	41B
	For customer assembly of contactor assemblies for wye-delta starting with a laterally mounted timing relay	,				1 unit	41B
	for wye-delta starting with a laterally mounted	\$3, \$3, \$2		3RA1942-2E	1	1 unit	41B 41B
	for wye-delta starting with a laterally mounted timing relay	S6, S6, S3 S6, S6, S6	3 3	3RA1952-2E 3RA1952-2F	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
	for wye-delta starting with a laterally mounted timing relay Side-by-side mounting	S6, S6, S3	3 3 3	3RA1952-2E	1 1	1 unit 1 unit	41B 41B
	for wye-delta starting with a laterally mounted timing relay Side-by-side mounting	\$6, \$6, \$3 \$6, \$6, \$6 \$10, \$10, \$6 \$10, \$10, \$10 \$12, \$12, \$10	B B B B	3RA1952-2E 3RA1952-2F 3RA1962-2E	1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B
	for wye-delta starting with a laterally mounted timing relay Side-by-side mounting	\$6, \$6, \$3 \$6, \$6, \$6 \$10, \$10, \$6 \$10, \$10, \$10 \$12, \$12, \$10	B B B B	3RA1952-2E 3RA1952-2F 3RA1962-2E 3RA1962-2F 3RA1972-2E	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B 41B
	for wye-delta starting with a laterally mounted timing relay Side-by-side mounting 10 mm distance between Q1, Q3 and Q2 For customer assembly of contactor assemblies for wye-delta starting with a front-mounted timing	\$6, \$6, \$3 \$6, \$6, \$6 \$10, \$10, \$6 \$10, \$10, \$10 \$12, \$12, \$10	8 8 8 8 8	3RA1952-2E 3RA1952-2F 3RA1962-2E 3RA1962-2F 3RA1972-2E	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B 41B 41B

 $^{^{1)}\,}$ The 3RT1956-4EA1 (for S6) or 3RT1966-4EA1 (for S10 and S12) cover can be used for touch protection.

²⁾ Sizes S6 and S10/S12 are approved as star jumpers according to UL and CSA.

Introduction

Overview

The function modules for mounting onto contactors enable the assembly of starters and contactor assemblies for direct-on-line, reversing and wye-delta starting without any additional, complicated wiring of the individual components.

They include the key control functions required for the particular feeder, e.g. timing and interlocking, and can be connected to the control system by either parallel wiring or through IO-Link or AS-Interface.

Version	SIRIUS 3RA28 function modules	SIRIUS 3RA27 function modules for IO-Link ¹⁾	SIRIUS 3RA27 function modules for AS-Interface 1)
For direct-on-line starting	Timing relays: ON-delay or OFF-delay with semiconductor output With screw or spring-type terminals	With screw or spring-type terminals	With screw or spring-type terminals
	105	A STATE OF THE STA	<u> </u>
For reversing starting	Wiring modules for size S00 to S2 contactors With screw or spring-type terminals (with screw terminals for main and control circuit)	1 function module for size S00 to S2 contactors with screw or spring-type terminals plus the respective wiring modules ¹⁾	1 function module for size S00 to S2 contactors with screw or spring-type term nals plus the respective wiring modules 1.
	HILL TIP	The same	turn turn
For wye-delta starting	1 function module for size S00 to S2 contactors with screw or spring-type terminals plus the respective wiring modules ²⁾	1 function module for size S00 to S2 contactors with screw or spring-type terminals plus the respective wiring modules ²⁾	1 function module for size S00 to S2 contactors with screw or spring-type term nals plus the respective wiring modules ² .
	= = 1	interior in the second	tutte
Accessories	Sealable covers	Operator panel for autonomous control of up to four feeders Module connector for the grouping of starters	AS-Interface addressing unit 3RK1904-2AB02 (see Chapter 2, "Industrial Communication") Sealable covers
		Connection cable between the operator panel and the feeder group Sealable covers	Conable

¹⁾ Use of the communication-capable function modules for IO-Link or AS-Interface requires contactors with voltage tap-off; see pages 3/43 and 3/46.

²⁾ The modules for the control current wiring, which are included in the wiring kit, are not required.

SIRIUS 3RA28 Function Modules for Mounting on 3RT2 and 3RH21 Contactors

Introduction

Overview

Simply by being plugged in place, the SIRIUS function modules enable different functionalities required for the assembly of starters to be realized in the feeder. The function modules and wiring kits thus help to reduce the wiring work within the feeder practically to zero.

SIRIUS function modules for direct-on-line starting

The electronic timing relays which can be mounted onto the contactor are available in these versions:

- Sizes S00 and S0 for applications in the range from 24 to 240 V AC/DC (wide voltage range)
- Size S2 for applications in either the range from 24 to 90 V AC/DC or 90 to 240 V AC/DC

Both the electrical and mechanical connection are made by simple snapping on and locking.

A protection circuit (varistor) is integrated in each module.

The electronic timing relay with semiconductor output uses two contact legs to actuate the contactor underneath by means of a semiconductor after the set time t has elapsed.

The switching state feedback is performed by a mechanical switching state indicator (plunger). In addition, the auxiliary switches in the contactors are freely accessible and can be used for feedbacks to the control system or for signal lamps.

A sealable cover is available to protect against careless adjustment of the set times.

SIRIUS function modules for reversing starting

The wiring kits for reversing starters enable the cost-effective assembly of contactor assemblies. They can be used for all applications with reversing duty up to 37 kW.

For detailed description, see page 3/160

SIRIUS function modules for wye-delta starting

Both interlocking and timing functions are required for the assembly of wye-delta starters. With the function modules for wye-delta starting and the matching link modules for the main circuit, these starters can be assembled easily and with absolutely no errors.

The entire sequence in the control circuit is integrated in the snap-on modules. This covers:

- An adjustable star time t from 0.5 to 60 s
- · A non-adjustable dead interval of 50 ms
- Electrical contacting to the contactors by means of coil pick-off (contact legs)
- Feedback of the switching state at the contactor using a mechanical switch position indicator (plunger)
- Electrical interlocking between the contactors

These modules do not require their own terminals and can therefore be used for contactors with both screw and spring-type terminals in all the sizes S00 to S2. To start the wye-delta starter, only the first of the three contactors (line contactor) is actuated. All other functions then take place inside the individual modules.

This also offers advantages if the timing function was previously implemented in a controller, as it again results in a significant reduction in the number of PLC outputs, the programming work and the wiring outlay.

The kits for the main circuit include the mechanical interlock, the star jumper, the wiring modules at the top and at the bottom, and the required connecting clips.

A protection circuit (varistor) is integrated in the basic module.

Application

The snap-on function modules for direct-on-line starting are used above all for realizing timing functions independently of the control system.

With the OFF-delay variant of the timing relay it is possible for example for the fan motor for cooling a main drive to be switched off with a delay so that sufficient cooling after operation is guaranteed even if the plant and its control system have already been switched off.

The ON-delay timing relays enable for example the time-delayed starting of several drives so that the summation starting current does not rise too high, which could result in voltage failure.

The <u>function modules for wye-delta starting</u> are mostly used where current-limiting measures for starting a drive are required, e.g. for large fans and ventilators, and a high level of availability is essential at the same time. This technology has been used with success for several decades and has the additional advantage of requiring relatively little know-how. Through the use of function modules, the assembly work with simple standard components is even easier and error-free.

Benefits

The use of snap-on function modules for direct-on-line starting (timing relays) results in the following advantages:

- · Reduction of control current wiring
- Prevention of wiring errors
- Reduction of testing costs
- Implementation of timing functions independently of the control system
- Less space required in the control cabinet compared to a separate timing relay
- No additive protection circuit required (varistor integrated)

For advantages of using wiring kits for the assembly of reversing starters, see page 3/161.

The use of <u>function modules for wye-delta starting</u> results in the following advantages:

- Operation solely through the line contactor A1/A2 no further wiring needed
- Reduction of the control current wiring inside the contactor assembly and to the higher-level control system where applicable
- Prevention of wiring errors
- Reduction of testing costs
- Integrated electrical interlocking saves costs and prevents errors
- Less space needed in the control cabinet compared to using a separate timing relay
- Adjustable starting in star mode from 0.5 to 60 s
- Independent of the contactor's control supply voltage (24 to 240 V AC/DC)
- Varistor integrated no additive protection circuit required
- No control current wiring thanks to plug-in technology and connecting cables
- Mechanically coded assembly enables easy configuration and reliable wiring
- Fewer versions one module kit for screw and spring-type connection and for all the contactor sizes S00 to S2
- Mechanical interlocking (with wiring kit for the main circuit)



SIRIUS 3RA28 Function Modules for Mounting on 3RT2 and 3RH21 Contactors

Introduction

Technical specifications						
T		2D 4 2044	2D 4 0004	20 4 20 4 2	2D 4 0020	2D 4 004 C
Type		3RA2811	3RA2831	3RA2812	3RA2832	3RA2816
Can be used for size		S00, S0	S2	S00, S0	S2	S00, S0, S2
Function		ON-delay		OFF-delay with contro	signal	Wye-delta function
Dimensions		See 3RT20 c	contactors, pag	ges 3/19 and 3,	_	
General data						
Rated insulation voltage U _i	V AC	300				
Pollution degree 3						
Overvoltage category III						
Rated impulse withstand voltage U _{imp}	kV AC	4				
Operating range of excitation		0.85 1.1 x 0.95 1.05	$U_{\rm s}$, times the rated	d frequency		
Overvoltage protection		Varistor integ	grated			
Rated power	W	1				1
 Power consumption at 230 V AC, 50 Hz 	VA	1				2
DIAZED protection Operational class gG	Α					4
Switching frequency for load						
 With I_e at 230 V AC 	h ⁻¹	2 500				
With 3RT2 contactor at 230 V AC	h ⁻¹	2 500				
Recovery time	ms	50				150
Minimum ON period	ms			35		
Residual current Max.	mA	5				
Voltage drop Max. With conducting output	VA	3.5				
Setting accuracy Typ. With reference to upper limit of scale		±15 %				
Repeat accuracy Max.		±1 %				
Electrical endurance						
0	erating cycles					
	erating cycles					100 000
	erating cycles	100 x 10 ⁶				10 x 10 ⁶
Permissible ambient temperature		05 00				
During operation	°C	-25 +60				
During storage Page of protection and to IEC 00047.1. Appendix C.	- U	-40 +80				
Degree of protection acc. to IEC 60947-1, Appendix C Shock resistance	<i>g</i> /ms	IP20 15/11				
Half-sine acc. to IEC 60068-2-27	9,	10,11				
Vibration resistance According to IEC 60068-2-6	Hz/mm	10 55/0.35	5			
Electromagnetic compatibility (EMC)				-6-4, IEC 61812	2-1, IEC 60947	-4-1
Overvoltage protection		Varistor integ	grated			
Permissible mounting position		Any (see cor	ntactor)			
Conductor cross-sections						
Connection type (1 or 2 conductors can be connected)		Screw	terminals			
• Solid	mm ²	1 x (0.5 4)	, 2 x (0.5 2.	5)		
 Finely stranded with end sleeve 	mm^2		5), 2 x (0.5			
 AWG cables, solid or stranded 	AWG	2 x (20 14	,			
Terminal screws Tightening torque	Nm	M3 (for stand 0.8 1.2	dard screw dri	ver size 2 or Po	zidriv 2)	
Connection type (1 or 2 conductors can be connected)			-type termina	Is		
Operating devices	mm	3.0 x 0.5				
• Solid	mm ²	2 x (0.25	1.5)			
Finely stranded with end sleeve	mm^2	2 x (0.25				
Finely stranded	mm^2	2 x (0.25				
AWG cables, solid or stranded	AWG	2 x (24 16				

SIRIUS 3RA28 Function Modules for Mounting on 3RT2 and 3RH21 Contactors

For direct-on-line starting

Selection and ordering data

 $\begin{array}{ll} PU \text{ (UNIT, SET, M)} = 1 \\ PS^* & = 1 \text{ unit} \\ PG & = 41B \end{array}$





3RA2811-1CW10

3RA2811-2CW10

For contactors	Rated control supply voltage $U_s^{1)}$	Time setting range t	DT	Screw terminals	1	DT	Spring-type terminals	$\stackrel{\circ}{\square}$
Туре	V AC/DC	S		Article No.	Price per PU		Article No.	Price per PU
	ming relays with semiconduc g onto the front	ctor output,						
	The electrical connection between contactor underneath is established snapped on and locked.							
	ON-delay Two-wire design, varistor integrate	ed						
3RT201., 3RT202., 3RH21 ²⁾ , 3RH24	24 240	0.05100 (1, 10, 100; selectable)	Α	3RA2811-1CW10		Α	3RA2811-2CW10	
3RT203.	24 90	0.05100	Α	3RA2831-1DG10		Α	3RA2831-2DG10	
	90 240	(1, 10, 100; selectable)	Α	3RA2831-1DH10		Α	3RA2831-2DH10	
	OFF-delay with control signal Varistor integrated							
3RT201., 3RT202., 3RH21 ²⁾ , 3RH24	24 240	0.05100 (1, 10, 100; selectable)	Α	3RA2812-1DW10		Α	3RA2812-2DW10	
3RT203.	24 90	0.05100	Α	3RA2832-1DG10		Α	3RA2832-2DG10	
	90 240	(1, 10, 100; selectable)	Α	3RA2832-1DH10		Α	3RA2832-2DH10	
Accessories	;							
	Sealable covers for 3RA27, 3RA28, 3RA29		Α	3RA2910-0		Α	3RA2910-0	

 $^{^{\}rm 1)}\,$ AC voltage values apply for 50 Hz and 60 Hz.

For manuals, see

http://support.automation.siemens.com/WW/view/de/60279150

Function	Function charts	
	ZZZ Timing relay energized	
	Contact closed	
	Contact open	
1 NO contact (semicond	uctor output)	
ON-delay	3RA2811CW10	3RA2831D.10
	3RA28 W ***********************************	3RA28 () () () () () () () () () (
OFF-delay with control signal	3RA2812DW10 A3/A4 B1/A4 → ≥ 35 ms → 08 Q	3RA2832D.10 A3/A4 //////////////////////////////////

²⁾ Cannot be fitted onto coupling relays.

SIRIUS 3RA28 Function Modules for Mounting on 3RT2 and 3RH21 Contactors

For reversing starting / for wye-delta starting

Selection and ordering data

PU (UNIT, SET, M) = 1 PS* = 1 PG = 4 = 1 unit = 41B







3RA2

2923-2AA1	3RA2923-2BE

Article No. Price Article No. Pr	011/12010 01	.**20			011/12020 2/1/11			011/12020 2002	
Type V AC/DC s Assembly kits for reversing starting Assembly kits for making 3-pole contactor assemblies The assembly kit contains: Mechanical interlock, 2 connecting clips for 2 contactors, wring modules on the top and bottom 3RT201. • For size S0 • For size S2 (only for main circuit for version with spring-type assembly kits for wye-delta starting Assembly kits for wye-delta starting Assembly kits for making 3-pole contactor assemblies The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactors; star jumper, wring modules on the top and bottom 3RT201. • For size S0 (only for main circuit for version with spring-type assembly kits for wye-delta starting) ASSEMBLY kits for wye-delta starting ASSEMBLY kits for wye-delta starting ASSEMBLY kits for wye-delta starting RT201. • For size S0 (only for main circuit for version with spring-type terminals) The decortical connection between the function module and the contactor assembly is established automatically by snapping on and plugging in the connection between the function module and the contactor assembly is established automatically by snapping on and plugging in the connection cables. Wye-delta function (varistor integrated) ACCESSORIES Sealable covers A 3RA2910-0 A 3RA2910-0 A 3RA2910-0		Rated control supply voltage $U_s^{1)}$	Time setting range t	DT	Screw terminals		DT		<u></u>
Assembly kits for making 3-pole contactor assemblies The assembly kit contains: Mechanical interlock, 2 connecting clips for 2 contactors, wiring modules on the top and bottom 3RT201. • For size S0 • For size S0 • For size S2 (only for main circuit for version with spring-type terminals) Assembly kits for making 3-pole contactor assemblies The assembly kits for wye-delta starting Assembly kits for wye-delta starting Assembly kits for making 3-pole contactor assemblies The assembly kits for making 3-pole contactor assemblies The assembly kits for making 3-pole contactor assemblies The assembly kits for making 3-pole contactor; star jumper, wiring modules on the top and bottom 3RT201. • For size S0 • For size S0	Type	V AC/DC	e		Article No.			Article No.	Price per PU
Assembly kits for making 3-pole contactor assemblies The assembly kit contains: Mechanical interlock, 2 connecting clips for 2 contactors, wiring modules on the top and bottom 3RT201. • For size S00			3			pcrro			рсгто
wiring modules on the top and bottom 3RT201. • For size S00	riccombi	Assembly kits for making 3-pole The assembly kit contains: Mechanical interlock,							
3RT202. • For size S0 3RA2923-2AA1									
### STR203. For size \$2 (only for main circuit for version with spring-type terminals) ### Assembly kits for wye-delta starting ### Assembly kits for making 3-pole contactor assemblies The assembly kit contains: ### Mechanical interlock, ### 4 connecting clips for 3 contactors; ### star jumper, ### wiring modules on the top and bottom ### 3RA2913-2BB1	3RT201.	• For size S00		\blacktriangleright	3RA2913-2AA1		▶	3RA2913-2AA2	
Assembly kits for wye-delta starting Assembly kits for making 3-pole contactor assemblies The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactors; star jumper, wiring modules on the top and bottom 3RT201. • For size S00	3RT202.	• For size S0		•	3RA2923-2AA1			3RA2923-2AA2	
Assembly kits for making 3-pole contactor assemblies The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactors; star jumper, wiring modules on the top and bottom 3RT201. • For size S00	3RT203.		for version with spring-type	•	3RA2933-2AA1		В	3RA2933-2AA2	
The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactors; star jumper, wiring modules on the top and bottom 3RT201. • For size S00	Assembly	kits for wye-delta starting							
3RT202. • For size S0 (only for main circuit for version with spring-type terminals) 3RT203. • For size S2 (only for main circuit for version with spring-type terminals) Function modules for wye-delta starting The electrical connection between the function module and the contactor assembly is established automatically by snapping on and plugging in the connecting cables. Wye-delta function (varistor integrated) 3RT201., 24 240 0.5 60 A 3RA2816-0EW20 3RT202., 3RT203.²) Accessories Sealable covers A 3RA2910-0 A 3RA2910-0		The assembly kit contains: Mechanical interlock, 4 connecting clips for 3 contactor star jumper,	s;						
terminals) 3RT203. • For size S2 (only for main circuit for version with spring-type terminals) Function modules for wye-delta starting The electrical connection between the function module and the contactor assembly is established automatically by snapping on and plugging in the connecting cables. Wye-delta function (varistor integrated) 3RT201., 24 240	3RT201.	• For size S00			3RA2913-2BB1		▶	3RA2913-2BB2	
terminals) Function modules for wye-delta starting The electrical connection between the function module and the contactor assembly is established automatically by snapping on and plugging in the connecting cables. Wye-delta function (varistor integrated) 3RT201., 24 240	3RT202.		for version with spring-type	•	3RA2923-2BB1		>	3RA2923-2BB2	
The electrical connection between the function module and the contactor assembly is established automatically by snapping on and plugging in the connecting cables. Wye-delta function (varistor integrated) 3RT201., 24 240 0.5 60 A 3RT202. (10, 30, 60; selectable) 3RT203. (2) (10, 30, 60; selectable) Accessories Sealable covers A 3RA2910-0 A 3RA2910-0	3RT203.		for version with spring-type	•	3RA2933-2BB1		В	3RA2933-2BB2	
contactor assembly is established automatically by snapping on and plugging in the connecting cables. Wye-delta function (varistor integrated) 3RT201., 24 240 0.5 60 A 3RT202., 3RT203. ²) Accessories Sealable covers A 3RA2910-0 A 3RA2910-0 A 3RA2910-0	Function i	modules for wye-delta starting]						
3RT201., 24 240		contactor assembly is established	l automatically by snapping on and						
3RT202 3RT203. ²) (10, 30, 60; selectable) Accessories Sealable covers A 3RA2910-0 A 3RA2910-0		Wye-delta function (varistor integ	grated)						
Sealable covers A 3RA2910-0 A 3RA2910-0		24 240		Α	3RA2816-0EW20		А	3RA2816-0EW20	
	Accessori	es							
				А	3RA2910-0		Α	3RA2910-0	

 $^{^{\}rm 1)}$ AC voltage values apply for 50 Hz and 60 Hz.

For manuals, see

http://support.automation.siemens.com/WW/view/en/60279150.

Function	Function charts
	Timing relay energized
	Contact closed
	Contact open
2 NO contacts (interconnecte	ed internally)
Wye-delta function	3RA2816-0EW20
1 NO contact delayed	A1/A2 Q1
 1 NO contact instantaneous 	Y Q2
1 NO contact instantaneous	Y Q2

²⁾ Cannot be fitted onto coupling relays.

SIRIUS 3RA27 Function Modules for IO-Link for Mounting on 3RT2 Contactors

Introduction

Overview

The SIRIUS function modules for IO-Link enable the assembly of starters and contactor assemblies for direct-on-line, reversing and wye-delta starting without any additional, complicated wiring of the individual components. They include the key control functions required for the particular feeder, e.g. timing and interlocking.


The electrical and mechanical connection to the contactor is established by snapping on and locking. An additive protection circuit for the individual contactors can be dispensed with completely because a varistor is integrated in the modules. Feedback from the contactor contacts is performed with Hall sensors which provide reliable feedback concerning the switching state even under extremely dusty conditions.

The starters are connected to the higher-level control system through IO-Link, with the possibility of connecting up to four starters as a group to one port of the IO-Link master.

Through this type of connection to the control system, a maximum of wiring is saved.


The following essential signals are transmitted:

- Availability of the feeder in response to an indirect inquiry from the motor starter protector/circuit breaker
- · Starter control
- Feedback concerning the switching state of the starter

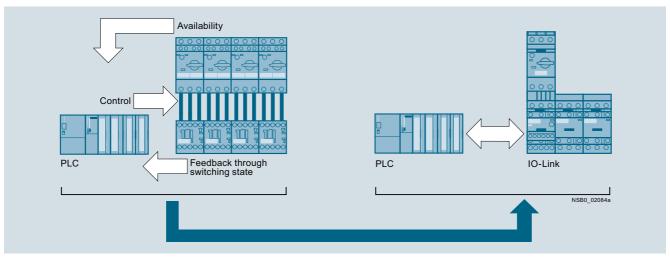

Signal transmission through IO-Link

The inquiry from the motor starter protector/circuit breaker does not take place through additive wiring between the auxiliary switch and the module but by means of a voltage inquiry at the contactor input. This requires special versions of the contactors with voltage tap-off (see pages 3/43 and 3/46).

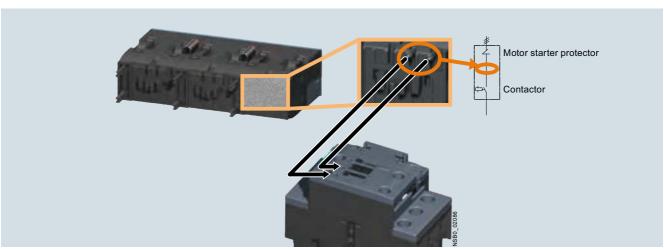


Availability signal through voltage tap-off

SIRIUS 3RA27 Function Modules for IO-Link for Mounting on 3RT2 Contactors

Introduction

By grouping up to four starters it is possible to connect up to 16 starters to one master of the ET 200S. In this case all the signals of the individual controls are made available directly in the process image of the input through only three individual

wires per starter group. If the same potential is present at the ET 200S master and at the switching devices, the wiring can be reduced further by connecting the supply voltage of the contactor coils to the communication wires via jumpers.

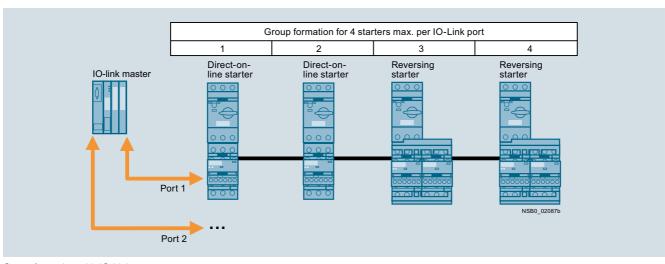

Group formation with IO-Link

In case of a malfunction, the corresponding error signals are also sent directly to the PLC in acyclic mode. This is in addition to transmission of the switching signals and status signals.

Possible error signals:

- · Switching element defective
- No main voltage (motor starter protector tripped)
- No control supply voltage
- · Limit position on the right / on the left
- Manual mode
- · Process image fault

This easy integration of the starters in the TIA world does not limit the flexibility in the field in the least. For example, all function modules have special terminals in order to enable direct local disconnection. These terminals can be connected for example to a position switch. The input interrupts the voltage supply to the contactor coil directly, i.e. without going through the PLC. These terminals are jumpered in the as-delivered state.

Local manual operation of the complete starter group is also straight-forward using a hand-held device. The latter is easily connected to the last starter and can be built into the front panel of the control cabinet if required. This offers significant advantages particularly for commissioning.

Application

The use of SIRIUS function modules with IO-Link is recommended above all in machines and plants in which there are several motor feeders in one control cabinet. Using IO-Link, the connection of these feeders to the automation level is easy, quick and error-free. And with IO modules no longer needed, the width of the PLC is far smaller.

Benefits

- Reduction of the control current wiring to no more than three cables for four feeders
- Elimination of testing costs and wiring errors
- Reduction of configuration work
- Integration in TIA means clear diagnostics if a fault occurs
- Dispensing with IO modules saves space in the control cabinet
- All essential timing and interlocking functions for reversing duty and wye-delta starting are integrated
- No additive protection circuit required

For further information on the IO-Link, see Chapter 2 "Industrial Communication".

SIRIUS 3RA27 Function Modules for IO-Link for Mounting on 3RT2 Contactors

Introduction

Technical specifications			
Туре			3RA2711
Dimensions			See 3RT20 contactors, pages 3/19 and 3/24
General data			
Suitable for IO-Link masters acc. to spec	cification		1.1
Permissible ambient temperature			
During operation	According to IEC 60947-1	°C	-25 +60
During storage	According to IEC 60721-3-1	°C	-40 +80
 During transport 	According to IEC 60721-3-2	°C	-40 +80
Degree of protection			IP20
Operational voltage U _{Hi}		V DC	24 ± 20 %
Max. length of the cables for the input Y1–Y2	According to EN 50295	m	30
Electromagnetic compatibility (EMC)			IEC 61000-6-2, IEC 61000-6-4, IEC 60947-4-1
Conductor cross-sections			
Connection type (1 or 2 conductors can be connected)			Screw terminals
• Solid		mm ²	1 x (0.5 4), 2 x (0.5 2.5)
 Finely stranded with end sleeve 		mm^2	1 x (0.5 2.5), 2 x (0.5 1.5)
AWG cables		AWG	2 x (20 14)
 Terminal screws 			M3 (for standard screwdriver Ø 6 mm or Pozidriv 2)
Tightening torque of the terminal screws		Nm	0.8 1.2
Connection type (1 or 2 conductors can be connected)			Spring-type terminals
Operating devices		mm	3.0 x 0.5
• Solid		mm^2	2 x (0.25 1.5)
 Finely stranded with end sleeve 		mm^2	2 x (0.25 1.5)
Finely stranded		mm^2	2 x (0.25 1.5)
 AWG cables 		AWG	2 x (24 16)

SIRIUS 3RA27 Function Modules for IO-Link for Mounting on 3RT2 Contactors

For direct-on-line starting / for reversing starting / for wye-delta starting

Selection and ordering data

 $\begin{array}{ll} PU \text{ (UNIT, SET, M)} = 1 \\ PS^* & = 1 \text{ unit} \\ PG & = 41B \end{array}$

	Version	DT	Screw terminals			Spring-type terminals	$\stackrel{\infty}{\sqcup}$
			Article No.	Price per PU		Article No.	Price per PU
unction modules for	direct-on-line starting						
	IO-Link connection Includes one module connector for assembling	Α	3RA2711-1AA00		Α	3RA2711-2AA00	

3RA2711-1AA00



3RA2711-2AA00

Function modules for reversing starting¹⁾

an IO-Link group



IO-Link connection, comprising one basic and one coupling module and an additional module connector for assembling an IO-Link group

3RA2711-1BA00

3RA2913-2AA1

3RA2923-2AA1

3RA2933-2AA1

3RA2711-2BA00

3RA2913-2AA2

3RA2923-2AA2

B 3RA2933-2AA2

3RA2711-1BA00



3RA2711-2BA00



3RA2923-2AA1



The assembly kit contains: mechanical interlock, 2 connecting clips for two contactors,

• For size S00

For size S0For main, auxiliary and control circuits

- Only for main circuit²⁾

• For size S2 NEW

- For main, auxiliary and control circuits

- Only for main circuit²⁾

Matching contactors with voltage tap-off required; see pages 3/43 and 3/46.

1) For prewired contactor assemblies for reversing starting with voltage tap-off, see pages 3/163 and 3/165. When these contactor assemblies are used, the assembly kit for the wiring is already integrated.

2) Version in sizes S0 and S2 with spring-type terminals: Only the wiring modules for the main circuit are included. No connectors are included for the auxiliary and control circuit. For matching IO-Link masters, see Chapter 2 "Industrial Communication".

Assembly kits for making 3-pole contactor assemblies

SIRIUS 3RA27 Function Modules for IO-Link for Mounting on 3RT2 Contactors

For direct-on-line starting / for reversing starting / for wye-delta starting

	Version	DT	Screw terminals	⊕		Spring-type terminals	$\stackrel{\circ}{\mathbb{H}}$
			Article No.	Price per PU		Article No.	Price per PU
Function modules for	r wye-delta starting ¹⁾						
min -	IO-Link connection, comprising one basic module and two coupling modules, plus an additional module connector for assembling an IO-Link group	А	3RA2711-1CA00	,	A	3RA2711-2CA00	
3RA2711-1CA00							
117717 117717 117717 117717	Assembly kits for making 3-pole contactor assemblies ²⁾ The assembly kit contains: mechanical interlock, 4 connecting clips for 3 contactors; star jumper, wiring modules on the top and bottom						
3RA2923-2BB1	• For size S00	>	3RA2913-2BB1		>	3RA2913-2BB2	
FEFE FEE	 For size S0 For main, auxiliary and control circuits Only for main circuit³⁾ 	•	3RA2923-2BB1 		•	 3RA2923-2BB2	
3RA2923-2BB2	For size S2 NEW For main, auxiliary and control circuits Only for main circuit ³⁾	•	3RA2933-2BB1 		В	 3RA2933-2BB2	
1) For complete contactor function modules, see p	assemblies for wye-delta starting including pages 3/180 and 3/182.		ning contactors wit	h voltage	tap	o-off required; see	pages

- 2) When using the function modules for wye-delta starting, the wiring modules for the auxiliary current are not required.
- 3) Version in sizes S0 and S2 with spring-type terminals: Only the wiring modules for the main circuit are included. No connectors are included for the auxiliary and control circuit.

3/43 and 3/46.

For matching IO-Link masters, see Chapter 2 "Industrial Communication".

	Version	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Accessories							
	Module connector set, comprising: • 2 module connectors, 14-pole, short • 2 interface covers	4 A	3RA2711-0EE10		1	1 unit	41B
100	Module connectors						
3RA2711-0EE10	• 14-pole, 9 cm For size jump + 1 space	A	3RA2711-0EE06		1	1 unit	41B
	14-pole, 26 cm For various space combinations	A	3RA2711-0EE07		1	1 unit	41B
3RA2711-0EE06	• 14-pole, 33.5 cm For various space combinations	A	3RA2711-0EE08		1	1 unit	41B
	10-pole, 9 cm For separate control signal infeed within an IO-Link group	4 A	3RA2711-0EE16		1	1 unit	41B
3RA2711-0EE15	Interface covers (Set of 5)	4 A	3RA2711-0EE15		1	1 unit	41B
E9-1	Sealable covers For 3RA27, 3RA28, 3RA29	Α	3RA2910-0		1	5 units	41B
3RA2910-0							
Operator panels ¹⁾							
E	Operator panel (set), comprising: 1 x operator panel 1 x enabling module 1 x interface cover 1 x fixing terminal	А	3RA6935-0A		1	1 unit	42F
3RA6935-0A							
ß-	Connection cable, length 2 m, 10- to 14-pole	Α	3RA2711-0EE11		1	1 unit	41B
3RA2711-0EE11	For connecting the operator panel to the communicatio module	n 					
	Enabling modules (replacement)	Α	3RA6936-0A		1	1 unit	42F
	Interface covers (replacement)	Α	3RA6936-0B		1	5 units	42F

¹⁾ Suitable only for communication through IO-Link.

For manuals, see

http://support.automation.siemens.com/WW/view/en/39319600.

SIRIUS 3RA27 Function Modules for AS-Interface for Mounting on 3RT2 Contactors

Introduction

Overview

The SIRIUS function modules for AS-Interface enable the assembly of starters and contactor assemblies for direct-on-line, reversing and wye-delta starting without any additional, complicated wiring of the individual components. They include the key control functions required for the particular feeder, e.g. timing and interlocking.

The electrical and mechanical connection to the contactor is established by snapping on and locking. An additive protection circuit for the individual contactors can be dispensed with completely because a varistor is integrated in the modules. Feedback from the contactor contacts is performed with Hall sensors which provide reliable feedback concerning the switching state even under extremely dusty conditions.


Connection of the starters to the higher-level control system takes place with AS-Interface Specification V2.1 and higher in

A/B technology. As the result, up to 62 starters can be connected to one master and the address is entered in normal manner with an addressing unit.

Through this type of connection to the control system, a maximum of wiring is saved. The wiring outlay is reduced to the control supply voltage and the two individual wires for AS-Interface.

The following essential signals are transmitted:


- Availability of the feeder in response to an indirect inquiry from the motor starter protector/circuit breaker
- Starter control
- Feedback concerning the switching state of the starter

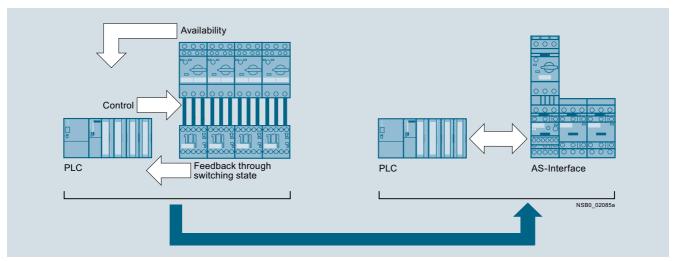

Signal transmission through AS-Interface

The inquiry from the motor starter protector/circuit breaker does not take place through additive wiring between the auxiliary switch and the module but by means of a voltage inquiry at the contactor input.


This requires special versions of the contactors with voltage tap-off (see pages 3/43 and 3/46).

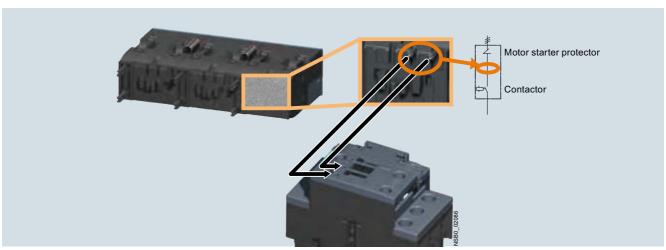

Availability signal through voltage tap-off

SIRIUS 3RA27 Function Modules for AS-Interface for Mounting on 3RT2 Contactors

Introduction

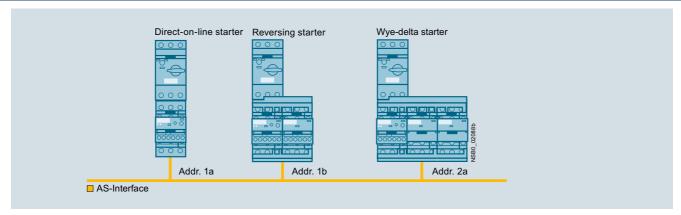

Topology with AS-Interface

This easy integration of the starters in the TIA world does not limit the flexibility in the field in the least. For example, all function modules have special terminals in order to enable direct local disconnection. These terminals can be connected for example

to a position switch. The input interrupts the voltage supply to the contactor coil directly, i.e. without going through the PLC. These terminals are jumpered in the as-delivered state.

Application

The use of SIRIUS function modules with AS-Interface is recommended above all in machines and plants requiring easy connection of several different sensors and actuators both inside and outside the control cabinet to the higher-level control system. And with IO modules no longer needed, the width of the PLC is far smaller.

Benefits

- · Reduction of control current wiring
- Elimination of testing costs and wiring errors
- Reduction of configuration work
- Dispensing with IO modules saves space in the control cabinet
- All essential timing and interlocking functions for reversing duty and wye-delta starting are integrated
- No additive protection circuit required



SIRIUS 3RA27 Function Modules for AS-Interface for Mounting on 3RT2 Contactors

Introduction

Technical specifications			
Туре			3RA2712
Dimensions			See 3RT20 contactors, pages 3/19 and 3/24
General data			
Slave type			A/B slave
Suitable for AS-i masters acc. to Sp	ec.		2.1 or higher
AS-i Slave Profile IO.ID.ID2			7.A.E
ID1 Code (factory setting)			7
Permissible ambient temperature			
 During operation 	According to IEC 60947-1	°C	-25 +60
During storage	According to IEC 60721-3-1	°C	-40 +80
During transport	According to IEC 60721-3-2		-40 +80
Degree of protection			IP20
Operational voltage			
AS-Interface		V	26.5 31.6
AUX PWR 24 V DC		V	24 ± 20 %
Power consumption, max.			
AS-Interface		mA	30
AUX PWR			
- Maximum pick-up/hold current	Size S00	mA	200/200
	Size S0 Size S2	mA mA	300/300 1300/50
Max. length of the cables	According to EN 50295	m	30
for the input Y1-Y2			
Electromagnetic compatibility (EMC	5)		IEC 61000-6-2, IEC 61000-6-4, IEC 60947-4-1
Conductor cross-sections			
Connection type (1 or 2 conductors can be connected))		Screw terminals
• Solid		mm ²	1 x (0.5 4), 2 x (0.5 2.5)
 Finely stranded with end sleeve 		mm^2	1 x (0.5 2.5), 2 x (0.5 1.5)
 AWG cables 		AWG	2 x (20 14)
Terminal screws			M3 (for standard screwdriver Ø 6 mm or Pozidriv 2)
Tightening torque of the terminal scr	rews	Nm	0.8 1.2
Connection type (1 or 2 conductors can be connected)	1		Spring-type terminals
Operating devices		mm	3.0 x 0.5
• Solid		mm ²	2 x (0.25 1.5)
 Finely stranded with end sleeve 		mm ²	2 x (0.25 1.5)
Finely stranded		mm ²	2 x (0.25 1.5)
AWG cables		AWG	2 x (24 16)

SIRIUS 3RA27 Function Modules for AS-Interface for Mounting on 3RT2 Contactors

For direct-on-line starting / for reversing starting / for wye-delta starting

Selection and ordering data

PU (UNIT, SET, M) = 1 PS* = 1 unit PG = 41B

Version DT Screw terminals		41B						
AS-Interface connection Comprising one basic and one coupling module AS-Interface connection Comprising one basic and one coupling module AS-Interface connection Comprising one basic and one coupling module AS-Interface connection Comprising one basic and one coupling module AS-Interface connection AS-Interface connection Comprising one basic and one coupling module AS-Interface connection AS-Interface con		Version	DT	Screw terminals	(1)	DT	Spring-type terminals	<u></u>
AS-Interface connection AS-Interface connection AS-Interface connection AS-Interface connection AS-Interface connection Comprising one basic and one coupling module AS-Interface connection Comprising one basic and one coupling module AS-Interface connection Comprising one basic and one coupling module AS-Interface connection Comprising one basic and one coupling module AS-Interface connection AS-Interface connection Comprising one basic and one coupling module AS-Interface connection AS-Interface connection Comprising one basic and one coupling module AS-Interface connection A 3RA2712-1BA00 A 3RA2712-1BA00 A 3RA2712-1BA00 A 3RA2712-1BA00 A 3RA2712-1BA00 A 3RA2712-2BA00 A 3RA2712-1BA00				Article No.			Article No.	
3RA2712-2AA00 Function modules for reversing starting AS-Interface connection, comprising one basic and one coupling module AS-Interface connection, comprising one basic and one coupling module A 3RA2712-1BA00 AS-RA2712-1BA00 A 3RA2712-1BA00 A 3RA2712-2BA00 A 3RA2712-1BA00 A 3RA2712-1B	Function modules t	or direct-on-line starting						
AS-Interface connection, comprising one basic and one coupling module AS-Interface connection, comprising one basic and one coupling module AS-Interface connection, comprising one basic and one coupling module AS-Interface connection, comprising one basic and one coupling module AS-Interface connection, comprising one basic and one coupling module AS-Interface connection, comprising one basic and one coupling module AS-Interface connection, and assembly kits for making 3-pole contactor assemblies The assembly kits for making	3RA2712-1AA00	AS-Interface connection	А	3RA2712-1AA00		А	3RA2712-2AA00	
AS-Interface connection, comprising one basic and one coupling module AS-Interface connection, comprising one basic and one coupling module ASA2712-1BA00 Assembly kits for making 3-pole contactor assemblies The assembly kit contains: mechanical interlock, 2 connecting clips for two contactors, wiring modules on the top and bottom 3RA2923-2AA1 • For size SO • For size SO • For main, auxiliary and control current • For size SC NEW • For main, auxiliary and control current • SRA2933-2AA1	3RA2712-2AA00							
3RA2712-1BA00 Assembly kits for making 3-pole contactor assemblies The assembly kit contains: mechanical interlock, 2 connecting clips for two contactors, wiring modules on the top and bottom 3RA2923-2AA1 For size S0 For main, auxiliary and control current For size S2 № For size S2 № For size S2 № For size S2 № For main, auxiliary and control current For size S2 № For main, auxiliary and control current For main, auxiliary and control current For main, auxiliary and control current For size S2 № SRA2933-2AA1 3RA2933-2AA1 3RA2933-2AA1 3RA2933-2AA1 3RA2933-2AA1 3RA2933-2AA1 3RA2933-2AA1 3RA2933-2AA1	Function modules f	or reversing starting ¹⁾						
Assembly kits for making 3-pole contactor assemblies The assembly kit contains: mechanical interlock, 2 connecting clips for two contactors, wiring modules on the top and bottom 3RA2923-2AA1 • For size S00 • For size S0 - For main, auxiliary and control current - Only for main current • For size S2 NEW - For main, auxiliary and control current • SRA2933-2AA1	3RA2712-1BA00	AS-Interface connection, comprising one basic and one coupling module	А	3RA2712-1BA00		А	3RA2712-2BA00	
assemblies The assembly kit contains: mechanical interlock, 2 connecting clips for two contactors, wiring modules on the top and bottom 3RA2923-2AA1 • For size S00 • For size S0 - For main, auxiliary and control current - Only for main current • For size S2 NEW - For main, auxiliary and control current • For main, auxiliary and control current • For size S2 NEW - For main, auxiliary and control current • SRA2933-2AA1	3RA2712-2BA00							
The assembly kit contains: mechanical interlock, 2 connecting clips for two contactors, wiring modules on the top and bottom • For size S00 • For size S0 • For main, auxiliary and control current • Only for main current • For size S2 NEW • For main, auxiliary and control current • SRA2933-2AA1 • For main, auxiliary and control current • SRA2933-2AA1 • For main, auxiliary and control current								
For size S0 For main, auxiliary and control current Only for main current For size S2 NEV For main, auxiliary and control current SRA2923-2AA1 For size S2 NEV For main, auxiliary and control current SRA2933-2AA1 For main, auxiliary and control current	TILL TIE	The assembly kit contains: mechanical interlock, 2 connecting clips for two contactors,						
- For main, auxiliary and control current - Only for main current - For size S2 NEV - For main, auxiliary and control current - SRA2923-2AA1 - SRA2923-2AA1 - SRA2933-2AA1 - SRA2933-2AA1	3RA2923-2AA1		>	3RA2913-2AA1		▶	3RA2913-2AA2	
- For main, auxiliary and control current	effect t	For main, auxiliary and control currentOnly for main current	>	3RA2923-2AA1 		>	 3RA2923-2AA2	
	3RA2923-2AA2	- For main, auxiliary and control current	>	3RA2933-2AA1		В	 3RA2933-2AA2	

¹⁾ For prewired contactor assemblies for reversing starting with voltage tap-off, see pages 3/163 and 3/165. When these contactor assemblies are used, the assembly kit for the wiring is already integrated.

Matching contactors with voltage tap-off required; see pages 3/43 and 3/46.

For matching AS-Interface masters, routers and power supply units, see Chapter 2 "Industrial Communication".

SIRIUS 3RA27 Function Modules for AS-Interface for Mounting on 3RT2 Contactors

For direct-on-line starting / for reversing starting / for wye-delta starting

	Version	DT	Screw terminals		DT	Spring-type	\sim
	16.6.6.1	σ.		+		terminals	$\stackrel{\infty}{\square}$
			Article No.	Price per PU		Article No.	Price per PU
Function modules fo	r wye-delta starting ¹⁾			per PU			per PU
Turiction modules to	AS-Interface connection.	Α	3RA2712-1CA00		Α	3RA2712-2CA00	
State	comprising one basic module and two coupling modules	۸	3KA2712-10A00		^	3NA2712-20A00	
3RA2712-1CA00							
3RA2712-2CA00							
	Assembly kits for making 3-pole contactor assemblies The assembly kit contains:						
HILL TO	mechanical interlock, 4 connecting clips for 3 contactors; star jumper, wiring modules on the top and bottom						
3RA2923-2BB1	• For size S00	>	3RA2913-2BB1			3RA2913-2BB2	
	• For size S0						
HERE E.	- For main, auxiliary and control circuits	▶	3RA2923-2BB1				
1777	- Only for main circuit		-		▶	3RA2923-2BB2	
CARRIE II	• For size S2 NEW						
0040000 0000	- For main, auxiliary and control circuits	>	3RA2933-2BB1			-	
3RA2923-2BB2	- Only for main circuit		-		В	3RA2933-2BB2	
1) For complete contactor	assemblies for wye-delta starting including	Match	ing contactors with	voltage	tar	o-off required: see	nages

For complete contactor assemblies for wye-delta starting including function modules, see pages 3/180 and 3/182. Matching contactors with voltage tap-off required; see pages 3/43 and 3/46.

For matching AS-Interface masters, routers and power supply units, see Chapter 2 "Industrial Communication".

	Version	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Accessories							
	Module connector set, comprising: • 2 module connectors, 14-pole, short • 2 interface covers	NEW A	3RA2711-0EE10		1	1 unit	41B
3RA2711-0EE10							
	Module connectors • 14-pole, 9 cm For size jump + 1 space	<i>NEW</i> A	3RA2711-0EE06		1	1 unit	41B
3RA2711-0EE06							
	Interface covers (Set of 5)	<i>NEW</i> A	3RA2711-0EE15		1	1 unit	41B
3RA2711-0EE15							
3RA2910-0	Sealable covers For 3RA27, 3RA28, 3RA29	А	3RA2910-0		1	5 units	41B

For manuals, see

http://support.automation.siemens.com/WW/view/en/39318922.

SIRIUS 3RA27 Function Modules for AS-Interface for Mounting on 3RT2 Contactors

Notes