



## Approvals / Marking



## Junction boxes

### Flex-o-Box

IP65



## Features

### Flex-o-Box Junior

#### Technical data

- Suitable for surface mounting
- 2.5 mm<sup>2</sup> - 500V
- IP65 protection degree
- Standards and approvals  
CEBEC: NBN C 68-685-2-0  
NBN C68-685-1  
KEMA: EN/IEC 670
- Colour: RAL 7035
- Material: resists the 750°C incandescent wire test
- Halogen-free
- Operating temperature: -5°C to +60°C
- Total insulation: ☐

#### Eight flexible entries

- 7 x Ø 20 in the side wall
- 1 x Ø 20 in the back
- Suitable for cable max. Ø 20
- Suitable for tubes 5/8" and 3/4"

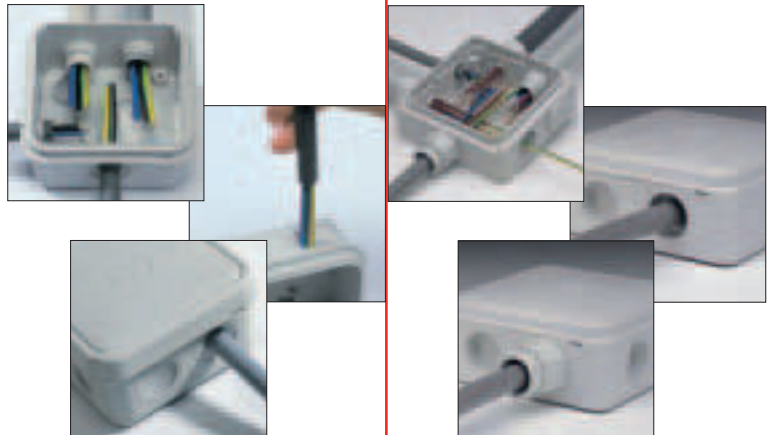
### Flex-o-Box JB<sup>6</sup>

#### Technical data

- Suitable for surface mounting
- 6 mm<sup>2</sup> - 500V
- IP65 protection degree
- Standards and approvals:  
CEBEC: NBN C68-685-2-0  
NBN C68-685-1  
KEMA: EN/IEC 670
- Colour: RAL 7035
- Material: resists the 750°C incandescent wire test
- Halogen-free
- Operating temperature: -5°C to +60°C
- Total insulation: ☐



#### Nine flexible entries

- 7 x PG16 in the side wall
- 2 x Ø 20 mm max. entries in the back of the base
- Suitable for cable max. Ø 20
- Suitable for tubes 5/8" and 3/4"
- Suitable for cable seals (8 mm min. thread length)



Dimensions ● pg F.59

## Flex-o-Box

		Ref. No.	Pack.
	<b>Junior</b> Junction box 2.5 mm <sup>2</sup> Junction box 2.5 mm <sup>2</sup> (40 pieces in a red polybox basket)	600656	10/100
		600311	1
	<b>JB<sup>6</sup></b> Junction box 6 mm <sup>2</sup> Junction box 6 mm <sup>2</sup> (24 pieces in a grey polybox basket)	600651	100/200
		600310	1/24

## Accessories

for Junior and JB <sup>6</sup>		only for JB <sup>6</sup>			
	<b>Terminal block</b>	<b>600950</b>	30		<b>A</b>  <b>B</b>  <b>C</b>
	6 mm <sup>2</sup> - 500V - pin-type				
	5-terminal blocks				
	Possible connections per terminal:				
6 x 1.5 mm <sup>2</sup>	2 x 6 mm <sup>2</sup>				<b>D</b>  <b>E</b>
4 x 2.5 mm <sup>2</sup>	2 x 10 mm <sup>2</sup>				
3 x 4 mm <sup>2</sup>					
	<b>Terminal strip</b>	<b>600650</b>	20/200		<b>F</b>  <b>G</b>  <b>X</b>
	6 mm <sup>2</sup> - 500V - hole-type				
	5-terminal strips				
	Possible connections per terminal:				
6 x 1.5 mm <sup>2</sup>	3 x 4 mm <sup>2</sup>				
4 x 2.5 mm <sup>2</sup>	2 x 6 mm <sup>2</sup>				
					
					