





Type: **31.10 03 00**


External dimensions: **110 x 230 x 85 mm**

Weight: **410 g**

DIN rail length in mm	max. fitting length in mm	Mounting plate (thickness in mm)	External mounting brackets	Lid safety strip	EMC version	Allen lid screws	Silicone lid seal	Sealable lid screws
TS 35								
220	192			•	•		•	

Maximum number of cable glands to DIN 50262\*

M	Corner dim.	Side		PG	Corner dim.	Side	
		A/B	C/D			A/B	C/D
12	17,25	20	1	7	17,25	20	1
16	25,30	8	1	9	21,85	15	1
20	27,60	7	1	11	25,30	8	1
25	37,95	4	1	13,5	27,60	7	1
32	48,30			16	31,05	6	1
40	60,95			21	37,95	4	
50	69,00			29	48,30		
63	74,75			36	60,95		
				42	69,00		
				48	74,75		

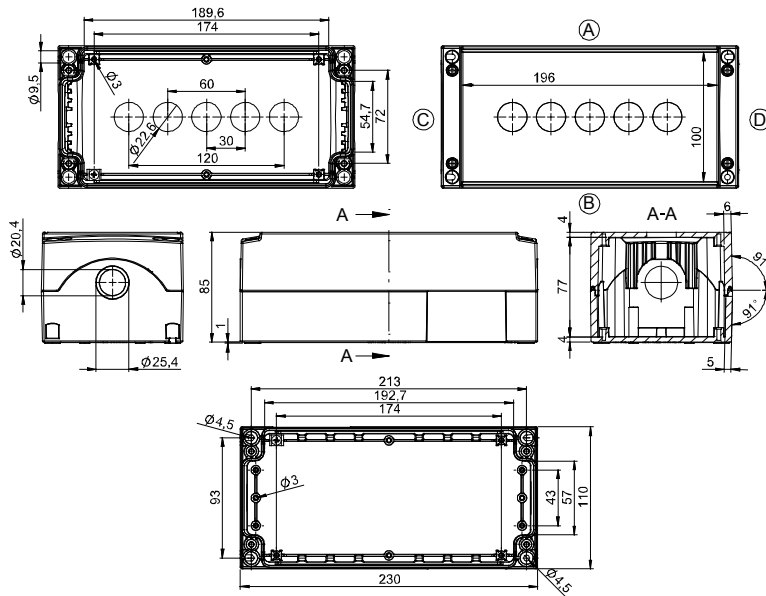

## Cable glands



- Cable glands, blind plugs and counter-nuts of polyamide and brass
- High protection type
- Metric and PG version

### Technical data

**Material:**

Polyamide / brass

**Colour:**

Polyamid: RAL 7035, light grey

Brass: nickel plated surface

**Ingress protection:**

up to IP 68