



- Stainless steel control enclosure system for hygienic areas
- High quality surface
- Integrated handle set

Technical data

Material:

enclosure body/door:
stainless steel 1.4301 (304); wall thickness 1.5 mm
other materials on request

Ingress protection:

IP 65 to EN 60529

Seal:

VMQ (silicone)

EMC on request

Surface:

grinded, grain 240

Temperature range:

-40°C to +80°C

Included in delivery:


Enclosure body - depending on design with closed or individually fitted enclosure front, door at the rear, internal mounting bracket, handle set and coupling hole for ROSE stainless steel GTH mounting system

Commander 400


Product range

Order No.	Weight (g)	Dimensions (mm)													Drillings for suspension system (side A)
		A	B	C	D	E	F	G	H	J	K	L	M	N	
56.01 04 01	7500	387	247	162	300	200	170	270	156	132	99	82	93°	87°	Picture 1 (GTH 48)
56.02 04 01	9000	487	247	162	400	200	170	370	156	132	99	82	93°	87°	Picture 1 (GTH 48)
56.03 04 01	12000	499	347	212	400	300	270	370	256	182	99	82	93°	87°	Picture 1 (GTH 48)
56.04 04 01	14500	507	447	212	408	400	370	378	356	182	99	82	93°	87°	Picture 1 (GTH 48)
56.05 04 01	14000	599	347	212	500	300	270	470	256	182	109	94	77°	103°	Picture 2 (GTH 60)
56.06 04 01	19500	619	447	292	500	400	370	470	356	262	109	94	77°	103°	Picture 2 (GTH 60)
56.07 04 01	24500	737	447	362	600	400	370	570	356	332	109	94	77°	103°	Picture 2 (GTH 60)
56.99 04 92*		Special size													on request


* Special size: above 25 pcs./order
Cutout of size, state by order

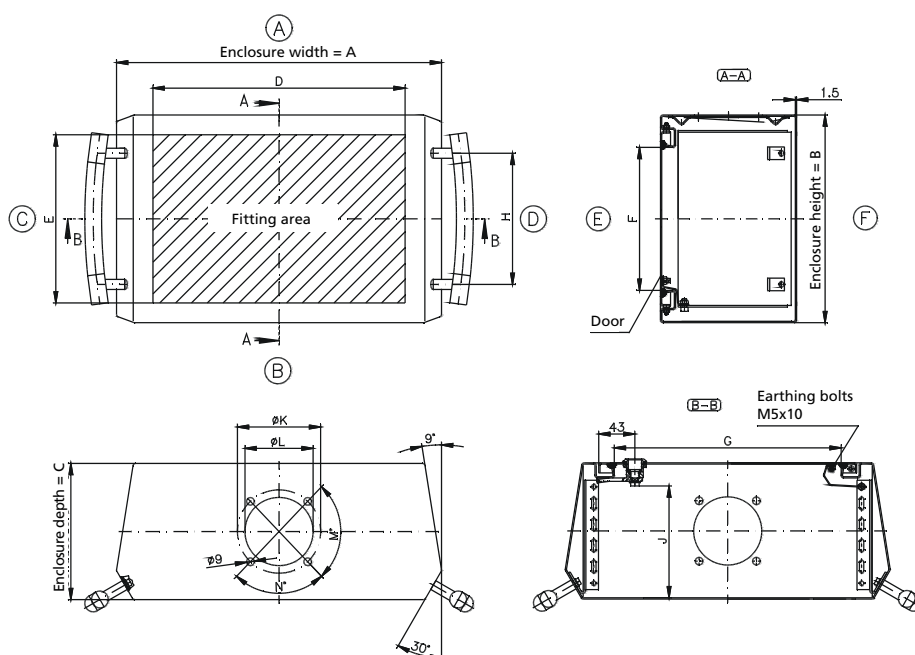

Picture 1:
Coupling drill hole (GTH 48)



Picture 2:
Coupling drill hole (GTH 60)



Accessories

Mounting angle set	56.00 00 05
--------------------	-------------