

Commander 410



- Stainless steel Commander with screwed rear wall for hygienic areas
- Droop acc. to hygienic design regulations
- High material quality

Technical data

Material:

stainless steel 1.4404/316L

Ingress protection:

IP 66 / IP 69K to EN 60529

Seal:

silicone

Surface:

grinded, grain 240

Temperature range:

-40°C to +80°C


Included in delivery:

Enclosure with screwed rear wall, silicone seal - depending on version with closed or individual manufactured front, internal fixing and coupling hole for suspension system GTH 48

Commander 410

Product range

Order No.	Dimensions (mm) W x H x D	Z	Fitting width	Fitting height	Drillings for suspension system (side A)	Weight (g)
56.10 02 01	380 x 250 x 150	37	320	245	GTH 48	9000
56.10 02 02	380 x 250 x 220	55	320	245	GTH 48	9000
56.10 02 03	500 x 350 x 150	37	440	345	GTH 48	11000
56.10 02 04	500 x 350 x 220	55	440	345	GTH 48	11500
56.10 02 05	500 x 450 x 150	37	440	445	GTH 48	12000
56.10 02 06	500 x 450 x 220	55	440	445	GTH 48	12500

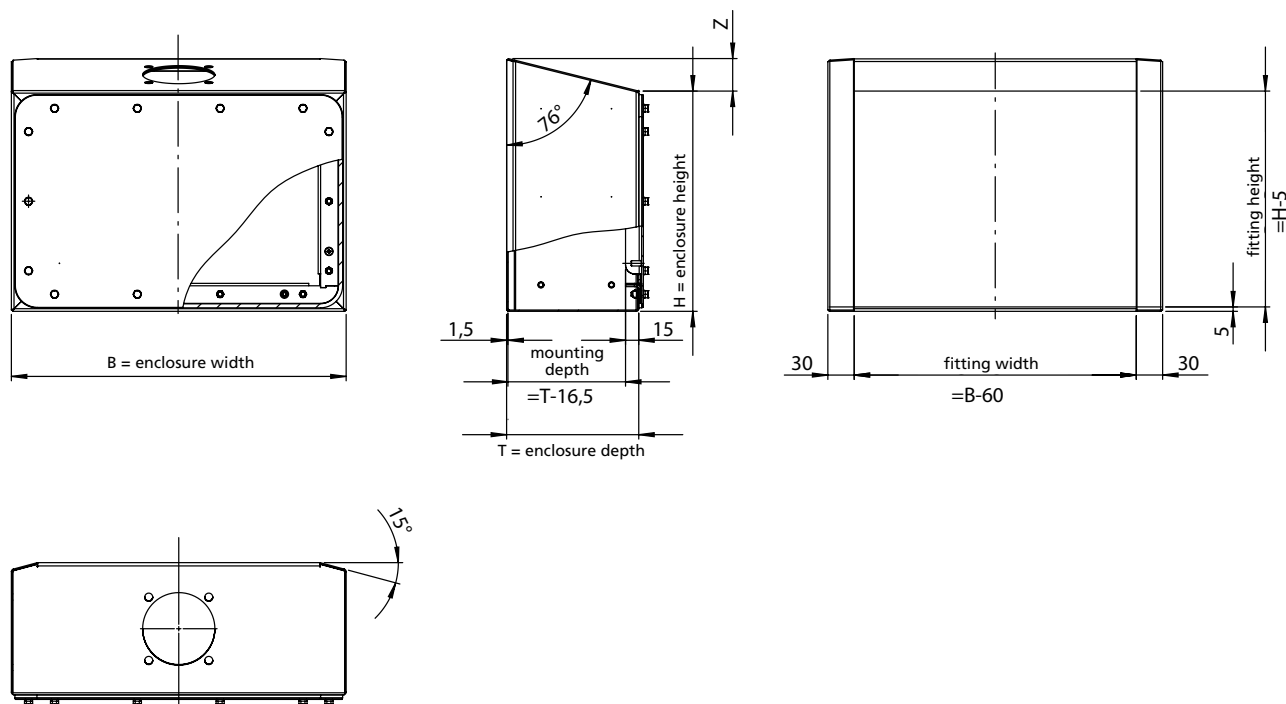

Accessories

Mounting angle set for internal fitting of components **56.20 99 01**

