

Commander 420



- Stainless steel Commander with door for industrial applications
- High material quality
- Optional handle set

Technical data

Material:

Stainless steel 1.4301/304

other materials on request

Ingress protection:

IP 65 to EN 60529

Seal:

Silicone

Surface:

grinded, grain 240

Temperature range:

-40°C to +80°C


Included in delivery:

Enclosure with door, rect angle, silicone seal - depending on version with closed or individual manufactured front, internal fixing and coupling hole for suspension system GTH 48

Commander 420

Product range

Order No.	Dimensions (mm) W x H x D	Fitting width	Fitting height	Drillings for suspension system (side A)	Weight (g)
56.20 01 01	380 x 250 x 150	338	240	GTH 48	9000
56.20 01 02	380 x 250 x 220	338	240	GTH 48	9000
56.20 01 03	500 x 350 x 150	458	340	GTH 48	10000
56.20 01 04	500 x 350 x 220	458	340	GTH 48	11000
56.20 01 05	500 x 450 x 150	458	440	GTH 48	12000
56.20 01 06	500 x 450 x 220	458	440	GTH 48	12000

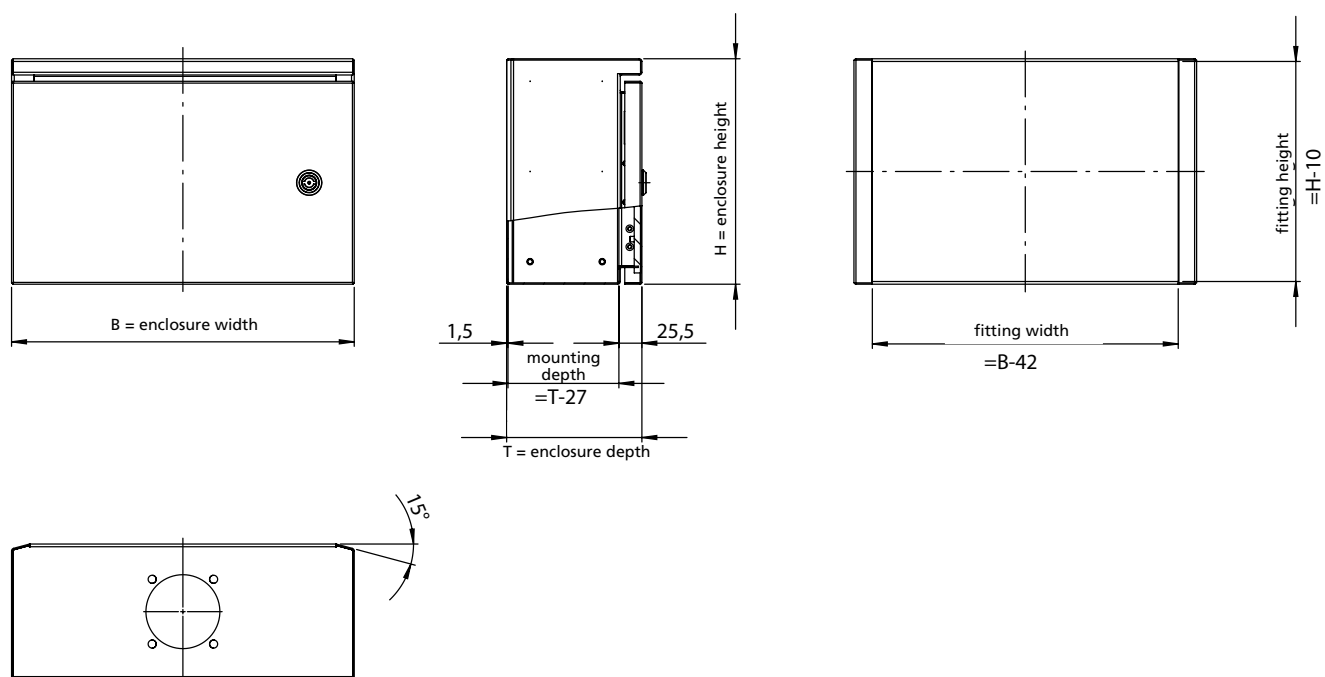

Accessories

Handle set ECO for Commander 420, L = 220 mm	56.20 01 93
Handle set ECO for Commander 420, L = 320 mm	56.20 01 94
Handle set ECO for Commander 420, L = 420 mm	56.20 01 95
Mounting angle set for internal fitting of components	56.20 99 01

