



stripLite SL-4000

LED enclosure light

2016





stripLite LED enclosure light

stripLite SL-4000		
Type	24 - 265 V	12 V
Order no. with motion sensor, Wieland	400000	400012
Order no. with motion sensor, push fit	400400	400412
Order no. with ON/OFF switch, Wieland	400100	400112
Order no. with ON/OFF switch, push fit	400500	400512
	PERFORMANCE DATA	
Power Consumption	4 Watt	
Light output (luminous flux)	400 Lm	
Light color / temperature	Cool white / 6,500K	
Lamp type	LED, 120°angle	
Life time (@ 20°C)	40,000 hrs.	
Operating temp. range	-30°C - +70°C	
Switch off time (motion sensor)	5 min.	
	DIMENSIONS	
Dimensions (L x W x H)	357.4 x 32 x 35.5 (31.16) mm	
Material housing	PC clear (Top), PC blue (Base)	
Weight	140 gr.	
	ELECTRICAL DATA	
Voltage / Frequency	24 - 265 V AC / DC ~ 50/60 Hz	12 V DC
Protection class	II (double insulated)	
IP protection to IEC 60 529	IP 20	
Mounting	Magnets, clips	
Certification	CE, RoHS, cURus	


'Lights off, LED on'

The new **stripLite** LED light fixture is the economical and space saving solution for cabinet and enclosure lighting. The state of the art LED technology ensures a long and maintenance free life cycle.


The main features are:

- Combined AC & DC voltage range allows the universal use with a single model
- Motion sensor or ON/OFF switch available
- Various fitting options for more flexibility
- Daisy chain cables allow to connect up to 16 lights with AC and up to 8 lights with DC voltage
- Wieland or push fit connector for fast and easy installation

Mounting Accessories



Screw mount clip M6

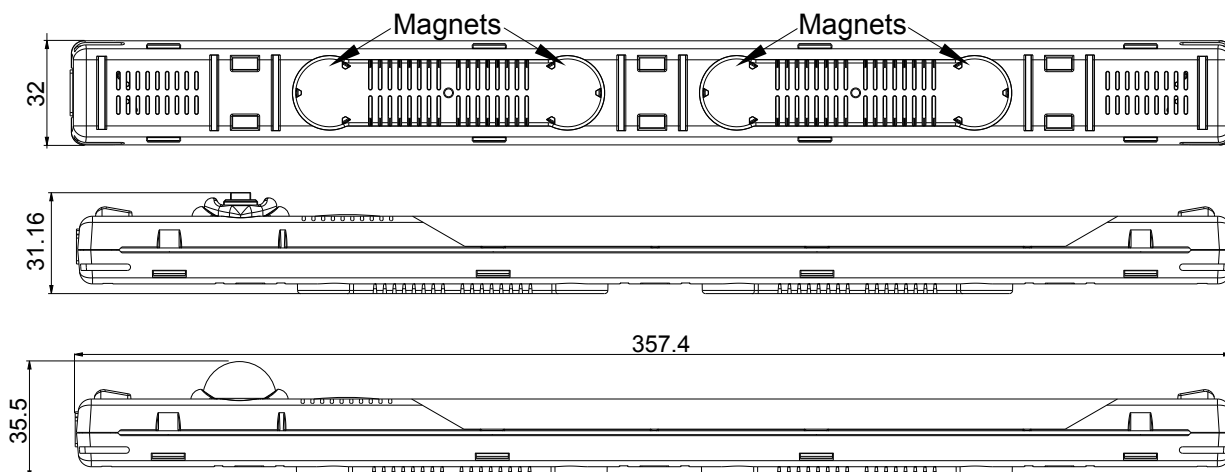



Wieland female connector



Wieland male connector

Type	Description	Cable colour	Mounting	Approvals
WS 400702	Wieland female connector for cables Ø 6 - 7.7 mm, AWG 18-22		Screw connection	CE, RoHS, cURus
WS 400703	Wieland male connector for cables Ø 6 - 7.7 mm, AWG 18-22		Screw connection	CE, RoHS, cURus



WK 400711	Power cable 2 x AWG 18, halogen free with Wieland female connector, 3 m	white	Plug connection	CE, RoHS, cURus ¹⁾
WK 400712	Power cable 2 x AWG 18, halogen free with Wieland female connector, 3 m	orange	Plug connection	CE, RoHS, cURus ¹⁾
WK 400713	Power cable 2 x AWG 18, halogen free with Wieland female connector, 3 m	blue	Plug connection	CE, RoHS, cURus ¹⁾

¹⁾ applies only to individual components, connector and cable



DC 400721	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 0.5 m	white	Plug connection	CE, RoHS, cURus ¹⁾
DC 400722	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 0.5 m	orange	Plug connection	CE, RoHS, cURus ¹⁾
DC 400723	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 0.5 m	blue	Plug connection	CE, RoHS, cURus ¹⁾
DC 400731	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 1 m	white	Plug connection	CE, RoHS, cURus ¹⁾
DC 400732	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 1 m	orange	Plug connection	CE, RoHS, cURus ¹⁾
DC 400733	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 1 m	blue	Plug connection	CE, RoHS, cURus ¹⁾

¹⁾ applies only to individual components, connector and cable



Power cable 2 x AWG 18, halogen free with door switch and Wieland female connector.
Door switch: normally closed (NC), strain release, mounting plate.

DC 400742	Power cable 2 x AWG18, with door switch and Wieland female connector, 3.5 m	orange	Plug connection	CE, RoHS, cURus ¹⁾
-----------	---	--------	-----------------	-------------------------------

¹⁾ applies only to individual components, connector and cable

Push fit connector



Ø AWG 22 -16




Ø AWG 22 -18

Wieland connector



Ø 6 - 7.7 mm

Ø AWG 20

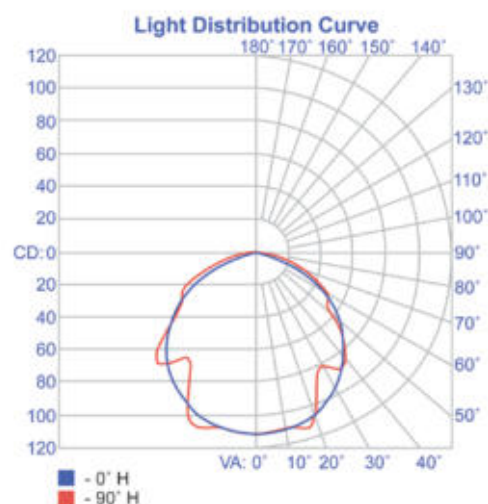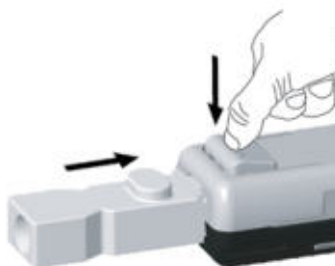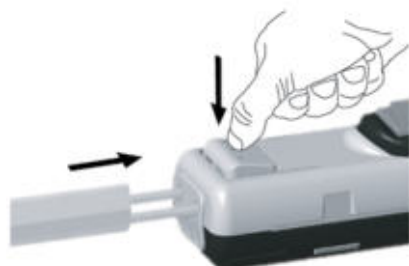



Seifert Systems GmbH	Seifert Systems Ltd.	Seifert Systems AG	Seifert Systems Inc.	Seifert Systems Australia Pty Ltd.
Haßlinghauser Str. 156 58285 Gevelsberg	HF 09/10 Hal Far Industrial Estate Birzebbuga, BBG 3000	Wilerstraße 16 CH- 4563 Gerlafingen	75 Circuit Drive North Kingstown RI 02852 USA	105 Lewis Road Wantirna South 3152 Victoria Australia
Germany	Malta	Switzerland		
Tel. +49 (0) 2332 55124-0 Fax +49 (0) 2332 5512429	Tel. +356 2220 7000 Fax +356 2165 2009	Tel. +41 (0) 32 675 35 51 Fax +41 (0) 32 675 44 76	Tel. +1 401-294-6960 Fax +1 401-294-6963	Tel. +61 (3) 98 01 19 06 Fax +61 (3) 98 87 08 45
info.de@seifertsystems.com	info@seifertsystems.com	info.ch@seifertsystems.com	info.us@seifertsystems.com	info@seifertsystems.com.au

www.seifertsystems.com



www.facebook.com/seifert.mtmsystems



ЭЙБІЭН

Tel.: +375 17 310 44 44

Tel. +375 44 592 00 86

Tel. +375 33 366 51 85

<https://www.abn.by>

info@abn.by