

COMPLEMENTARY PRODUCTS

SpaceGuard™ Series

SGP 30


- Diffuse proximity operation mode
- 0-1,3 metre sensing range
- 8 to 40 proximity channels
- Active length of 330 mm to 1800 mm
- Housing length of 510 mm to 1980 mm
- Plug connection
- Sensitivity adjustment via potentiometer
- Water-resistant (23,4x30,9 mm) detector housing
- High tolerance to hostile environments
- Power, output and system status indicators
- 12-30 V dc supply voltage
- 5 wire, solid state relay output
- Blanking function



Optical Frame Sensor Series

OAS

- 50 mm to 250 mm frame width
- Aluminium housing
- Plug connection
- Infrared light source
- Sensitivity adjustment via potentiometer
- Pulse stretching adjustment via potentiometer
- Dynamic or static detection principle
- Output indicator
- High tolerance to hostile environments
- 24 V dc supply voltage
- 3 wire, PNP output
- Fast response time
- High resolution from 0,5 mm

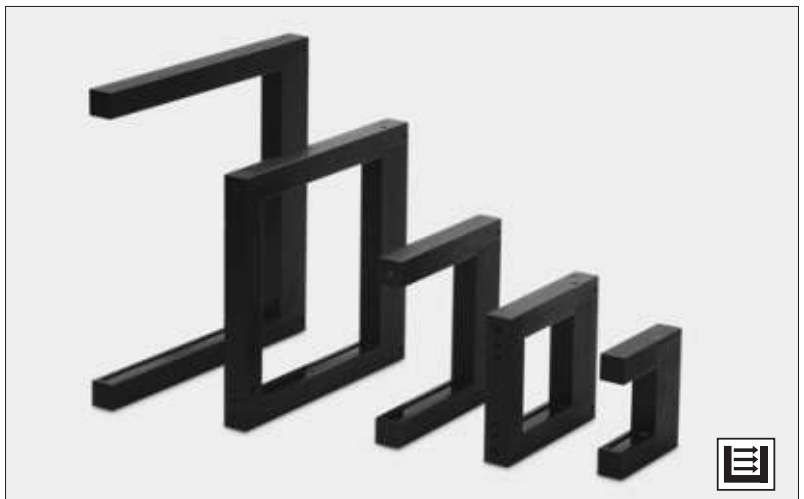

SpaceMotion™ Series

SMM 01

- K-Band motion and direction detection
- Max sensing range: 3 metres
- Adjustable sensing field range
- Adjustable slow speed zone
- Selectable background suppression
- Selectable direction sensitive detection
- Adjustable off time delay
- 10-30 V dc or 24 V ac supply voltage
- Power and output indicators
- Solid state relay output
- Output monitor function (Sniffer)
- Compact IP67 housing design



Please ask for your free literature or visit our website
www.telcosensors.com