








Technical Information





Plastic Enclosures




Solid-Rubber Enclosure



Floor-Standing Distributors and Rain Shields for VARIABOX and MODBOX Systems



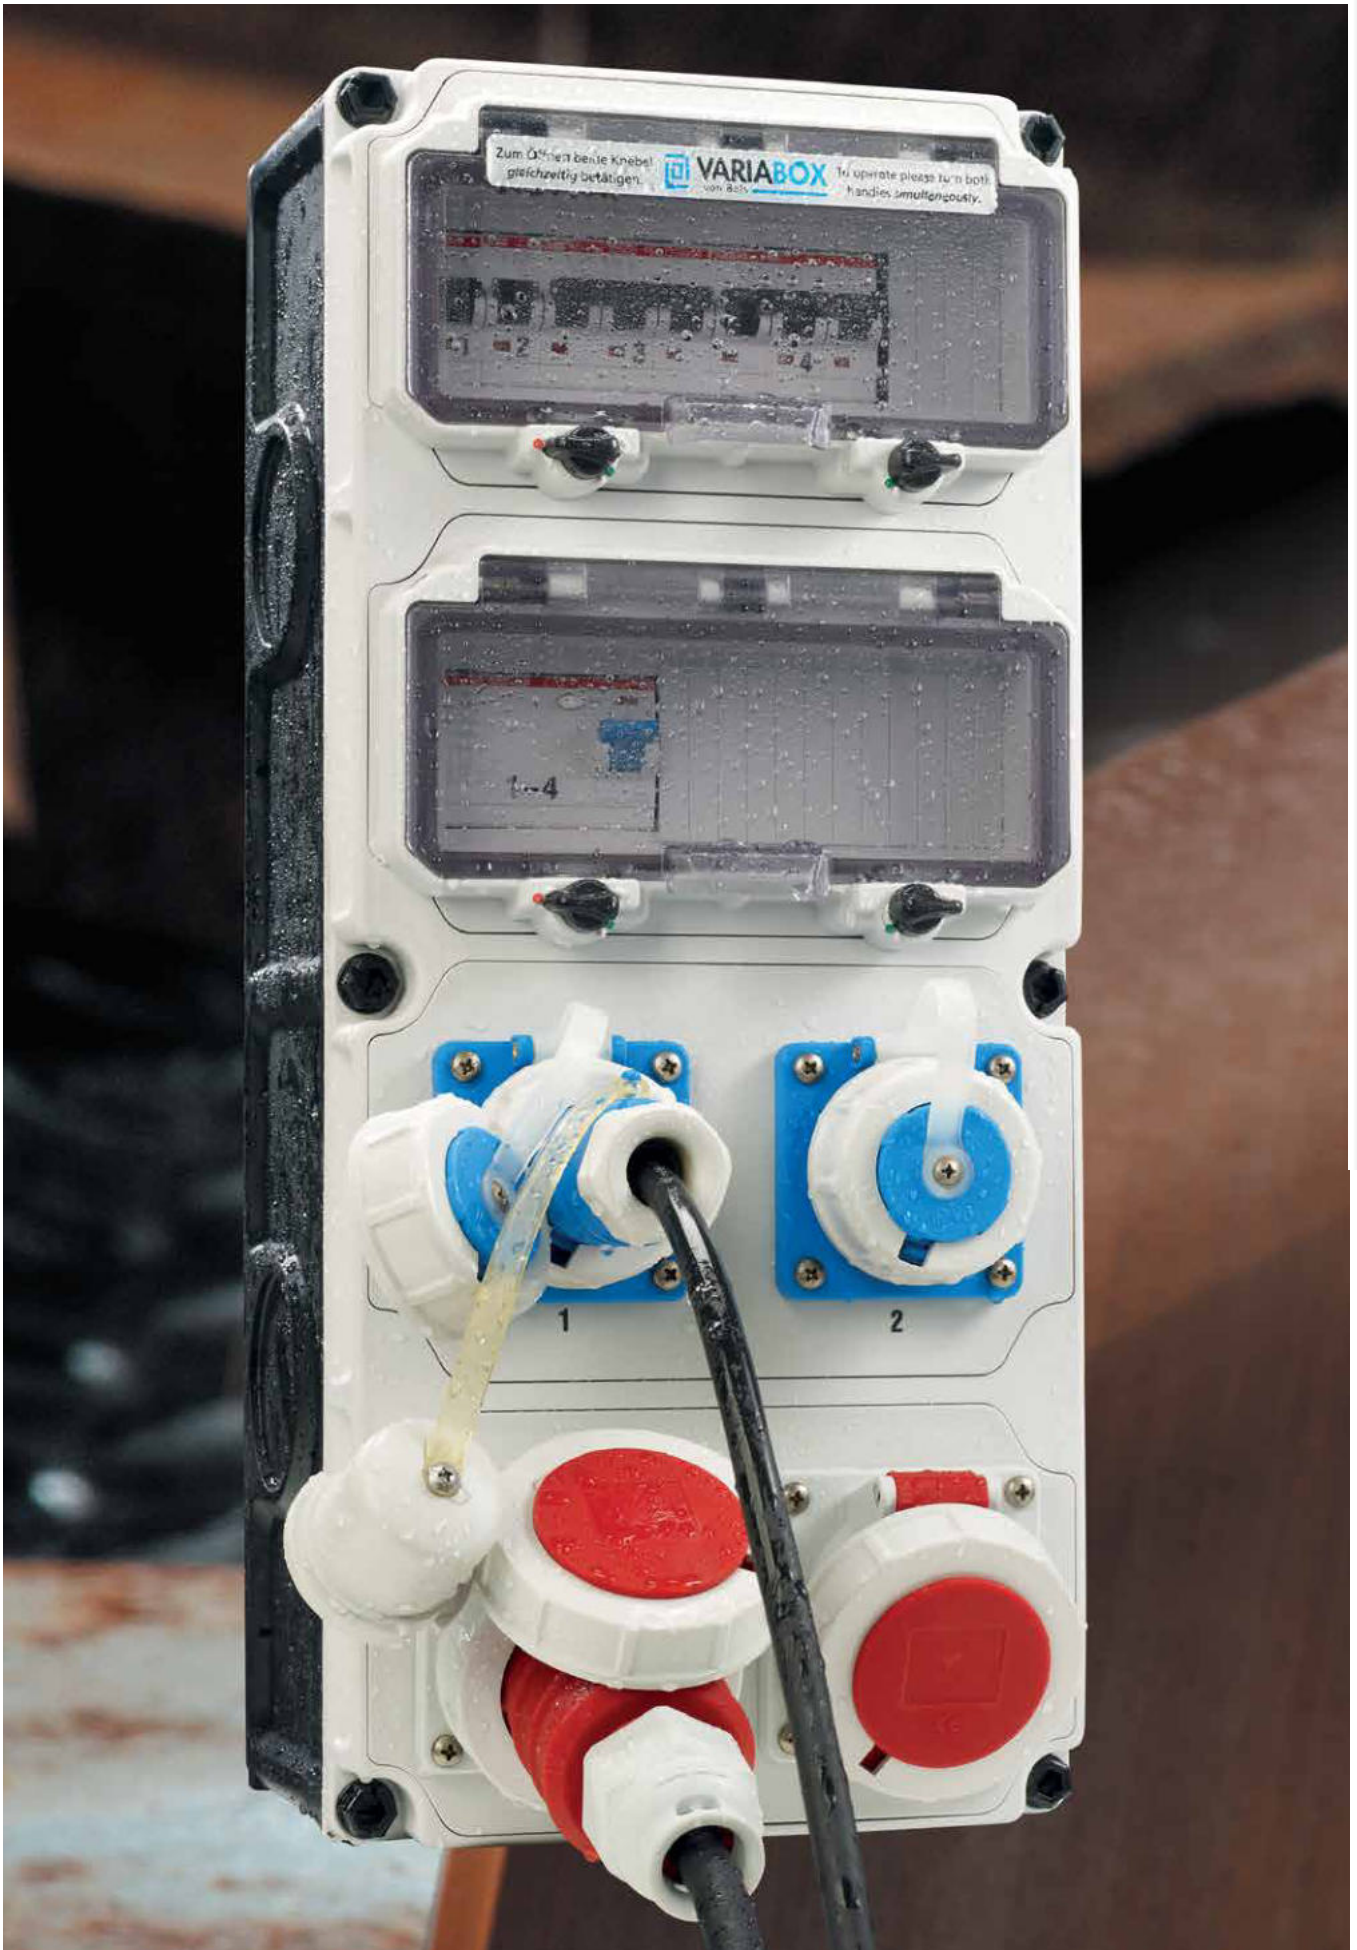

Technical data VARIABOX

Sizes

Version	Dimensions (H x W x D)
VARIABOX-S	130 x 230 x 145 mm
VARIABOX-M	260 x 230 x 145 mm
VARIABOX-L	390 x 230 x 145 mm
VARIABOX-XL	520 x 230 x 145 mm
VARIABOX-XXL	650 x 230 x 145 mm
VARIABOX-L DUO	390 x 460 x 145 mm
VARIABOX-XL DUO	520 x 460 x 145 mm
	Further modular extension possible

Colours

Top grey (standard) RAL 7035
 Top - yellow, available as of 5 units
 Top - blue, available as of 5 units
 Top - red, available as of 5 units
 Top - silver, available as of 5 units
 Bottom black RAL 9005

Design

Top cover straight,
 CEE sockets angled

Material

PBT polyester

Material properties

Self-extinguishing, heat-resistant, extremely cold-resistant, resistant to ageing, saltwater-resistant, good electric insulation properties, fracture-proof, wear-, resistant, abrasion-resistant, dimensionally stable

Durable

High chemical resistance,
 UV-stabilised, suitable for
 use in hostile environments

Impact strength

IK09

Thermal resistance

DIN EN 61439/ VDE 0660-600

Resistant to ageing

Long-term testing at +80 degrees

Glow wire test

In accordance with DIN EN60695

Protection

Top can be lead-sealed to bottom,
 OTC window can be lead-sealed

Wall mounting

Either internal or
 external fastening

Top cover attachment

Hinged on right,
 Can be hinged on left on request

Top cover screws

Captive, with internal and external
 hexagon, including slot,
 torque 2 Nm

Cable entry

Face plates pre-punched at top
 and bottom
 each with M12, M20, M25/M32/M40

Attachments

User-friendly OTC mechanism
 (One Touch Close),
 CEE sockets 16A to 63A with
 maintenance-free QUICK-CONNECT
 technology, data sockets,
 intercompatibility of mounted sockets,
 optionally available with handle

Protection type

IP44, IP54, IP67

Environment

PVC-free, cadmium-free, halogen-free
 and silicone-free



- Proper and clearly arranged wiring and an automated safety test guarantee maximum safety
- With their generous cable bushings, modularly connected VARIABOX systems can be internally connected to one another even when using large cable cross sections



- The new operating window with the unique OTC mechanism (One Touch Close) engages in the open state and automatically closes and locks again when touched lightly
- The enclosure sections and the OTC operating windows can all be lead-sealed
- Either internal or external fastening



- All mounted sockets with maintenance-free QUICK-CONNECT technology
- sockets with flange dimensions 50 x 50 mm, 75 x 75 mm and 85 x 85 mm not manufacturer specific



- The metric cable entries at the top and bottom are pre-punched and can be broken out as required without problem. An overview of the enclosure sizes and cable entries can be found on page 4.







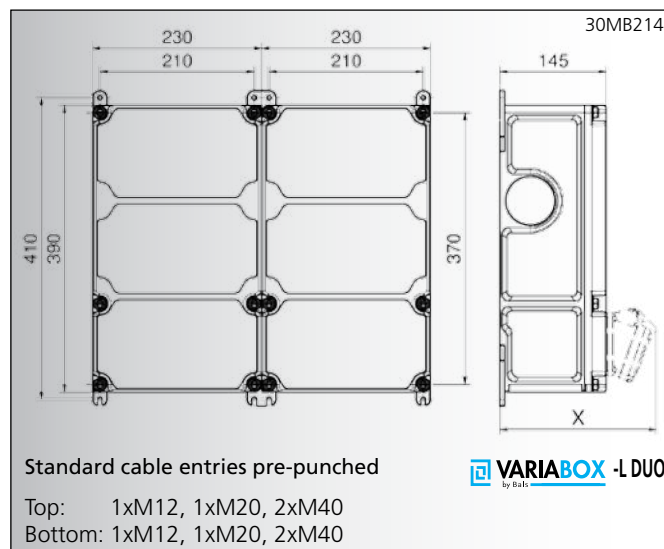


Table X-dimension

Components	Oper. window	Domestic socket		CEE 16A 3-pole		CEE 16A 4-pole		CEE 16A 5-pole		CEE 32A, 3/4-pole		CEE 32A 5-pole		CEE 63A	
Protection class		IP44	IP67	IP44	IP67	IP44	IP67	IP44	IP67	IP44	IP67	IP44	IP67	IP44	IP67
Depth X	180	162	205	200	200	204	202	207	205	211	213	213	214	229	231

Technical changes possible.

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

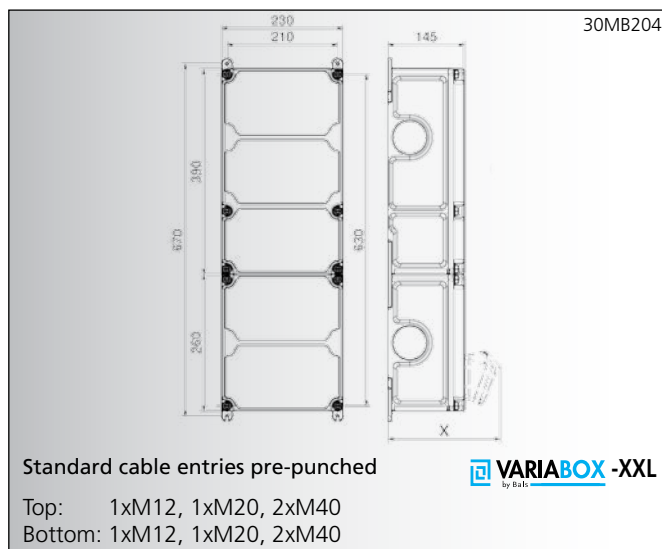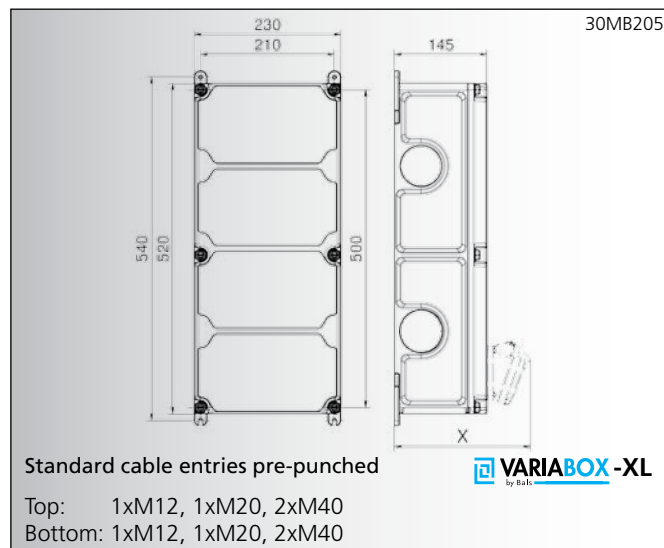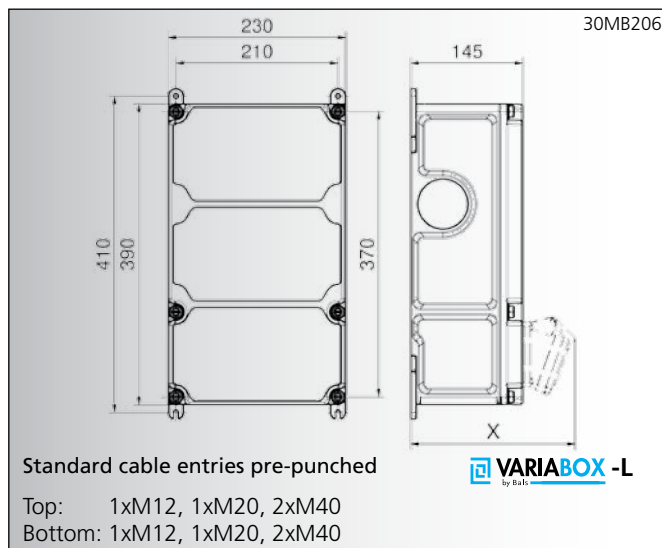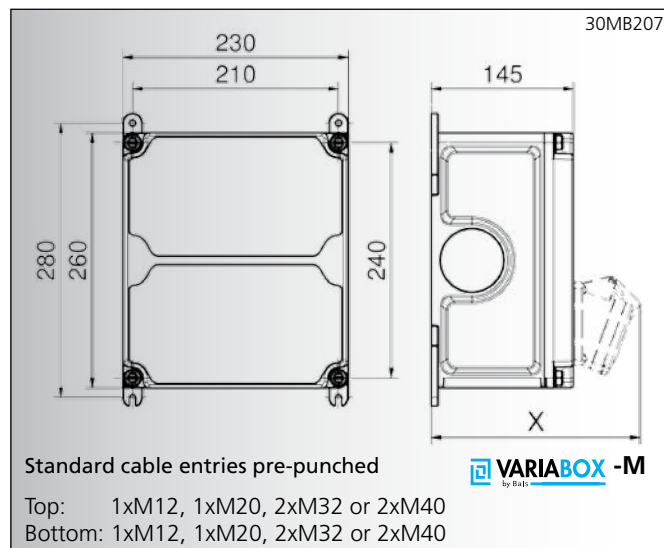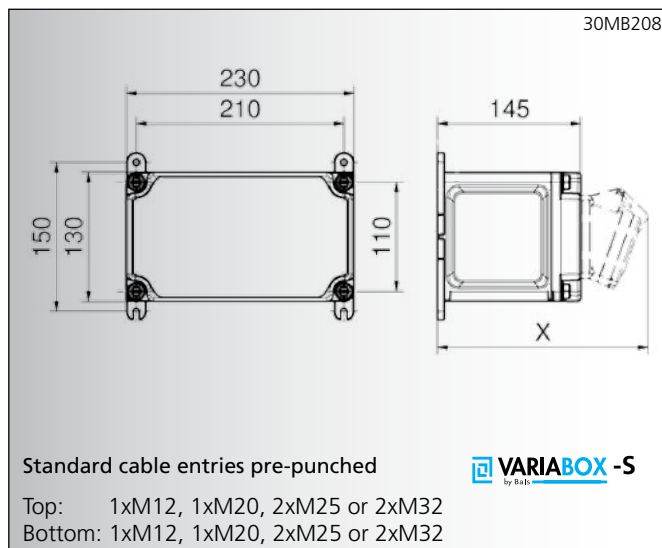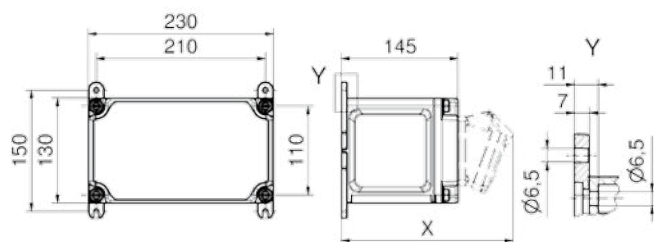

depth x in (mm)

with	IP44
OTC operating window	180
schuko-type	162
CEE 16A 3p	200
CEE 16A 4p	204

30 MB 208

with	IP44
CEE 16A 5p	207
CEE 32A 3p/4p	211
CEE 32A 5p	213
CEE 63A 3p/4p/5p	229

- Dimension of enclosure: 130 x 230 mm
- Housing made of high-grade, impact-resistant plastic
- Top and bottom can be sealed together
- With external and internal fastening
- Permanently attached cover screws
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)
- Accessories: see page 136

VARIABOX -S

 Order no. **89003**
Components:

 3 domestic sockets 16A, 230V ~
 (system F - German earthing System)

Cable entry at top and bottom:
 each with 1x M12, 1x M20, 2x M25

Connection option:
 for 1 cable up to 5 x 6 mm²

VARIABOX -S

 Order no. **89006**
Components:

 4 domestic sockets 16A, 230V ~
 (system F - German earthing System)

Cable entry at top and bottom:
 each with 1x M12, 1x M20, 2x M25

Connection option:
 for 1 cable up to 5 x 6 mm²

VARIABOX -S

 Order no. **89002**
Components:

 1 domestic socket 16A, 230V
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p

Cable entry at top and bottom:
 each with 1x M12, 1x M20, 2x M25

Connection option:
 for 1 cable up to 5 x 6 mm²

VARIABOX -S

 Order no. **89004**
Components:

 2 domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p

Cable entry at top and bottom:
 each with 1x M12, 1x M20, 2x M25

Connection option:
 for 1 cable up to 5 x 6 mm²

VARIABOX -S

 Order no. **89058**
Components:

 2 domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 32A, 400V, 5p

Cable entry at top and bottom:
 each with 1x M25, 1x M32

Connection option:
 for 1 cable up to 3 x 4 mm² and
 1 cable up to 5 x 6 mm²

VARIABOX -S


 Order no. **89000**
Components:

2 CEE sockets 16A, 400V, 5p

Cable entry at top and bottom:
 each with 1x M12, 1x M20, 2x M25

Connection option:
 for 1 cable up to 5 x 6 mm²


- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

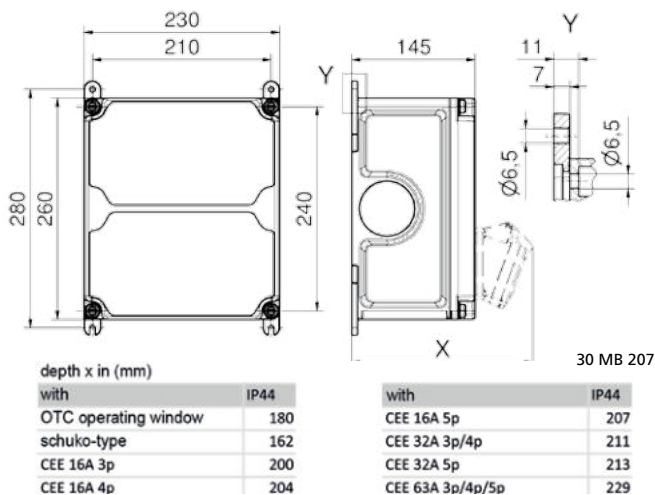

- Dimension of enclosure: 260 x 230 mm
- Housing made of high-grade, impact-resistant plastic
- Hinged enclosure cover
- Top and bottom can be sealed together
- With external and internal fastening
- User-friendly OTC operating window
- Permanently attached cover screws
- Coded flange plate system for maximum safety during initial installation and maintenance
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)
- Accessories: see page 136

VARIABOX -M

Order no. **89016**

Components:

3 domestic sockets 16A, 230V ~
(system F - German earthing System)

Fuse:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M32

Connection option:
for 2 cables up to 5 x 25 mm²



VARIABOX -M

Order no. **890400**

Components:

3 domestic sockets 16A, 230V ~
(system F - German earthing System)
1 double data socket RJ45 CAT 6 IP55

Fuse:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 2x M20, 2x M32

Connection option:
for 2 cables up to 5 x 25 mm²



VARIABOX -M

Order no. **89040**

Components:

4 domestic sockets 16A, 230V ~
(system F - German earthing System)

Fuse:

4 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M32

Connection option:
for 2 cables up to 5 x 25 mm²



VARIABOX -M

Order no. **89037**

Components:

8 domestic sockets 16A, 230V ~
(system F - German earthing System)

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M32

Connection option:
for 1 cable 5 x 6 mm²



VARIABOX -M

Order no. **89044**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Fuse:

2 Neozed D01, 1p
1 Neozed D01, 3p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



VARIABOX -M

Order no. **89010**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

VARIABOX -M

Order no. 89015
Components:

2 domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 32A, 400V, 5p

Fuse:

2 Neozed D01, 1p
 1 Neozed D02, 3p

Cable entry at top and bottom:

each with 1x M12, 1x M20, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²

VARIABOX -M

Order no. 89013
Components:

2 domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
 1 C-type MCB 32A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:

each with 1x M12, 1x M20, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²

VARIABOX -M

Order no. 89017
Components:

2 CEE sockets 16A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:

each with 1x M12, 1x M20, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²

VARIABOX -M

Order no. 89028
Components:

2 domestic sockets 16A, 230V ~
 (system F - German earthing System)
 2 CEE sockets 16A, 400V, 5p

Cable entry at top and bottom:

each with 1x M12, 1x M20, 2x M25

Connection option:

for 1 cable 3 x 4 mm² and
 1 cable 5 x 4 mm²

VARIABOX -M

Order no. 89038
Components:

5 domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p

Cable entry at top and bottom:

each with 1x M12, 1x M20, 2x M25

Connection option:

for 1 cable up to 5 x 6 mm²

VARIABOX -M

Order no. 89022
Components:

1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Fuse:

1 Neozed D01, 3p
 1 Neozed D02, 3p

Cable entry at top and bottom:

each with 1x M12, 1x M20, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²

VARIABOX -M

Order no. 89048
Components:

1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Fuse:

1 C-type MCB 16A, 3p
 1 C-type MCB 32A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:

each with 1x M12, 1x M20, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²

VARIABOX -M

Order no. 890011
Components:

2 CEE sockets 32A, 400V, 5p

Fuse:

2 C-type MCBs 32A, 3p
 1 RCCB 63/0.03A, 4p


Cable entry at top and bottom:

each with 1x M12, 1x M20, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

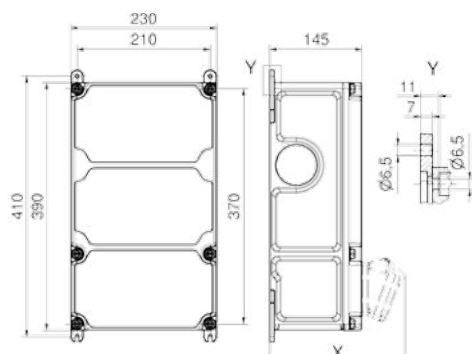

depth x in (mm)

with	IP44
OTC operating window	180
schuko-type	162
CEE 16A 3p	200
CEE 16A 4p	204

30 MB 206

with	IP44
CEE 16A 5p	207
CEE 32A 3p/4p	211
CEE 32A 5p	213
CEE 63A 3p/4p/5p	229

- Dimension of enclosure: 390 x 230 mm
- Housing made of high-grade, impact-resistant plastic
- Hinged enclosure cover
- Top and bottom can be sealed together
- With external and internal fastening
- User-friendly OTC operating window
- Permanently attached cover screws
- Coded flange plate system for maximum safety during initial installation and maintenance
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)
- Accessories: see page 136

VARIABOX -L



Order no. **89084**

Components:

6 domestic sockets 16A, 230V ~
(system F - German earthing System)

Fuse:

6 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L



Order no. **89085**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Fuse:

2 Neozed D01, 1p
2 Neozed D01, 3p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L



Order no. **89075**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L



Order no. **89086**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 Neozed D01, 1p
1 Neozed D01, 3p
1 Neozed D02, 3p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L



Order no. **89076**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L



Order no. **89070**

Components:

3 domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p


Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

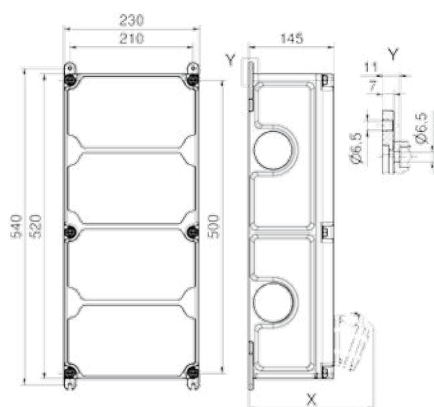

depth x in (mm)	IP44
with	
OTC operating window	180
schuko-type	162
CEE 16A 3p	200
CEE 16A 4p	204
CEE 16A 5p	207
CEE 32A 3p/4p	211
CEE 32A 5p	213
CEE 63A 3p/4p/5p	229

- Dimension of enclosure: 520 x 230 mm
- Housing made of high-grade, impact-resistant plastic
- Hinged enclosure cover
- Top and bottom can be sealed together
- With external and internal fastening
- User-friendly OTC operating window
- Permanently attached cover screws
- Coded flange plate system for maximum safety during initial installation and maintenance
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)
- Accessories: see page 136

VARIABOX -XL



Order no. **89146**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 2 CEE sockets 32A, 400V, 5p

Fuse:

- 2 Neozed D01, 1p
- 2 Neozed D02, 3p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XL



Order no. **89107**

Components:

- 3 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 2 CEE sockets 32A, 400V, 5p

Fuse:

- 3 C-type MCBs 16A, 1p
- 2 C-type MCBs 32A, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XL



Order no. **89094**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 2 Neozed D01, 1p
- 1 Neozed D01, 3p
- 1 Neozed D02, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XL



Order no. **89099**

Components:

- 3 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 3 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 C-type MCB 32A, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XL



Order no. **89101**

Components:

- 4 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 4 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 C-type MCB 32A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XL



Order no. **89095**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p
- 1 CEE socket 63A, 400V, 5p


Fuse:

- 2 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 C-type MCB 32A, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

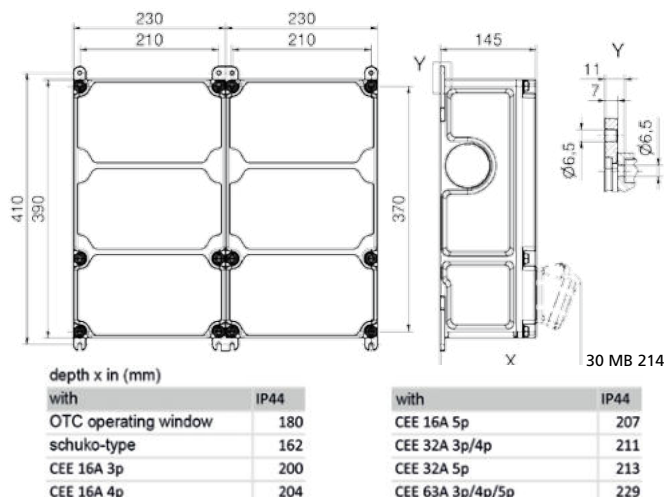

- Dimension of enclosure: 390 x 460 mm
- Housing made of high-grade, impact-resistant plastic
- Hinged enclosure cover
- Top and bottom can be sealed together
- With external and internal fastening
- User-friendly OTC operating window
- Permanently attached cover screws
- Coded flange plate system for maximum safety during initial installation and maintenance
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)
- Accessories: see page 136

VARIABOX -L DUO



Order no. **89128**

Components:

4 domestic sockets 16A, 230V ~
(system F - German earthing System)
3 CEE sockets 16A, 400V, 5p

Fuse:

4 Neozed D01, 1p
3 Neozed D01, 3p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L DUO



Order no. **89129**

Components:

4 domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 230V, 3p
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

5 Neozed D01, 1p
1 Neozed D01, 3p
1 Neozed D02, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L DUO



Order no. **89134**

Components:

4 domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

4 Neozed D01, 1p
2 Neozed D01, 3p
1 Neozed D02, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L DUO



Order no. **890083**

Components:

4 domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p
1 double data socket RJ45 CAT6 IP55

Fuse:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 C-type MCB 63A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L DUO



Order no. **89148**

Components:

6 domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

3 Neozed D01, 1p
1 Neozed D01, 3p
1 Neozed D02, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L DUO



Order no. **89987**

Components:

10 domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p


Fuse:

10 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

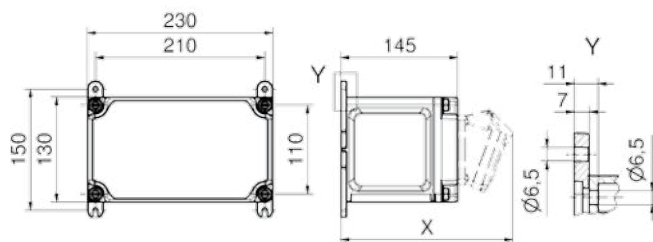

depth x in (mm)

with	IP67
OTC operating window	180
schuko-type	205
CEE 16A 3p	200
CEE 16A 4p	202

30 MB 208

with	IP67
CEE 16A 5p	205
CEE 32A 3p/4p	213
CEE 32A 5p	214
CEE 63A 3p/4p/5p	231

- Dimension of enclosure: 130 x 230 mm
- Housing made of high-grade, impact-resistant plastic
- Top and bottom can be sealed together
- With external and internal fastening
- Permanently attached cover screws
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)
- Accessories: see page 136

VARIABOX -S IP67

Order no. **890919**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M25

Connection option:
for 1 cable up to 3 x 4 mm²



VARIABOX -S IP67

Order no. **890920**


Components:

1 domestic socket 16A, 230V
(system F - German earthing System)

1 CEE socket 16A, 400V, 5p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M25

Connection option:
for 1 cable up to 5 x 4 mm²

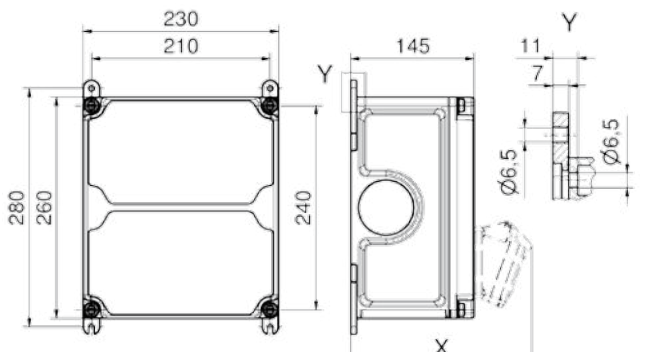

depth x in (mm)

with	IP67
OTC operating window	180
schuko-type	205
CEE 16A 3p	200
CEE 16A 4p	202

30 MB 207

with	IP67
CEE 16A 5p	205
CEE 32A 3p/4p	213
CEE 32A 5p	214
CEE 63A 3p/4p/5p	231

- Dimension of enclosure: 260 x 230 mm
- Housing made of high-grade, impact-resistant plastic
- Hinged enclosure cover
- Top and bottom can be sealed together
- With external and internal fastening
- User-friendly OTC operating window
- Permanently attached cover screws
- Coded flange plate system for maximum safety during initial installation and maintenance
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)
- Accessories: see page 136

VARIABOX -M IP67

Order no. **890921**

Components:

1 domestic socket 16A, 230V
(system F - German earthing System)

1 CEE socket 16A, 400V, 5p

Fuse:

1 C-type MCB 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



VARIABOX -M IP67

Order no. **890922**

Components:

1 domestic socket 16A, 230V
(system F - German earthing System)

1 CEE socket 32A, 400V, 5p

Fuse:


1 C-type MCB 16A, 1p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

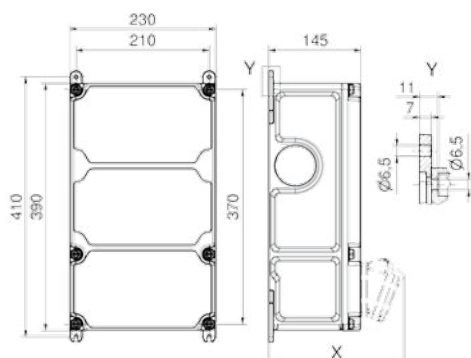

depth x in (mm)

with	IP67	with	IP67
OTC operating window	180	CEE 16A 5p	205
schuko-type	205	CEE 32A 3p/4p	213
CEE 16A 3p	200	CEE 32A 5p	214
CEE 16A 4p	202	CEE 63A 3p/4p/5p	231

30 MB 206

- Dimension of enclosure: 390 x 230 mm
- Housing made of high-grade, impact-resistant plastic
- Hinged enclosure cover
- Top and bottom can be sealed together
- With external and internal fastening
- User-friendly OTC operating window
- Permanently attached cover screws
- Coded flange plate system for maximum safety during initial installation and maintenance
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)
- Accessories: see page 136

VARIABOX -L IP67



Order no. **890923**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 2 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L IP67



Order no. **890924**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 2 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 C-type MCB 32A, 3p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L IP67



Order no. **890925**

Components:

- 3 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p

Fuse:

- 3 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L IP67



Order no. **890926**

Components:

- 3 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 3 C-type MCBs 16A, 1p
- 1 C-type MCB 32A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L IP67



Order no. **890927**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 2 CEE sockets 16A, 400V, 5p

Fuse:

- 2 C-type MCBs 16A, 1p
- 2 C-type MCBs 16A, 3p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -L IP67



Order no. **890928**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 2 CEE sockets 32A, 400V, 5p


Fuse:

- 2 C-type MCBs 16A, 1p
- 2 C-type MCBs 32A, 3p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

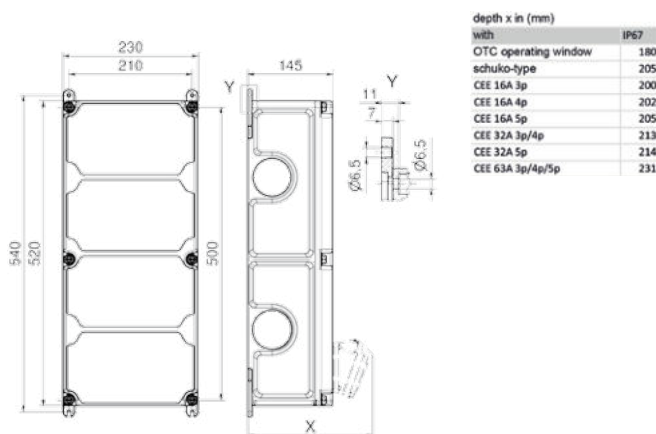

30 MB 205

- Dimension of enclosure: 520 x 230 mm
- Housing made of high-grade, impact-resistant plastic
- Hinged enclosure cover
- Top and bottom can be sealed together
- With external and internal fastening
- User-friendly OTC operating window
- Permanently attached cover screws
- Coded flange plate system for maximum safety during initial installation and maintenance
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)
- Accessories: see page 136

VARIABOX -XL IP67



Order no. **890929**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 2 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 C-type MCB 32A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XL IP67



Order no. **890930**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 2 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 C-type MCB 32A, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XL IP67



Order no. **890931**

Components:

- 3 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 3 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 C-type MCB 32A, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XL IP67



Order no. **890932**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 2 CEE sockets 16A, 400V, 5p

Fuse:

- 2 C-type MCBs 16A, 1p
- 2 C-type MCBs 16A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XL IP67



Order no. **890933**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 2 CEE sockets 32A, 400V, 5p

Fuse:

- 2 C-type MCBs 16A, 1p
- 2 C-type MCBs 32A, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XL IP67



Order no. **890934**

Components:

- 3 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 2 CEE sockets 16A, 400V, 5p


Fuse:

- 3 C-type MCBs 16A, 1p
- 2 C-type MCBs 16A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

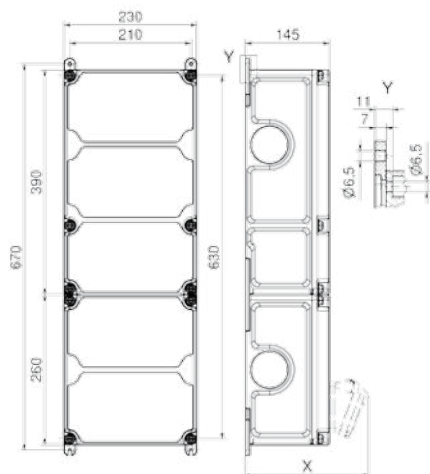

depth x in (mm)	
with	IP67
OTC operating window	180
schuko-type	205
CEE 16A 3p	200
CEE 16A 4p	202
CEE 16A 5p	205
CEE 32A 3p/4p	213
CEE 32A 5p	214
CEE 63A 3p/4p/5p	231

30 MB 204

- Dimension of enclosure: 650 x 230 mm
- Housing made of high-grade, impact-resistant plastic
- Hinged enclosure cover
- Top and bottom can be sealed together
- With external and internal fastening
- User-friendly OTC operating window
- Permanently attached cover screws
- Coded flange plate system for maximum safety during initial installation and maintenance
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)

VARIABOX -XXL IP67



Order no. **890935**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)

1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XXL IP67



Order no. **890936**

Components:

3 domestic sockets 16A, 230V ~
(system F - German earthing System)

2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XXL IP67



Order no. **890937**

Components:

3 domestic sockets 16A, 230V ~
(system F - German earthing System)

1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XXL IP67



Order no. **890938**

Components:

3 domestic sockets 16A, 230V ~
(system F - German earthing System)

1 CEE socket 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Fuse:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
2 C-type MCBs 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XXL IP67



Order no. **890939**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)

2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Fuse:

1 C-type MCB 16A, 1p
2 C-type MCBs 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

VARIABOX -XXL IP67



Order no. **890940**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)

1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p


Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 C-type MCB 63A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 1x M12, 1x M20, 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²

- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

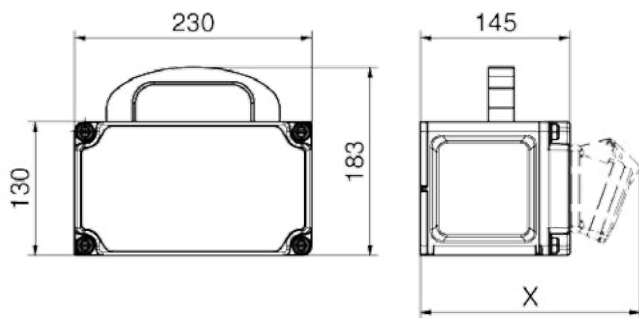

depth x in (mm)

with	IP44
OTC operating window	180
schuko-type	162
CEE 16A 3p	200
CEE 16A 4p	204

30 MB 213

with	IP44
CEE 16A 5p	207
CEE 32A 3p/4p	211
CEE 32A 5p	213
CEE 63A 3p/4p/5p	229

- Dimension of enclosure: 130 x 230 mm
- With high quality handle
- Housing made of high-grade, impact-resistant plastic
- Top and bottom can be sealed together
- Permanently attached cover screws
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)

VARIABOX -S Mobil

Order no. **85000**

Components:

3 domestic sockets 16A, 230V ~
(system F - German earthing System)

Cable entry:

Domestic plug 16A, 230V
with 2 m lead H07RN-F3G2,5



VARIABOX -S Mobil

Order no. **85006**


Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)

1 CEE socket 16A, 400V, 5p

Cable entry:

CEE plug 16A, 400V, 5p with
2 m cable H07RN-F5G2,5

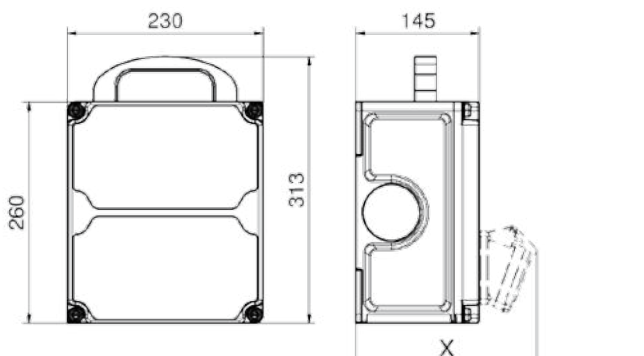

depth x in (mm)

with	IP44
OTC operating window	180
schuko-type	162
CEE 16A 3p	200
CEE 16A 4p	204

30 MB 212

with	IP44
CEE 16A 5p	207
CEE 32A 3p/4p	211
CEE 32A 5p	213
CEE 63A 3p/4p/5p	229

- Dimension of enclosure: 260 x 230 mm
- With high quality handle
- Housing made of high-grade, impact-resistant plastic
- Top and bottom can be sealed together
- User-friendly OTC operating window
- Permanently attached cover screws
- Coded flange plate system for maximum safety during initial installation and maintenance
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)

VARIABOX -M Mobil

Order no. **85007**

Components:

2 domestic sockets 16A, 230V ~
(system F - German earthing System)

1 CEE socket 16A, 400V, 5p

Fuse:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry:

CEE plug 32A, 400V, 5p with
2 m cable H07RN-F5G4



VARIABOX -M Mobil

Order no. **85002**

Components:

3 domestic sockets 16A, 230V ~
(system F - German earthing System)


2 CEE sockets 16A, 400V, 5p

Cable entry:

CEE plug 16A, 400V, 5p with
2 m cable H07RN-F5G2,5



- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

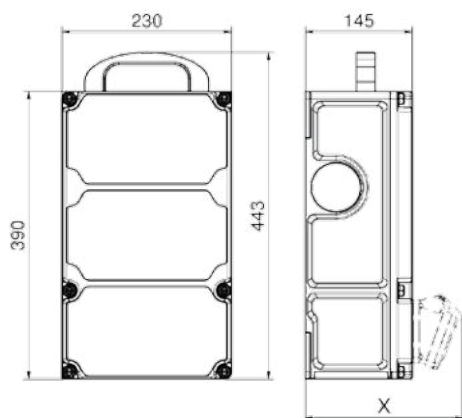

depth x in (mm)	
with	IP44
OTC operating window	180
schuko-type	162
CEE 16A 3p	200
CEE 16A 4p	204
CEE 16A 5p	207
CEE 32A 3p/4p	211
CEE 32A 5p	213
CEE 63A 3p/4p/5p	229

30 MB 211

- Dimension of enclosure: 390 x 230 mm
- With high quality handle
- Housing made of high-grade, impact-resistant plastic
- Top and bottom can be sealed together
- User-friendly OTC operating window
- Permanently attached cover screws
- Coded flange plate system for maximum safety during initial installation and maintenance
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Colours: bottom - black, top - electro-grey (enclosure top optionally available in the colours yellow, red, blue or silver)

VARIABOX-L Mobile



Order no. **85008**

Components:

- 2 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 2 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry:

- CEE plug 32A, 400V, 5p with 2 m cable H07RN-F5G6

VARIABOX-L Mobile



Order no. **85036**

Components:

- 6 domestic sockets 16A, 230V ~ (system F - German earthing System)

Fuse:

- 6 C-type MCBs 16A, 1p
- 1 RCCB 40/0.03A, 4p

Cable entry:

- CEE plug 32A, 400V, 5p with 2 m cable H07RN-F5G4

VARIABOX-L Mobile



Order no. **85009**

Components:

- 3 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 3 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry:

- CEE plug 32A, 400V, 5p with 2 m cable H07RN-F5G6

VARIABOX-L Mobile



Order no. **85016**

Components:

- 3 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p

Fuse:

- 3 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry:

- CEE plug 32A, 400V, 5p with 2 m cable H07RN-F5G4

VARIABOX-L Mobile



Order no. **85034**

Components:

- 4 domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Fuse:

- 4 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 RCCB 40/0.03A, 4p

Cable entry:

- CEE plug 32A, 400V, 5p with 2 m cable H07RN-F5G6

VARIABOX-L Mobile



Order no. **85005**

Components:

- 6 domestic sockets 16A, 230V ~ (system F - German earthing System)


Fuse:

- 1 RCCB 40/0.03A, 4p

Cable entry:

- CEE plug 16A, 400V, 5p with 2 m cable H07RN-F5G2,5

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

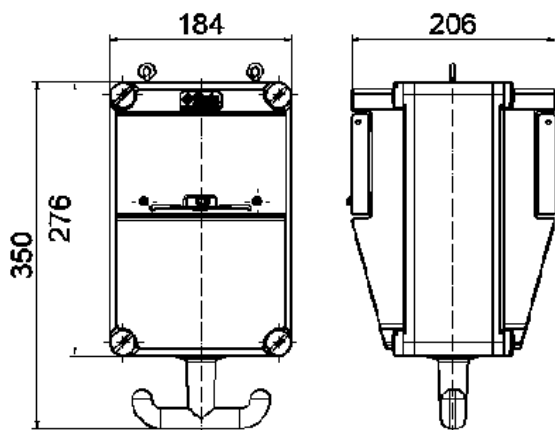

30MB186

- Dimension of enclosure: 2 x 276 x 184 mm
- Enclosure made of high-grade, impact-resistant plastic
- Hinged window can be locked and lead-sealed
- 9 modules can be installed on each enclosure side
- Hinged lid
- Grip hooks in signal yellow



Order no. **572567**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry:

1x M40

Connection option:

for 1 cable up to 5 x 10 mm²



Order no. **574339**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Cable entry:

1x M40

Connection option:

for 1 cable up to 5 x 10 mm²



Order no. **573671**

Components:

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:

6 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry:

1x M32

Connection option:

for 1 cable up to 5 x 16 mm²



Order no. **572551**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:

4 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry:

1x M32

Connection option:

for 1 cable up to 5 x 25 mm²



Order no. **572185**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry:

1x M32

Connection option:

for 1 cable up to 5 x 10 mm²



Order no. **574420**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 compressed air connection:
(inlet: 1/2" pipe with external thread;
outlet: 1/2" quick-release connector)

Protection:

2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p


Cable entry:

1x M32

Connection option:


for 1 cable up to 5 x 10 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

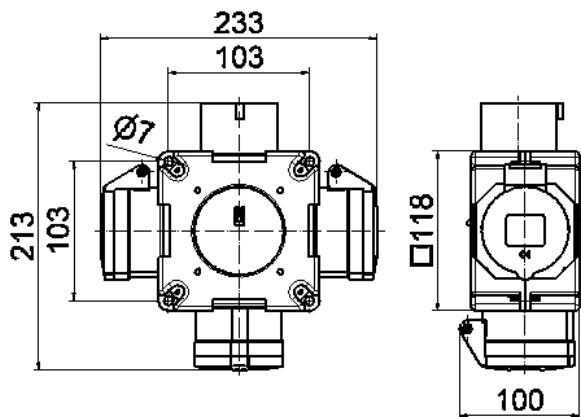

30MB061

- Dimension of enclosure: 118 x 118 mm
- Ready wired for installation
- Enclosure made of high-grade, impact-resistant plastic
- Small, compact design
- Variable configuration
- Hanging bracket made of V2A stainless steel

Order no. **54655****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 230V, 3p

Cable entry/Input::

1 CEE inlet 16A, 230V, 3p

Order no. **54657****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Cable entry/Input::

1 CEE plug 16A, 400V, 5p with
1.5 m cable H07RN-F5G2,5

Order no. **54880****Components:**

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Cable entry/Input::

1x M25

Connection option:

for 1 cable up to 5x 2.5 mm²

Order no. **54568****Components:**

3 CEE sockets 16A, 230V, 3p

Cable entry/Input::

1 CEE plug 16A, 230V, 3p with
1.5 m cable H07RN-F3G2,5

Order no. **54566****Components:**

3 CEE sockets 16A, 230V, 3p

Cable entry/Input::

1 CEE inlet 16A, 230V, 3p


Order no. **54569****Components:**

3 CEE sockets 16A, 400V, 5p

Cable entry/Input::

1 CEE plug 16A, 400V, 5p with
1.5 m cable H07RN-F5G2,5

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing



Order no. **546**

Components:
3 CEE sockets 16A, 400V, 5p

Cable entry/Input::
1 CEE inlet 16A, 400V, 5p



Order no. **54567**

Components:
3 CEE sockets 32A, 400V, 5p

Cable entry/Input::
1 CEE inlet 32A, 400V, 5p



Order no. **54740**

Components:
2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Cable entry/Input::
1x M25

Connection option:
for 1 cable up to 5x 2.5 mm²



Order no. **54929**

Components:
4 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Cable entry/Input::
1x M25

Connection option:
for 1 cable up to 5x 2.5 mm²



Order no. **540055**

Components:
1 Domestic socket 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Cable entry/Input::
1x M25

Connection option:
for 1 cable up to 5x 2.5 mm²




Order no. **54741**

Components:
3 CEE sockets 16A, 230V, 3p

Cable entry/Input::
1x M25

Connection option:
for 1 cable up to 5x 2.5 mm²



Order no. **54580**

Components:
2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Cable entry/Input::
1 CEE inlet 16A, 400V, 5p



Order no. **54801**

Components:
3 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Cable entry/Input::
1x M25

Connection option:
for 1 cable up to 5x 2.5 mm²

Cable Gland

- Black
- Protection degree IP67



	Thread	Sealing range	Order no.
	M12	3-6 mm	580647
	M20	8-13 mm	580648
	M25	11-17 mm	580649
	M32	15-21 mm	580650
	M40	19-28 mm	580651
Multiple sealing insert	for M25	2x8 mm	580652
	for M32	4x8 mm	580653

Cable Gland with Pressure Equalisation

The use of pressure equalisation cable glands allows the internal pressure to adjust to the ambient pressure. The type-tested protection degree of the enclosure is fully retained. Temperature fluctuations, intense sunlight, or a sudden change in weather can cause condensation to form in combination enclosures. Basically, condensation can form in all sealed combination enclosures. The higher the protection degree is, the more likely the formation of condensation will be. We therefore recommend, especially in the case of distributors with protection degree IP67, the use of pressure equalisation cable glands.



- Minimised condensation formation and therefore reduction in downtimes and time-consuming and expensive repair work
- No expensive and high-maintenance ventilation technology required
- No drip holes which reduce the level of protection
- With air ducts for pressure equalisation
- black
- Protection degree IP67

	Thread	Sealing range	Order no.
	M20	6-13 mm	580656
	M25	9-17 mm	580657
	M32	13-21 mm	580658
	M40	16-28 mm	580659

Mounting Set



- For VARIABOX S - XL
- Consisting of:
4 screws 6 x 60 mm
4 screw anchors 8 x 51 mm

Order no. **580640**

- For VARIABOX XXL
- Consisting of:
6 screws 6 x 60 mm
6 screw anchors 8 x 51 mm

Order no. **580727**

Lock Set



- For OTC window
- With long shackle and 2 keys

Order no. **580642**

Portable Stand



- For VARIABOX M, L, XL
- Hot-dip galvanised steel tubing
- Folding
- Weight 4 kg
- Dimensions: 350/570 x 780 x 540 mm (W x H x D)

Order no. **580643**

Surface Mounting Socket Outlets Unit



- For VARIABOX M and L
- Colour yellow, RAL 1023

Order no. **580641**



We live in a fast-moving age. It is also frequently necessary to make modifications to power distribution systems. Power distributors used in industrial buildings, production facilities, laboratories, harbour docks, markets, tunnel, road construction sites and many other locations therefore frequently need to be adapted and are subject to very rough treatment.

The MODBOX® is the ideal solution. The new patented MODBOX® rubber distributor series from Bals Elektrotechnik GmbH combines all the demands placed on current distributors up to a maximum protection degree of IP67. As far as impact resistance is concerned, the MODBOX® leaves no wish unfulfilled.

The material properties of the MODBOX® are unique: its robustness and resistance to ageing, temperature, oil and acid are unbeatable. The MODBOX® is, of course, also fully insulated, UV-resistant and halogen-free as well as flame-resistant and self-extinguishing.

The truly innovative enclosure design allows existing installations to be adapted quickly. Order separation attachments are provided in the enclosure. This makes it easier to install strong-current and weak-current systems.

An outstanding feature is that MODBOX® units can be easily connected next to each as modules without any modifications needing to be made to the basic installation. The MODBOX® is freely configurable. Four openings in the side of the MODBOX® allow modules to be added in any direction. Another new feature are the yellow connecting and end corners. To further improve safety, the luminous end corners (luminescence time up to 7 hours) are recommended.



Configure your own MODBOX® at www.bals.com



User-friendly OTC operating window on MODBOX®-Midi.



Continuous all-round seals provide IP67 protection level



Solid guide rails ensure an extremely high level of dimensional stability, especially at connection between upper and lower part of enclosure


Corners (luminous on request) Standard end corners in yellow, interchangeable (2 or 4). They allow MODBOX® units to be connected together without problem.

Slot and recess

Slot with ring set sealed to achieve the high IP protection level. Wedge-shape rubber teeth for increased stability.

Recess in base

Recess provided for order separation if required (strong current and weak current).

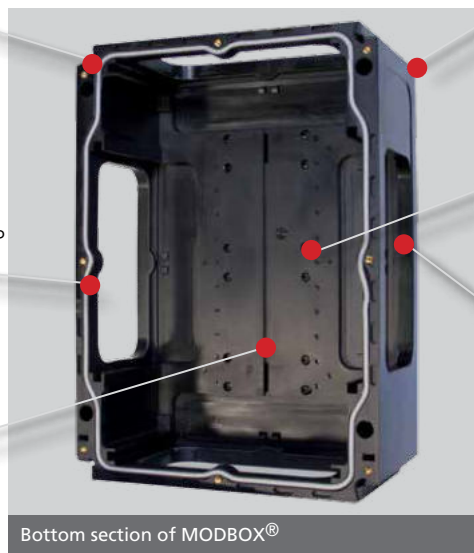

Bottom section of MODBOX®

Drill holes

4 drill holes ensure a perfect permanent installation.


Cutouts

4 cutouts for attaching the wall mounting anchors.

Feedthrough openings

4 openings in the MODBOX® wall facilitate modular expansion of the installation in every direction. The slide-in connector was developed to ensure perfect connection. The frame, inserted if additional modules are added, ensures additional stability. In the standard configuration, the feedthrough openings are sealed off using blanking panels.

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

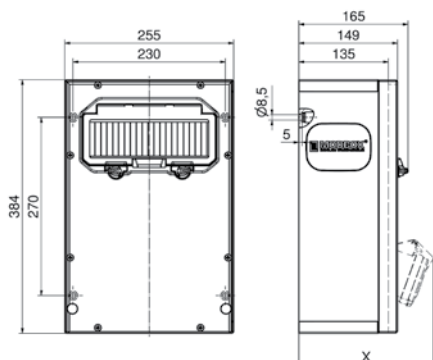

depth x in (mm)

with	IP44	IP67	with	IP44	IP67
OTC operating window	165	165	CEE 16A 5p	197	195
schuko-type	152	195	CEE 32A 3p/4p	201	203
CEE 16A 3p	190	190	CEE 32A 5p	203	204
CEE 16A 4p	194	192	CEE 63A 3p/4p/5p	219	221

30 MB 218

- Dimension of enclosure: 384 x 255 mm
- Enclosure made of high-quality, impact-resistant solid rubber
- User-friendly OTC operating window
- Modular extension
- Hardness grade of 99 shore
- Resistant to ageing, temperature, oil and acid
- Excellent resistance to chemicals
- Flame-resistant, self-extinguishing
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Black top and bottom section with yellow end corners
- Available in various RAL colours
- Accessories: see page 156

MODBOX[®]-Midi

 Order no. **5401882**
Components:

 3 Domestic sockets 16A, 230V ~
 (system F - German earthing System)

Protection:

 3 C-type MCBs 16A, 1p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²

MODBOX[®]-Midi

 Order no. **5401884**
Components:

 6 Domestic sockets 16A, 230V ~
 (system F - German earthing System)

Protection:

 6 C-type MCBs 16A, 1p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²

MODBOX[®]-Midi

 Order no. **5401886**
Components:

 2 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p

Protection:

 2 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²

MODBOX[®]-Midi

 Order no. **5401892**
Components:

 2 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Protection:

 2 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²

MODBOX[®]-Midi

 Order no. **5401894**
Components:

 3 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 2 CEE sockets 16A, 400V, 5p

Protection:

 3 C-type MCBs 16A, 1p
 2 C-type MCBs 16A, 3p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²

MODBOX[®]-Midi

 Order no. **5401905**
Components:

 3 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p


Protection:

 3 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 C-type MCB 32A, 3p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²


- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

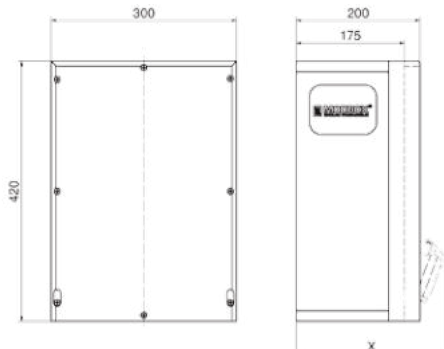

depth x in (mm)

with	IP44	IP67	with	IP44	IP67
schuko-type	192	235	CEE 32A 3p/4p	241	243
CEE 16A 3p	230	230	CEE 32A 5p	243	244
CEE 16A 4p	234	232	CEE 63A 3p/4p/5p	259	261
CEE 16A 5p	237	235			

13MB109

- Dimension of enclosure: 420 x 300 mm
- Ready wired for installation
- Enclosure made of high-quality, impact-resistant solid rubber
- Modular extension
- Hardness grade of 99 shore
- Resistant to ageing, temperature, oil and acid
- Excellent resistance to chemicals
- Flame-resistant, self-extinguishing
- Top section straight, CEE sockets angled
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology
- Black top and bottom section with yellow end corners
- Available in various RAL colours
- Accessories: see page 156


 Order no. **5401455**
Components:

3 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 2 CEE sockets 16A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
 2 C-type MCBs 16A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²


 Order no. **5401567**
Components:

3 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 2 CEE sockets 32A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
 2 C-type MCBs 32A, 3p
 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²


 Order no. **5401343**
Components:

3 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 C-type MCB 32A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 16 mm²


 Order no. **5401668**
Components:

3 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Protection:

3 Neozed D01, 1p
 1 Neozed D01, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²


 Order no. **5401662**
Components:

3 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Protection:

3 Neozed D01, 1p
 1 Neozed D01, 3p
 1 Neozed D02, 3p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²


 Order no. **5402044**
Components:

2 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 2 CEE sockets 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
 2 C-type MCBs 32A, 3p
 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:
 for 2 cables up to 5 x 25 mm²



- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing



Order no. **5401302**

Components:

2 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 C-type MCB 32A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402046**

Components:

3 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 230V, 3p
 1 CEE socket 16A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 1p
 1 C-type MCB 16A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5401453**

Components:

4 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 C-type MCB 32A, 3p
 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5401801**

Components:

4 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 C-type MCB 32A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402047**

Components:

4 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 C-type MCB 32A, 3p

Cable entry at top and bottom:
 each with 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5401274**

Components:

2 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 C-type MCB 32A, 3p
 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402059**

Components:

2 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p
 1 double data socket RJ45 CAT6 IP55

Protection:

2 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 C-type MCB 32A, 3p
 1 RCCB 40/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M20, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402060**

Components:

3 Domestic sockets 16A, 230V ~
 (system F - German earthing System)
 1 CEE socket 16A, 400V, 5p
 1 CEE socket 32A, 400V, 5p
 1 double data socket RJ45 CAT6 IP55

Protection:

3 C-type MCBs 16A, 1p
 1 C-type MCB 16A, 3p
 1 C-type MCB 32A, 3p
 1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
 each with 2x M20, 2x M40

Connection option:

for 2 cables up to 5 x 16 mm²



- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing



Order no. **5402159**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:

4 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry at bottom:

1x M12, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402160**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at bottom:

1x M12, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402161**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at bottom:

1x M12, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402162**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at bottom:

1x M12, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402163**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at bottom:

1x M12, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402164**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
2 C-type MCBs 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at bottom:

1x M12, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402165**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at bottom:

1x M12, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **5402166**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p


Cable entry at bottom:

1x M12, 2x M40

Connection option:

for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

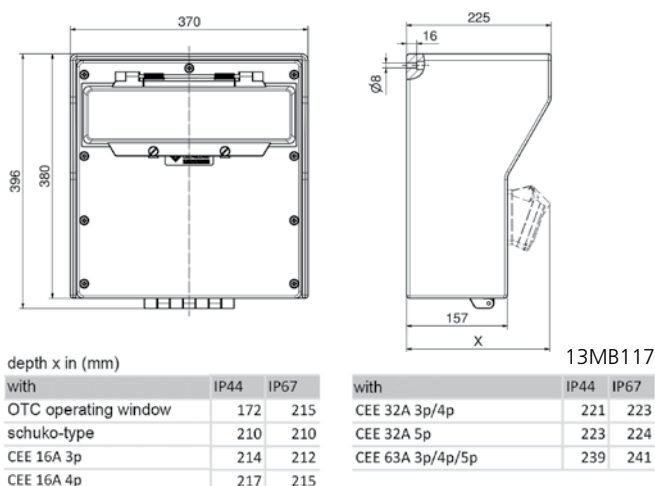

- Dimension of enclosure: 380 x 370 mm
- Enclosure made of high-quality, impact-resistant solid rubber
- Space for up to 18 modules under operating window
- Hardness grade of 97 shore
- Hinged lid
- Resistant to ageing, temperature, oil and acid
- Flame-resistant, self-extinguishing
- All CEE sockets with screwless, maintenance-free QUICK-CONNECT technology



Order no. **5402049**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Order no. **5402050**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 C-type MCB 32A, 3p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Order no. **5402051**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 Neozed D02, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Order no. **5402052**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Order no. **5402053**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p

Cable entry at top and bottom:
each with 2x M40

Connection option:
for 2 cables up to 5 x 25 mm²



Order no. **5402054**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p


Protection:

2 Neozed D01, 1p
1 Neozed D01, 3p
2 Neozed D02, 3p

Cable entry at top and bottom:
each with 2x M50

Connection option:
for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

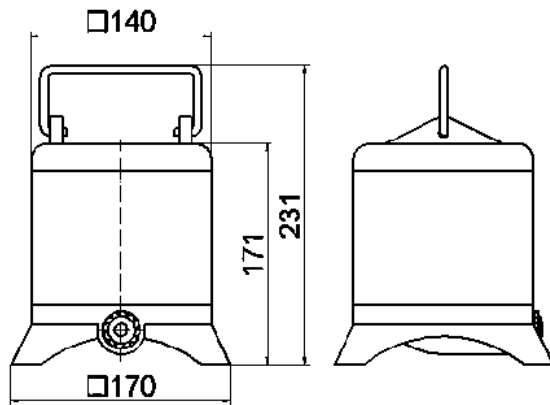

13MB052

- Dimension of enclosure: 140 x 140 mm
- Enclosure made of high-quality, impact-resistant solid rubber
- Small, compact design
- Top and bottom in signal yellow
- Handle made of stainless steel

Order no. **57275****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

1 RCCB 25/0.03A, 2p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G1,5

Order no. **57148****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

Order no. **57623****Components:**

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Cable entry/Input::

Domestic plug 16A, 230V, 3p
4 m cable H07RN-F3G2,5

Order no. **57996****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 rotary field measuring device

Protection:

1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE phase inverter 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

Order no. **57255****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5


Order no. **57143****Components:**

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

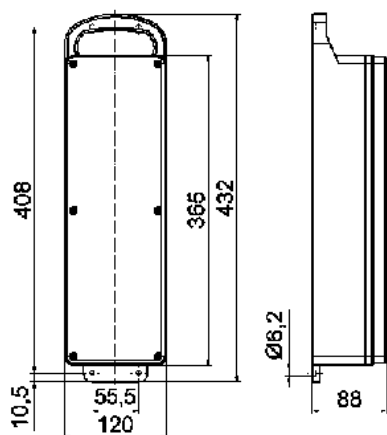

13MB007

- Dimension of enclosure: 365 x 120 mm
- Enclosure made of high-quality, impact-resistant solid rubber
- Ideally suited to tough, harsh and difficult conditions
- Convenient and compact design
- With moulded carrying handle

Order no. **530179****Components:**

- 1 Domestic socket 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Protection:

- 1 C-type MCB 16A, 1p
- 1 C-type MCB 16A, 3p

Cable entry/Input::

CEE plug 32A, 400V, 5p with lead 1.8 m H07RN-F5G4

Order no. **5310****Components:**

- 3 CEE sockets 16A, 400V, 5p

Cable entry/Input::

CEE plug 16A, 400V, 5p with lead 1.8 m H07RN-F5G2,5

Order no. **53141****Components:**

- 4 Domestic sockets 16A, 230V ~ (system F - German earthing System)

Protection:

- 1 RCCB 25/0.03A, 2p

Cable entry/Input::

Domestic plug 16A, 230V, 3p with 2 m lead H07RN-F3G2,5

Order no. **53525****Components:**

- 3 CEE sockets 32A, 400V, 5p

Cable entry/Input::

CEE plug 32A, 400V, 5p with lead 2 m H07RN-F5G4

Order no. **53420****Components:**

- 2 CEE sockets 16A, 400V, 5p

Protection:

- 2 C-type MCBs 16A, 3p

Cable entry/Input::

CEE plug 32A, 400V, 5p with lead 2 m H07RN-F5G6

Order no. **53290****Components:**

- 4 Domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p

Cable entry/Input::

CEE plug 16A, 400V, 5p with lead 2 m H07RN-F5G2,5

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing



Order no. **530003**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5



Order no. **530**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 1.8 m H07RN-F5G2,5



Order no. **5311**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 1.8 m H07RN-F5G2,5




Order no. **5350**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Cable entry/Input::

Domestic plug 16A, 230V, 3p
with 2 m cable H07RN-F3G2,5

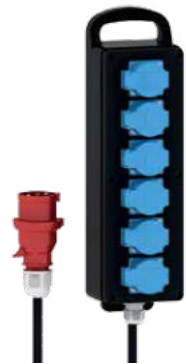

Order no. **53247**

Components:

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5



Order no. **53213**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:

1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5



Order no. **5321**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:

1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5



Order no. **530321**

Components:

3 CEE sockets 16A, 400V, 5p


Protection:

1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

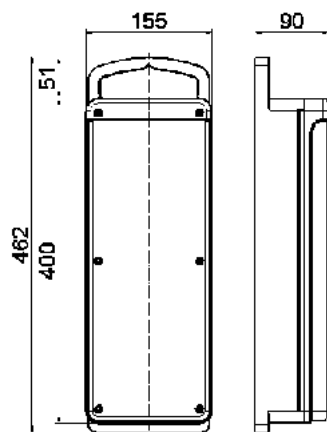

13MB054

- Dimension of enclosure: 400 x 150 mm
- Enclosure made of high-quality, impact-resistant solid rubber
- Ideally suited to tough, harsh and difficult conditions
- Convenient and compact design
- With moulded carrying handle

Order no. **53909****Components:**

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/Input:

CEE plug 32A, 400V, 5p with
lead 2 m H07RN-F5G4

Order no. **53681****Components:**

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

1 RCCB 40/0.03A, 4p

Cable entry/Input:


CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

Order no. **53679****Components:**

12 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Cable entry/Input:

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

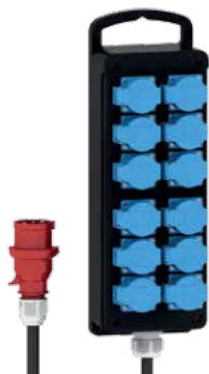Order no. **530090****Components:**

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 32A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/Input:

CEE plug 32A, 400V, 5p with
lead 2 m H07RN-F5G4

Order no. **530425****Components:**

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/Input:

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5

Order no. **530426****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:


2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p

Cable entry/Input:

CEE plug 32A, 400V, 5p with
lead 2 m H07RN-F5G4



- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

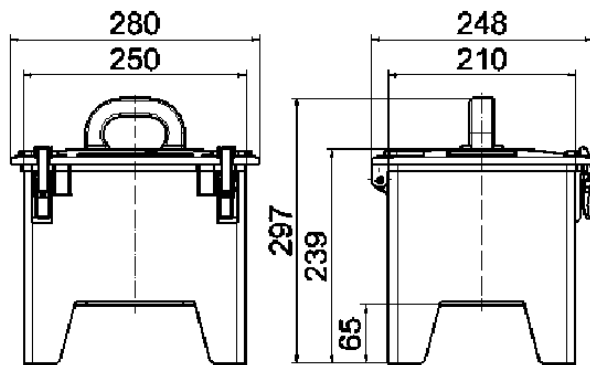

13MB043

- Dimension of enclosure: 250 x 210 mm
- Enclosure made of high-quality, impact-resistant solid rubber
- Ideally suited to tough, harsh and difficult conditions
- Robust solid-rubber handle with hook for cable
- Lockable stainless-steel quick-release fasteners
- Hinged lid, user-friendly access to protective equipment
- Stackable, foot attachment on enclosure cover
- High rubber feet to avoid dirt at floor level



Order no. **5226**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

2 Neozed D01, 1p
2 Neozed D01, 3p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **522590**

Components:

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 rotary field measuring device

Protection:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE phase inverter 32A, 400V, 5p



Order no. **5201558**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **5201047**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **522144**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Protection:

1 Neozed D01, 1p
1 Neozed D01, 3p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **5201015**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 32A, 400V, 5p with
lead 2 m H07RN-F5G4

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing



Order no. **5201926**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 32A, 400V, 5p with
3 m cable H07RN-F5G6



Order no. **5202236**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **5200568**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
3 CEE sockets 32A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **524449**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **5225**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Cable entry/Input::

CEE inlet 16A, 400V, 5p



Order no. **5201004**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **5200917**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **5202237**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 32A, 400V, 5p with
lead 3 m H07RN-F5G4



- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing



Order no. **526**

Components:

5 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Cable entry/Input::

CEE inlet 16A, 400V, 5p



Order no. **5202238**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **522143**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

3 Neozed D01, 1p
1 Neozed D01, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **52638**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Protection:

1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 16A, 400V, 5p with
lead 2 m H07RN-F5G2,5



Order no. **5201555**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **52480**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Protection:

1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 16A, 400V, 5p



Order no. **522589**

Components:

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 rotary field measuring device

Protection:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE phase inverter 16A, 400V, 5p



Order no. **523291**

Components:

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:


6 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 32A, 400V, 5p with
lead 3 m H07RN-F5G4



- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

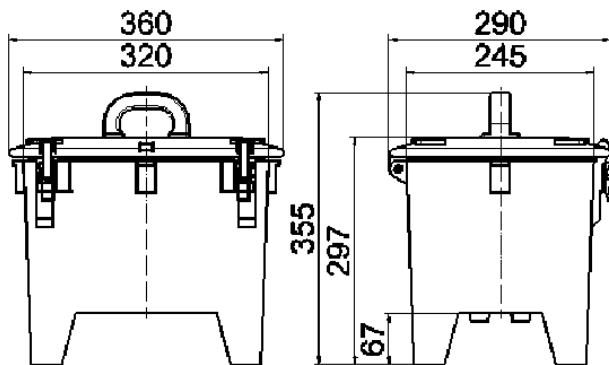

13MB036

- Dimension of enclosure: 320 x 245 mm
- Enclosure made of high-quality, impact-resistant solid rubber
- Ideally suited to tough, harsh and difficult conditions
- Robust solid-rubber handle with hook for cable
- Lockable stainless-steel quick-release fasteners
- Hinged lid, user-friendly access to protective equipment
- Stackable, foot attachment on enclosure cover
- High rubber feet to avoid dirt at floor level



Order no. **5202239**

Components:

- 4 Domestic sockets 16A, 230V ~ (system F - German earthing System)
- 2 CEE sockets 16A, 400V, 5p
- 2 CEE sockets 32A, 400V, 5p

Protection:

- 4 C-type MCBs 16A, 1p
- 2 C-type MCBs 16A, 3p
- 2 C-type MCBs 32A, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry/Input::

CEE plug 63A, 400V, 5p with lead 2 m H07RN-F5G10



Order no. **5202240**

Components:

- 4 Domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p
- 1 CEE socket 63A, 400V, 5p

Protection:

- 2 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 C-type MCB 32A, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry/Input::

CEE plug 63A, 400V, 5p with lead 3 m H07RN-F5G10



Order no. **524443**

Components:

- 4 Domestic sockets 16A, 230V ~ (system F - German earthing System)
- 3 CEE sockets 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Protection:

- 2 Neozed D01, 1p
- 3 Neozed D01, 3p

Cable entry/Input::

CEE plug 32A, 400V, 5p with lead 3 m H07RN-F5G4



Order no. **522167**

Components:

- 4 Domestic sockets 16A, 230V ~ (system F - German earthing System)
- 3 CEE sockets 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Protection:

- 2 Neozed D01, 1p
- 3 Neozed D01, 3p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **521828**

Components:

- 4 Domestic sockets 16A, 230V ~ (system F - German earthing System)
- 4 CEE sockets 32A, 400V, 5p

Protection:

- 4 Neozed D01, 1p
- 1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **5202241**

Components:

- 4 Domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p
- 1 CEE socket 63A, 400V, 5p

Protection:

- 2 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 C-type MCB 32A, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry/Input::

CEE inlet 63A, 400V, 5p



- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing



Order no. **524446**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

2 Neozed D01, 1p
1 Neozed D01, 3p
1 Neozed D02, 3p
1 RCCB 63/0.03A, 4p

Cable entry/Input::

CEE plug 63A, 400V, 5p with
lead 3 m H07RN-F5G10



Order no. **5202242**

Components:

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

6 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/Input::

CEE plug 63A, 400V, 5p with
lead 2 m H07RN-F5G16



Order no. **5202469**

Components:

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

6 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/Input::

CEE inlet 63A, 400V, 5p



Order no. **5202243**

Components:

8 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE plug 32A, 400V, 5p with
lead 3 m H07RN-F5G4



Order no. **5202244**

Components:

8 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry/Input::

CEE inlet 32A, 400V, 5p



Order no. **5201003**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

3 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
2 C-type MCBs 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/Input::

CEE inlet 63A, 400V, 5p



Order no. **5202245**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
2 C-type MCBs 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/Input::

CEE plug 63A, 400V, 5p with
lead 3 m H07RN-F5G10



Order no. **5202470**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Protection:


2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
2 C-type MCBs 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry/Input::

CEE inlet 63A, 400V, 5p



- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

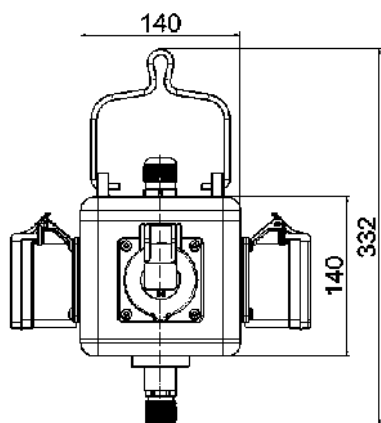

13MB045

- Dimension of enclosure: 140 x 140 mm
- Enclosure made of high-quality, impact-resistant solid rubber
- Small, compact design
- Variable configuration
- Fuse protection and data systems safely protected behind an operating window
- Top and bottom in signal yellow
- Hanging bracket made of V2A stainless steel
- Easy connection and disconnection of loads by means of knob or grip hook
- Unproblematic connection of supply cable by means of specially developed clamping ring

Order no. **57092****Components:**

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Cable entry:

1x M25

Connection option:for 1 cable up to 5 x 10 mm²Order no. **57076****Components:**

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Cable entry:

1x M25

Connection option:for 1 cable up to 5 x 10 mm²Order no. **57078****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Cable entry:

1x M25

Connection option:for 1 cable up to 5 x 10 mm²Order no. **57117****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 compressed air connection:
(Input: 1/2" pipe with external thread;
Output: 1/2" quick-release connector)

Cable entry:

1x M25

Connection option:for 1 cable up to 5 x 10 mm²Order no. **57116****Components:**

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 compressed air connection:
(Input: 1/2" pipe with external thread;
Output: 1/2" quick-release connector)

Cable entry:

1x M25

Connection option:for 1 cable up to 5 x 10 mm²Order no. **57119****Components:**

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 compressed air connection:
(Input: 1/2" pipe with external thread;
Output: 1/2" quick-release connector)

Cable entry:

1x M25

Connection option:for 1 cable up to 5 x 10 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing



Order no. **571121**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 compressed air connection
(Input: 1/2" hose connector NW 13 mm
Output: 1/2" two-way quick-release connector)

Cable entry:

2x M25 (2 circuits)

Connection option:

for 2 cables up to 5 x 10 mm²



Order no. **573395**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
4 data sockets RJ45/ Cat. 6

Cable entry:

1x M25, 1x M32

Connection option:

for 1 cable up to 5 x 10 mm²



Order no. **57829**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

1 RCCB 40/0.03A, 4p

Cable entry:

1x M25

Connection option:

for 1 cable up to 5 x 10 mm²



Order no. **57250**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Cable entry:

1x M25, 1x M32 (2 circuits)

Connection option:

for 2 cables up to 5 x 10 mm²



Order no. **57986**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Cable entry:

1x M25

Connection option:

for 1 cable up to 5 x 10 mm²



Order no. **57074**

Components:

4 CEE sockets 16A, 400V, 5p

Cable entry:

1x M25

Connection option:

for 1 cable up to 5 x 10 mm²



Order no. **571276**

Components:

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:

1 RCCB 40/0.03A, 4p

Cable entry:

1x M25

Connection option:

for 1 cable up to 5 x 10 mm²



Order no. **570531**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 empty space for data sockets

Cable entry:

2x M25

Connection option:

for 1 cable up to 5 x 10 mm²

- Ready wired for installation
- Protection degree IP44
- All distributors on this page with domestic sockets, German earthing

Order no. **573143****Components:**

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 data sockets RJ45/ Cat. 6

Cable entry:
2x M25

Connection option:
for 1 cable up to 5 x 10 mm²

Order no. **572231****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Protection:
1 RCCB 40/0.03A, 4p

Cable entry:
1x M25

Connection option:
for 1 cable up to 5 x 10 mm²

Order no. **57963****Components:**

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:
1 RCCB 25/0.03A, 2p

Cable entry:
1x M25

Connection option:
for 1 cable up to 3 x 10 mm²

Order no. **570451****Components:**

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:
1 RCCB 40/0.03A, 4p

Cable entry:
1x M20

Connection option:
for 1 cable up to 5 x 10 mm²

Order no. **57711****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 compressed air connection:
(Input: 1/2" pipe with external thread;
Output: 1/2" quick-release connector)

Cable entry:
1x M25, 1x M32 (2 circuits)

Connection option:
for 2 cables up to 5 x 10 mm²

Order no. **573151****Components:**

6 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 data sockets RJ45/ Cat. 6

Cable entry:
2x M25

Connection option:
for 1 cable up to 5 x 10 mm²

Order no. **57360****Components:**

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 empty space for data sockets

Cable entry:
2x M25

Connection option:
for 1 cable up to 5 x 10 mm²

Order no. **571370****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
with child protection
2 laboratory sockets yellow/green, earth
potential
Laboratory sockets 2x blue and 2x red
DC extra-low voltage
2 laboratory sockets yellow, AC
extra-low voltage

Cable entry:
4x M20

Connection option:
for 1 cable up to 3 x 10 mm²

Cable Gland



- Black
- Protection degree IP67

Thread	Sealing range	Order no.
M12	3-6 mm	580647
M20	8-13 mm	580648
M25	11-17 mm	580649
M32	15-21 mm	580650
M40	19-28 mm	580651
Multiple sealing insert		
for M25	2x8 mm	580652
for M32	4x8 mm	580653

Cable Gland with Pressure Equalization

The use of pressure equalization cable glands allows the internal pressure to adjust to the ambient pressure. The type-tested protection degree of the enclosure is fully retained. Temperature fluctuations, intense sunlight, or a sudden change in weather can cause condensation to form in combination enclosures. Basically, condensation can form in all sealed solid-rubber distributors. The higher the protection degree is, the more likely the formation of condensation will be.

We therefore recommend, especially in the case of distributors with protection degree IP67, the use of pressure equalization cable glands.



- Minimised condensation formation and therefore reduction in downtimes and time-consuming and expensive repair work
- No expensive and high-maintenance ventilation technology required
- No drip holes which reduce the level of protection
- With air ducts for pressure equalization
- black
- Protection degree IP67

Thread	Sealing range	Order no.
M20	6-13 mm	580656
M25	9-17 mm	580657
M32	13-21 mm	580658
M40	16-28 mm	580659

Mounting Set



- For MODBOX and MODBOX-Midi
- Consisting of:
4 screws 6 x 60 mm
4 screw dowels 8 x 51 mm

Order no. **580640**

Portable Stand



- For MODBOX and MODBOXMidi
- Hot-dip galvanised steel tubing
- Folding
- Weight 4 kg
- Dimensions: 350/570 x 780 x 540 mm (W x H x D)

Order no. **580721**

Lock set



- For MODBOX operating window
- With locking cylinder and 2 keys

Order no. **58037-BE**



- For MODBOX-Midi OTC window
- With long shackle and 2 keys

Order no. **580642**

Power-Port Free-Standing Distributor without door



- Only for MODBOX-Midi
- Enclosure dimensions 1300 x 350 x 275 mm (H x W x D)
- Enclosure made of high-quality V2A stainless steel
- Ground metal surface
- Moveable panel for concealing cables
- Base plate suitable for pedestal mounting
- Available in different colours (optional)

Order no. **580589**

Power-Port Free-Standing Distributor with door



- Only for MODBOX-Midi
- Enclosure dimensions 1300 x 350 x 415 mm (H x W x D)
- Enclosure made of high-quality V2A stainless steel
- Ground metal surface
- Moveable panel for concealing cables
- Base plate suitable for pedestal mounting
- Door with box lock and single profile cylinder, internal hinges
- Brush seal prevents dirt and dust from entering when door is closed
- Outgoing cables can be guided out through brush-sealed opening on front side
- Available in different colours (optional)

Order no. **580508**





Bollards


Distribution Bollards



Pages 220, 230 - 249

Stainless-Steel Distributors

Varia-Cubes



Page 219

Surface Mounting and Flush Mounting Cabinets



Pages 222 - 225

Power-Port Free-Standing Distributors



Page 226

Rain Shields, Concrete Bases



Page 226

Empty Enclosures

Plastic Enclosures



Page 227

Accessories




Page 228

Evobox

EVOBOX



Seite 230, 231

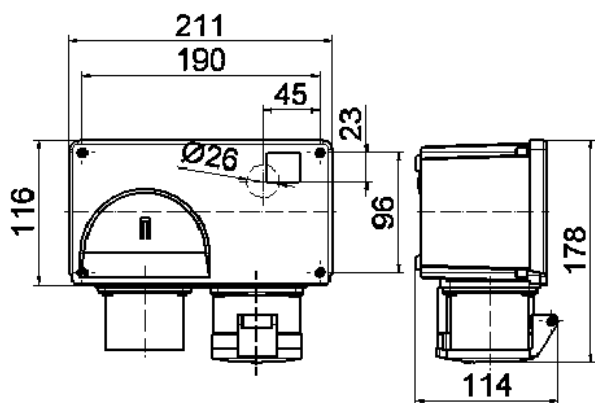

30 MB 173

- Dimension of enclosure: 211 x 116 mm
- Ready wired for installation
- Enclosure made of high-grade, impact-resistant plastic
- Small, compact design
- Variable configuration

Order no. **591**

Components:

1 CEE socket 16A, 400V, 5p

Cable entry:

1 CEE inlet 16A, 400V, 5p




Order no. **592**

Components:

1 CEE socket 32A, 400V, 5p

Cable entry:

1 CEE inlet 32A, 400V, 5p

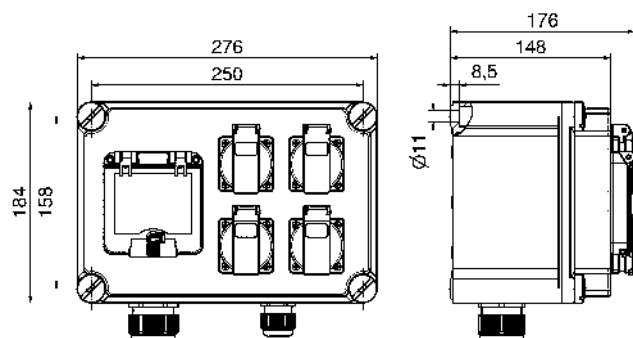

30 MB 229

- Dimension of enclosure: 276 x 184 mm
- Ready wired for installation
- Enclosure made of high-grade, impact-resistant plastic
- Window
 - lockable
 - with protection against accidental contact and label field
 - with locking function for orderly cable routing

VARIABOX -S

Order no. **893059**

Components:

8 RJ45 Cat. 6 socket inserts 8-pole shielded under transparent window

Cable entry:

2 x M32 with
Multiple sealing insert 4 x 8 mm



VARIABOX -S

Order no. **893058**

Components:


2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
4 RJ45 Cat. 6 socket inserts 8-pole shielded under transparent window

Cable entry:

1 x M20
1 x M32 with
Multiple sealing insert 4 x 8 mm




- Ready wired for installation
- Protection degree IP44, IP54, IP67

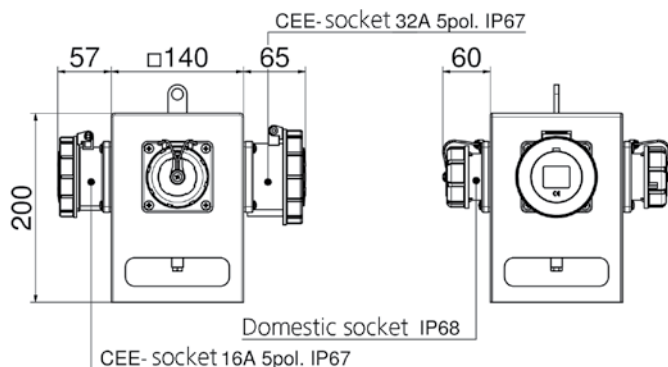

- Dimension of enclosure: 140 x 140 mm
- Enclosure made of high-quality V4A stainless steel
- Brushed surface
- Suitable for food industry and hygienic areas
- Easy-to-clean surface
- With hanging clips and recessed handles

45 MB 53

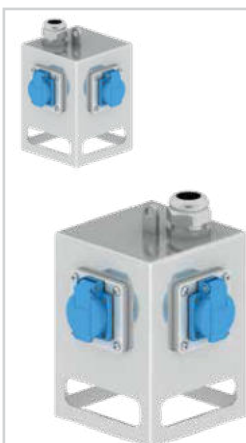

Order no. **573358**


Components:

4 Domestic sockets 16A, 230V, IP54
(system F - German earthing System)

Cable entry:

1x M32 cable gland (V4A)
incl. reducer seal M25

Ready wired for installation on
clamping ring

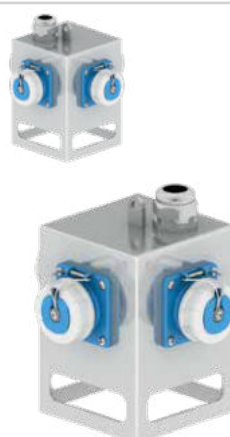

Order no. **573396**

Components:

4 Domestic sockets 16A, 230V, IP67
(system F - German earthing System)

Cable entry:

1x M32 cable gland (V4A)
incl. reducer seal M25

Ready wired for installation on
clamping ring



Order no. **573518**

Components:

3 Domestic sockets 16A, 230V, IP54
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p, IP54

Cable entry:

1x M32 cable gland (V4A)
incl. reducer seal M25

Ready wired for installation on
clamping ring



Order no. **573210**

Components:

3 Domestic sockets 16A, 230V, IP67
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p, IP67

Cable entry:

1x M32 cable gland (V4A)
incl. reducer seal M25

Ready wired for installation on
clamping ring



Order no. **573512**

Components:

2 Domestic sockets 16A, 230V, IP54
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p, IP54
1 CEE socket 32A, 400V, 5p, IP54

Cable entry:

1x M32 cable gland (V4A)
incl. reducer seal M25

Ready wired for installation on
2 separate circuits (16A/32A)



Order no. **573209**


Components:

2 Domestic sockets 16A, 230V, IP67
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p, IP67
1 CEE socket 32A, 400V, 5p, IP67

Cable entry:

1x M32 cable gland (V4A)
incl. reducer seal M25

Ready wired for installation on
2 separate circuits (16A/32A)



45 MB 76

- Dimension of enclosure: 1355 x 250 mm
- Made of robust, hot-dip galvanised steel enclosure
- Ideal for safe energy distribution outdoors
- Vandal-proof owing to internally hinged door
- Lockable door with cylinder lock
- Cable outlet in door allows locking in connected state
- Safe protection of fuse elements behind operating window
- Suitable for base mounting
- RAL 7016; other colours possible on request
- Concrete base: see page 260

Order no. **561090****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Connection option:

for 2 cables up to 5 x 25 mm²

Order no. **562372****Components:**


2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p

Connection option:

for 2 cables up to 5 x 25 mm²

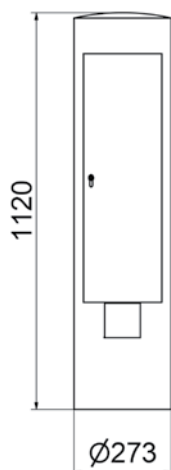

45 MB 74

- Dimension of enclosure: 1120 x 273 mm
- Protection degree IP44
- Made of robust, hot-dip galvanised steel enclosure
- Ideal for safe energy distribution outdoors
- Vandal-proof owing to internally hinged door
- Lockable door with cylinder lock
- Cable outlet in door allows locking in connected state
- Suitable for base mounting
- RAL 7016; other colours possible on request
- Concrete base: see page 260

Order no. **562389****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry:

2x M40

Connection option:

for 2 cables up to 5 x 25 mm²

Order no. **562390****Components:**

3 Domestic sockets 16A, 230V ~
(system F - German earthing System)

Protection:

3 C-type MCBs 16A, 1p
1 RCCB 40/0.03A, 4p

Cable entry:


2x M40

Connection option:

for 1 cable up to 5 x 10 mm²

Distribution Bollards

- Ready wired for installation
- Protection degree IP44

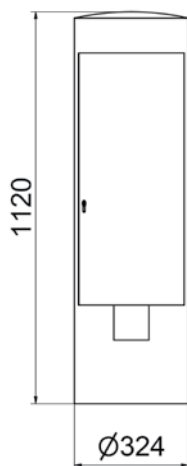

45 MB 73

- Dimension of enclosure: 1120 x 324 mm
- Protection degree IP44
- Made of robust, hot-dip galvanised steel enclosure
- Ideal for safe energy distribution outdoors
- Vandal-proof owing to internally hinged door
- Lockable door with cylinder lock
- Cable outlet in door allows locking in connected state
- Suitable for base mounting
- RAL 7016; other colours possible on request
- Concrete base: see page 260

Order no. **562391****Components:**

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Cable entry:

2x M40

Connection option:for 2 cables up to 5 x 25 mm²Order no. **562392****Components:**


2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry:

2x M40

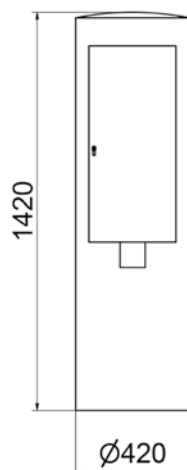Connection option:for 2 cables up to 5 x 25 mm²

45 MB 75

- Dimension of enclosure: 1420 x 420 mm
- Protection degree IP44
- Made of robust, hot-dip galvanised steel enclosure
- Ideal for safe energy distribution outdoors
- Vandal-proof owing to internally hinged door
- Lockable door with cylinder lock
- Cable outlet in door allows locking in connected state
- Suitable for base mounting
- RAL 7016; other colours possible on request
- Concrete base: see page 260

Order no. **562366****Components:**

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 C-type MCB 63A, 3p
1 RCCB 63/0.03A, 4p

Cable entry:

2x M50

Connection option:for 2 cables up to 5 x 25 mm²Order no. **562393****Components:**

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:


4 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry:

2x M40

Connection option:for 2 cable up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44

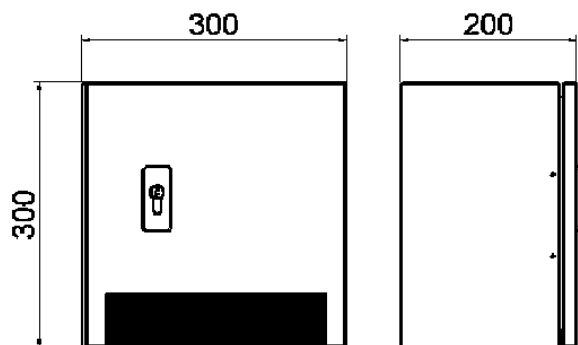

45 MB 50

- Dimension of enclosure: 300 x 300 mm
- Enclosure made of high-quality V2A stainless steel
- Brushed surface
- Door with box lock and single profile cylinder
- Wall mounting brackets, supplied loose
- Brush seal prevents dirt and dust from entering when door is closed
- Lockable in connected state
- Outgoing cables can be guided out through brush-sealed opening on front side
- Easy access to operating elements



Order no. **560967**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Cable entry at bottom:

1x M20, 1x M25, 1x M32

Connection option:

for 1 cable 3 x 4 mm² and
1 cable 5 x 4 mm²



Order no. **560508**

Components:


1 Domestic socket 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Cable entry at bottom:

1x M20, 1x M25, 1x M32

Connection option:

for 1 cable 3 x 4 mm²,
1 cable 5 x 4 mm² and
1 cable 5 x 6 mm²

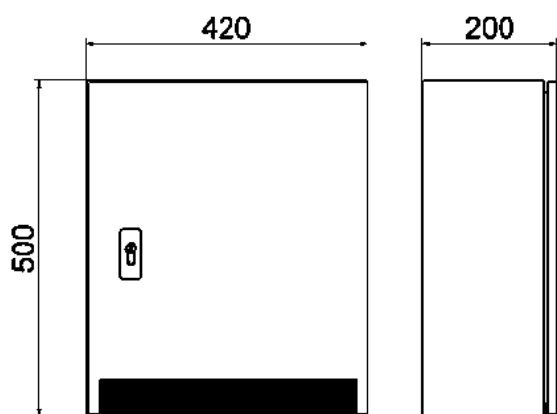

45 MB 17

- Dimension of enclosure: 500 x 420 mm
- Enclosure made of high-quality V2A stainless steel
- Brushed surface
- Door with box lock and single profile cylinder
- Wall mounting brackets, supplied loose
- Brush seal prevents dirt and dust from entering when door is closed
- Lockable in connected state
- Outgoing cables can be guided out through brush-sealed opening on front side
- Easy access to operating elements



Order no. **560384**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at bottom:

1x M25, 1x M32, 1x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **562373**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 RCCB 40/0.03A, 4p


Cable entry at bottom:

1x M25, 1x M32, 1x M40

Connection option:

for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44

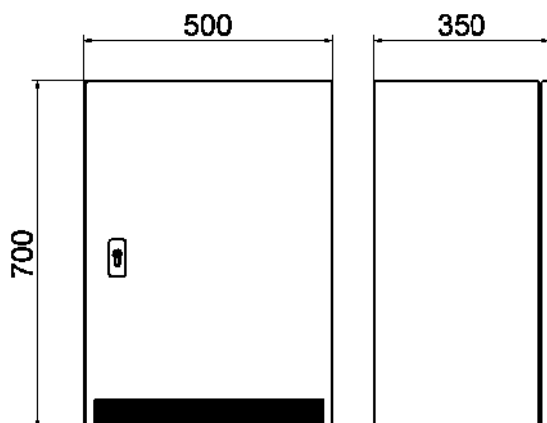

45 MB 45

- Dimension of enclosure: 700 x 500 mm
- Enclosure made of high-quality V2A stainless steel
- Brushed surface
- Door with box lock and single profile cylinder
- Wall mounting brackets, supplied loose
- Brush seal prevents dirt and dust from entering when door is closed
- Lockable in connected state
- Outgoing cables can be guided out through brush-sealed opening on front side
- Easy access to operating elements



Order no. **562374**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 C-type MCB 63A, 3p
2 RCCB 63/0.03A, 4p
2 fuse bases D02, 3p

Cable entry at bottom:
2x M63

Connection option:
for 2 cables up to 5 x 5 mm²



Order no. **562377**

Components:


4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
2 C-type MCBs 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at bottom:
1x M40, 1x M50, 1x M63

Connection option:
for 2 cables up to 5 x 25 mm²

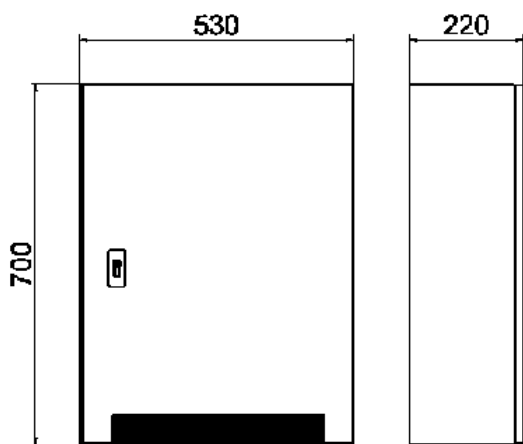

45 MB 29

- Dimension of enclosure: 700 x 530 mm
- Enclosure made of high-quality V2A stainless steel
- Brushed surface
- Door with box lock and single profile cylinder
- Wall mounting brackets, supplied loose
- Brush seal prevents dirt and dust from entering when door is closed
- Lockable in connected state
- Outgoing cables can be guided out through brush-sealed opening on front side
- Easy access to operating elements



Order no. **561449**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at bottom:
1x M32, 1x M40, 1x M50

Connection option:
for 2 cables up to 5 x 25 mm²



Order no. **562306**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p


Protection:

4 C-type MCBs 16A, 1p
1 C-type MCB 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at bottom:
1x M32, 1x M40, 1x M50

Connection option:
for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44

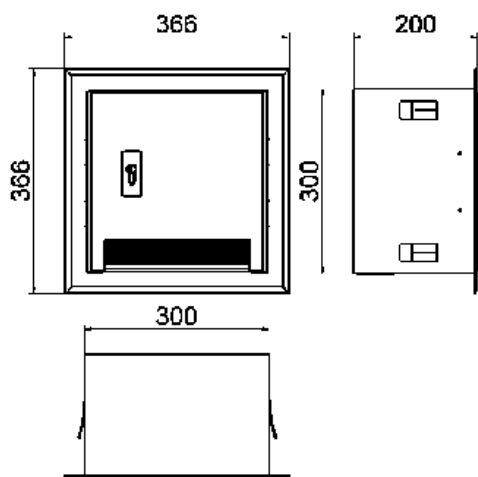

45 MB 51

- Dimension of enclosure: 300 x 300 mm
- Enclosure made of high-quality V2A stainless steel
- Brushed surface
- Door with box lock and single profile cylinder
- Flush-mount adapter frame
- Brush seal prevents dirt and dust from entering when door is closed
- Outgoing cables can be guided out through brush-sealed opening on front side
- Door lockable in connected state
- Easy access to operating elements



Order no. **560509**

Components:

- 1 Domestic socket 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Cable entry at bottom:

1x M20, 1x M25, 1x M32

Connection option:

for 1 cable up to 3 x 4 mm²,
1 cable up to 5 x 4 mm²
and 1 cable up to 5 x 6 mm²



Order no. **560965**

Components:


- 2 Domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p

Cable entry at bottom:

1x M20, 1x M25, 1x M32

Connection option:

for 1 cable up to 5 x 6 mm²

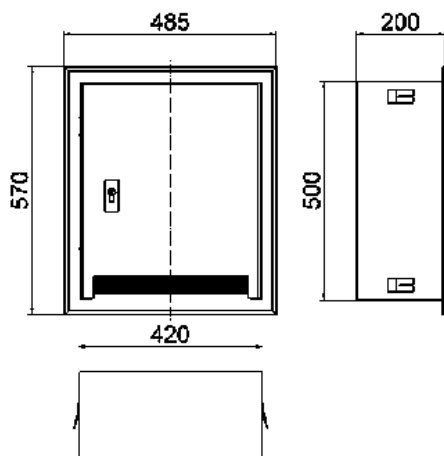

45 MB 21

- Dimension of enclosure: 500 x 420 mm
- Enclosure made of high-quality V2A stainless steel
- Brushed surface
- Door with box lock and single profile cylinder
- Flush-mount adapter frame
- Brush seal prevents dirt and dust from entering when door is closed
- Outgoing cables can be guided out through brush-sealed opening on front side
- Door lockable in connected state
- Easy access to operating elements



Order no. **561844**

Components:

- 2 Domestic sockets 16A, 230V ~ (system F - German earthing System)
- 1 CEE socket 16A, 400V, 5p
- 1 CEE socket 32A, 400V, 5p

Protection:

- 2 C-type MCBs 16A, 1p
- 1 C-type MCB 16A, 3p
- 1 C-type MCB 32A, 3p
- 1 RCCB 63/0.03A, 4p

Cable entry at bottom:

1x M25, 1x M32, 1x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **562379**

Components:

- 2 Domestic sockets 16A, 230V ~ (system F - German earthing System)
- 2 CEE sockets 16A, 400V, 5p

Protection:

- 2 C-type MCBs 16A, 1p
- 2 C-type MCBs 16A, 3p
- 1 RCCB 40/0.03A, 4p


Cable entry at bottom:

1x M25, 1x M32, 1x M40

Connection option:

for 2 cables up to 5 x 25 mm²

- Ready wired for installation
- Protection degree IP44

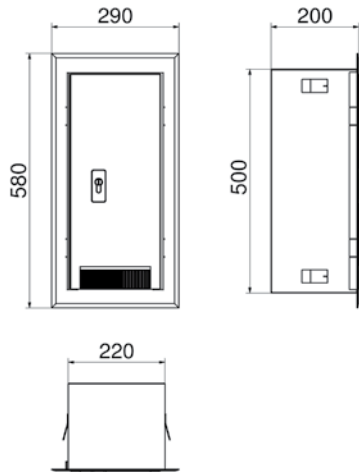

45 MB 68

- Dimension of enclosure: 500 x 220 mm
- Enclosure made of high-quality V2A stainless steel
- Brushed surface
- Door with box lock and single profile cylinder
- Flush-mount adapter frame
- Brush seal prevents dirt and dust from entering when door is closed
- Outgoing cables can be guided out through brush-sealed opening on front side
- Door lockable in connected state
- Easy access to operating elements



Order no. **561872**

Components:

1 Domestic socket 16A, 230V ~
(system F - German earthing System)
1 CEE socket 16A, 400V, 5p

Protection:

1 C-type MCB 16A, 1p
1 C-type MCB 16A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at bottom:

1x M32, 1x M40

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **562378**

Components:

1 Domestic socket 16A, 230V ~
(system F - German earthing System)
1 CEE socket 32A, 400V, 5p

Protection:


1 C-type MCB 16A, 1p
1 C-type MCB 32A, 3p
1 RCCB 40/0.03A, 4p

Cable entry at bottom:

1x M32, 1x M40

Connection option:

for 2 cables up to 5 x 25 mm²

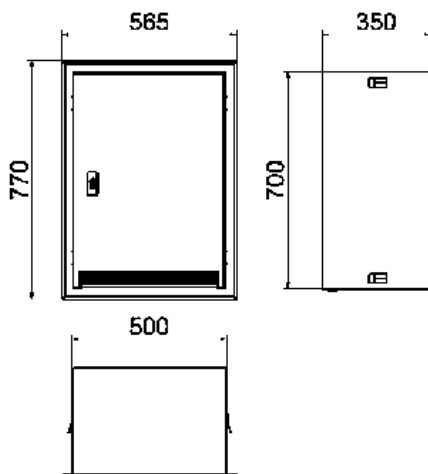

45 MB 46

- Dimension of enclosure: 700 x 500 mm
- Enclosure made of high-quality V2A stainless steel
- Brushed surface
- Door with box lock and single profile cylinder
- Flush-mount adapter frame
- Brush seal prevents dirt and dust from entering when door is closed
- Outgoing cables can be guided out through brush-sealed opening on front side
- Door lockable in connected state
- Easy access to operating elements



Order no. **562380**

Components:

2 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
1 CEE socket 32A, 400V, 5p
1 CEE socket 63A, 400V, 5p

Protection:

2 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
1 C-type MCB 32A, 3p
1 RCCB 63/0.03A, 4p

Cable entry at bottom:

1x M40, 1x M50, 1x M63

Connection option:

for 2 cables up to 5 x 25 mm²



Order no. **562376**

Components:

4 Domestic sockets 16A, 230V ~
(system F - German earthing System)
2 CEE sockets 16A, 400V, 5p
2 CEE sockets 32A, 400V, 5p

Protection:

4 C-type MCBs 16A, 1p
2 C-type MCBs 16A, 3p
2 C-type MCBs 32A, 3p
1 RCCB 63/0.03A, 4p


Cable entry at bottom:

1x M40, 1x M50, 1x M63

Connection option:

for 2 cables up to 5 x 25 mm²


Power-Port Free-Standing Distributor without door

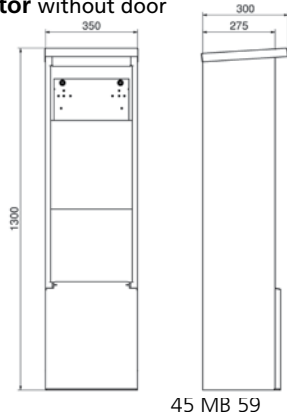

- Dimension of enclosure: 1300 x 350 x 275 mm
- Enclosure made of high-quality V2A stainless steel
- Brushed surface
- Mounting plate for fitting Bals enclosures
- Moveable panel for concealing cables
- Base plate suitable for pedestal mounting
- Available in different colours (optional)

Order no. **580589**

Power-Port Free-Standing Distributor with door

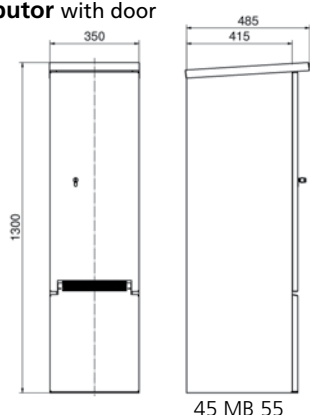

- Dimension of enclosure: 1300 x 350 x 415 mm
- Enclosure made of high-quality V2A stainless steel
- Brushed surface
- Door with box lock and single profile cylinder, internal hinges
- Mounting plate for fitting Bals enclosures
- Brush seal prevents dirt and dust from entering when door is closed
- Outgoing cables can be guided out through brush-sealed opening on front side
- Moveable panel for concealing cable
- Base plate suitable for pedestal mounting
- Available in different colours (optional)

Order no. **580508**

Protective Rain Canopy


- Enclosure made of high-quality V2A stainless steel
- With side panels
- Brushed surface
- Mounting plate for fitting VARIABOXES
- Available in RAL colours (optional)



Dimensions (mm)	for VARIABOX	Order no.
545x286x328	S, M, L	580511
792x286x328	XL, XXL	580529
662x516x328	L DUO, XL DUO	580521

Concrete Bases

- For ground/floor attachment




For Power Ports and bollards $\varnothing$ 273 mm and $\varnothing$ 324 mm

Order no. **58370**

For bollards $\varnothing$ 250 mm

58372



Distributor Enclosure

- Made of high-grade, impact-resistant plastic
- Cover screws made of plastic

Metric cable entry on request.

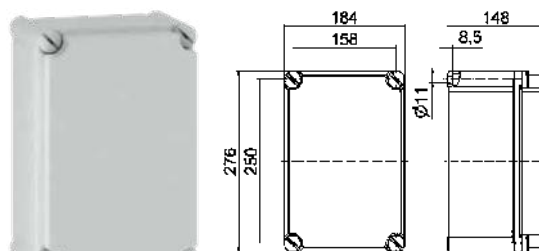


Fig.: Type 61133

30 MB 121

Order number

61133

Distributor Enclosure

- Made of high-grade, impact-resistant plastic
- Cover screws made of plastic

Metric cable entry on request.

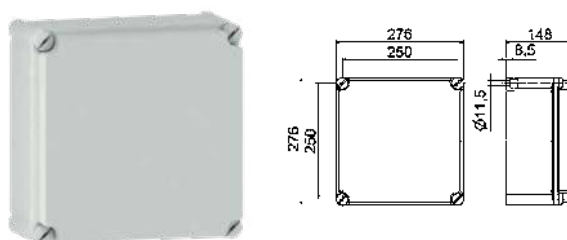


Fig.: Type 61134

30 MB 122

Order number

61134

Distributor Enclosure

- Made of high-grade, impact-resistant plastic
- With transparent hinged window
- 9 modules
- Cover screws made of plastic
- DIN rail

Metric cable entry on request.

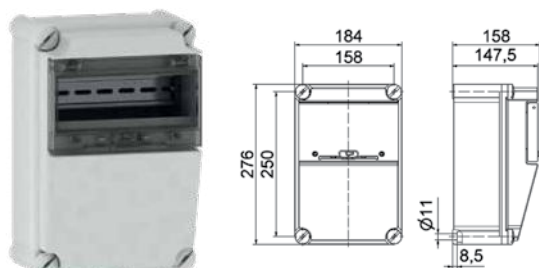


Fig.: Type 61402

30 MB 145

Order number

61402

Distributor Enclosure

- Made of high-grade, impact-resistant plastic
- Cover screws made of plastic

Metric cable entry on request.

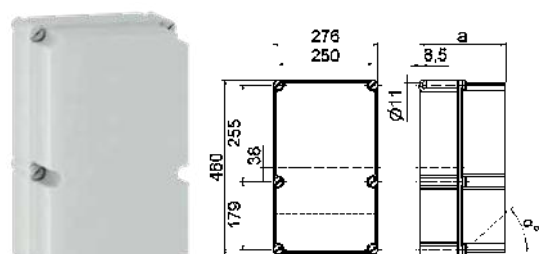


Fig.: Type 6170

30 MB 98

α	a	Order number
0°	148	6171
0°	228	6170
25°	228	6173
42°	228	6172

Mounting plate **58040**

Distributor Enclosure

- Made of high-grade, impact-resistant plastic
- Cover screws made of plastic

Metric cable entry on request.

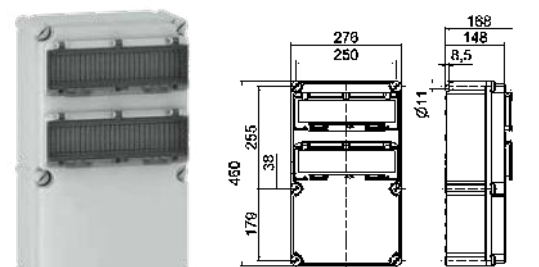


Fig.: Type 61101

30 MB 137

Order number

61101

2 hinged windows for every 13 modules on top-hat rail

61128


3 hinged windows for every 13 modules on top-hat rail

Mounting plate

58040

Hinged Window

- Self-closing
- With protection against accidental contact

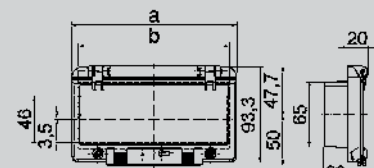

30 MB 96




Fig.: Type 58009

Module unit	Dimension a	Dimension b	Order number
2	55.0	40.5	5881
4	91.0	76.5	5890
6	127.0	112.5	5899
8	162.0	147.5	58009
12	234.0	220.0	58018
13	257.5	248.5	58027

In the case of hinged windows for use with DIN screws (order No. 58036), add -GWE to the end of the order number.

Hinged Window

- Self-closing
- Without protection against accidental contact



30 MB 95




Fig.: Type 58010

Module unit	Dimension a	Dimension b	Order number
2	55.0	37.0	5882
4	91.0	73.0	5891
6	127.0	109.0	58001
8	162.0	144.5	58010
12	234.0	217.0	58019
13	257.5	240.0	58028

In the case of hinged windows for use with DIN screws (order No. 58036), add -GWE to the end of the order number.

Hinged Window

- Self-closing
- With protection against accidental contact and mounting bracket



30 MB 97

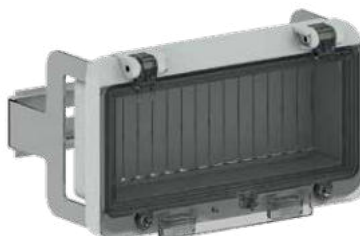


Fig.: Type 58013

Module unit	Dimension a	Dimension b	Order number
2	55.0	40.5	5885
4	91.0	76.5	5894
6	127.0	112.5	58004
8	162.0	147.5	58013
12	234.0	220.0	58022
13	257.5	248.5	58031

In the case of hinged windows for use with DIN screws (order No. 58036), add -GWE to the end of the order number.

Lock Set

- Protection against unauthorised use by means of retrofittable lock
- Can be installed in hinged window



Fig.: Type 58037-BE

Order number

58037-BE**DIN Screws**

- For additional locking device
- Retrofittable



Fig.: Type 58036

Can only be used in operating windows with order No.-GWE.

Order number

58036

The new EVOBOX series is the ideal solution for mobile power supply in industry, on construction sites or in event technology. The portable distributor series is available in 4 coordinated housing sizes and impresses with its high mechanical and thermal capacity.


- Light and easy-to-handle, using hard Polyethylene
- Overall protection degree of the distributor is IP54
- High mechanical and thermal capacity
- Perfectly stackable
- Maintenance-free Quick-Connect technology for CEE and domestic sockets
- Available in 4 different sizes
- Fuse elements protected under robust operating window
- No protruding components
- With 2 integrated carry handles
- Pre-punched recesses make it possible to affix inscription labels
- All distributors are equipped with an earthing screw (external earthing screw) outside the housing as standard
- Distributor outlets and fuse elements each separately on one side



Optional also equipped with Power Lock



Lateral recesses for inscription labels

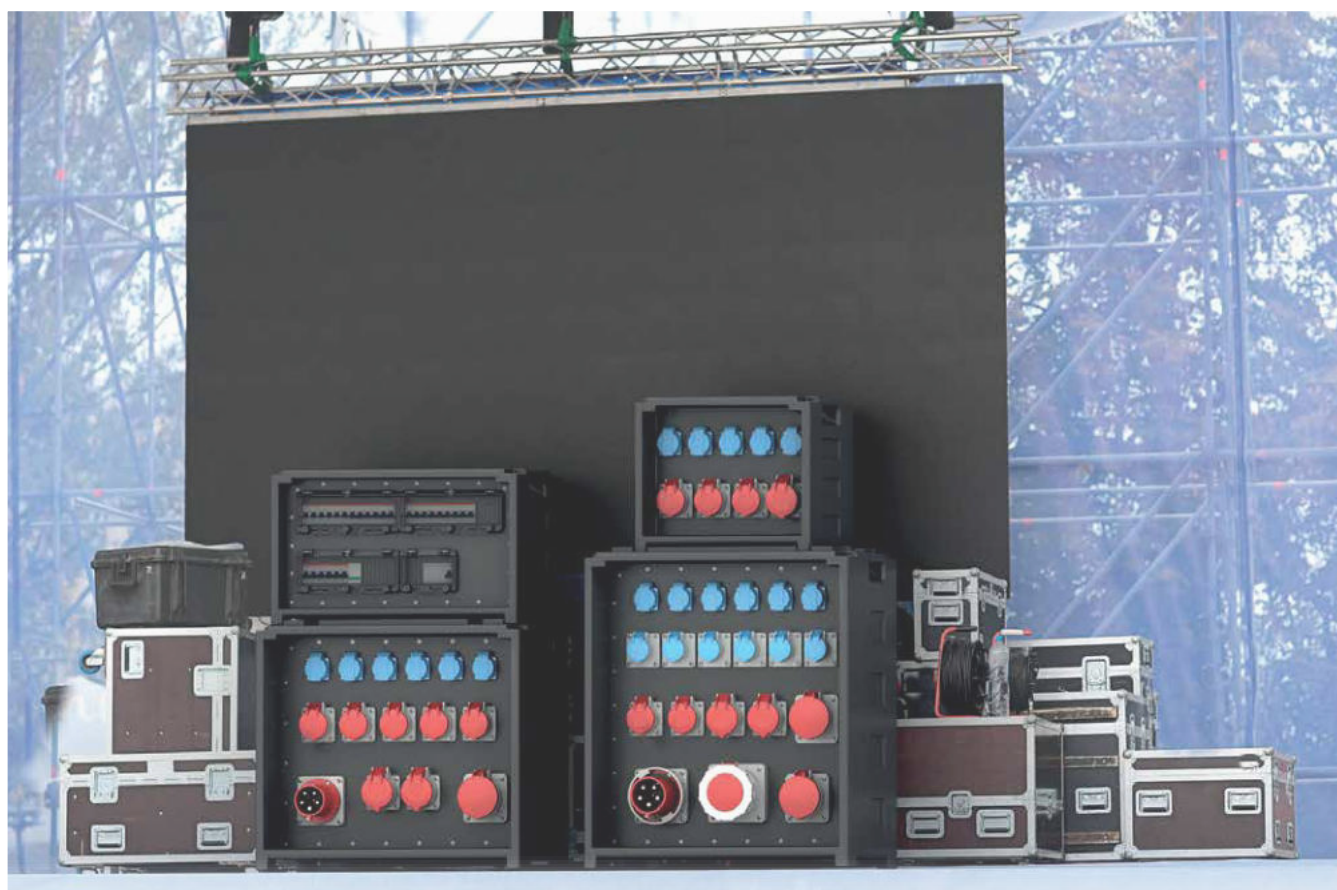

- The fuse for the CEE socket phases is optionally 1 pole or multi-pole
- The internal wiring is designed for the highest possible safety via the specification standard
- The CEE sockets have been arranged so the IP67 plugs and sockets can be plugged in easily
- The domestic sockets are equipped with additional sealing edges as standard in accordance with DIN VDE 0620 for portable distributors.

Optional:

- All panel mounting sockets are available in version IP67
- Phase control lights are easily visible under operating windows
- The built-in connector systems are also available completely in black
- The housing can be blue, red and orange (quantity dependent)
- Installation of overvoltage protection





Safe to stack even with different EVOBOX distributor sizes





External earthing screw

EVOBOX -S





30MB235

EVOBOX -M





30MB236

EVOBOX -L



30MB237

EVOBOX -XL

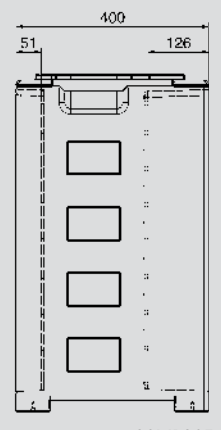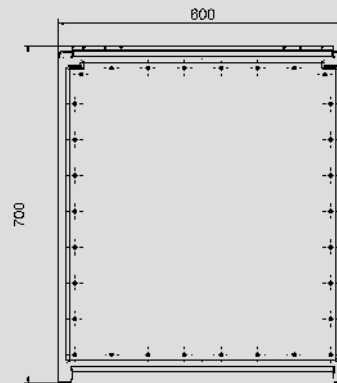

30MB205